

# ADAM-5024

# ADAM-5050

# ADAM-5051/D/S

Vertrieb durch **AMC**  
**AMC – Analytik & Messtechnik GmbH Chemnitz**  
 Heinrich-Lorenz-Str. 55 Tel.: +49/371/38388-0  
 09120 Chemnitz Fax: +49/371/38388-99  
 E-Mail: info@amc-systeme.de Web: www.amc-systeme.de

**4-ch Analog Output Module**

**16-ch Universal Digital I/O Module**


**16-ch Digital Input Module**



ADAM-5024



ADAM-5050

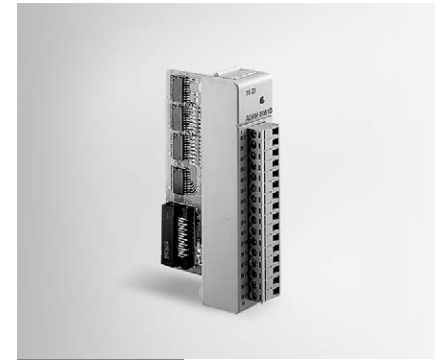

ADAM-5051  
ADAM-5051D  
ADAM-5051S

## Specifications

### General

- **Certification** CE, FM
- **Connectors** 1 x Plug-in screw terminal (# 14 ~ 22 AWG)
- **Enclosure** ABS+PC
- **Power Consumption** 2.9 W (max.)

### Analog Output

- **Accuracy** ±0.1% of FSR for current output  
±0.2% of FSR for voltage output
- **Channels** 4
- **Current Load Resistor** 0 ~ 500 Ω (source)
- **Output Type** mA, V
- **Output Range** 0 ~ 20 mA, 4 ~ 20 mA, 0 ~ 10 V
- **Programmable Output Slope** 0.125 ~ 128.0 mA/sec.  
0.0625 ~ 64.0 V/sec.
- **Resolution** 12-bit
- **Resolution** ±0.015% of FSR
- **Span Temperature Coefficient** ±25 PPM/°C
- **Zero Drift** Voltage: ±30 μV/°C  
Current: ±0.2 μA/°C

### Protection

- **Isolation Voltage** 3,000 V<sub>DC</sub>

## Ordering Information

- **ADAM-5024** 4-ch Analog Output Module

## Specifications

### General

- **Certification** CE, FM
- **Connectors** 1 x Plug-in screw terminal (# 14 ~ 22 AWG)
- **Enclosure** ABS+PC
- **Power Consumption** 1.2 W (max.)

### Digital I/O

- **Channels** 16
- **Channel I/O Type** Bit-wise selectable by DIP switch
- **Digital Input** Dry Contact:  
Logic level 0: close to GND  
Logic level 1: open  
Wet Contact:  
Logic level 0: 2 V max.  
Logic level 1: 4 ~ 30 V
- **Digital Output** Open collector to 30 V,  
100 mA and 450 mW max. load
- **Power Dissipation** 300 mW for each channel

## Ordering Information

- **ADAM-5050** 16-ch Universal Digital Input/Output Module

## Specifications

### General

- **Certification** CE
- **Connectors** ADAM-5051/5051D: 1 x Plug-in screw terminal (# 14 ~ 22 AWG)  
ADAM-5051S: 1 x Plug-in screw terminal (# 14 ~ 28 AWG)
- **Enclosure** ABS+PC

### LED Indicators

- ADAM-5051D On: Input logic level 1  
Input floating  
Off: Input logic level 0
- ADAM-5051S On: Active  
Off: Inactive

### Power Consumption

- ADAM-5051: 0.53 W (max.)
- ADAM-5051D: 0.84 W (max.)
- ADAM-5051S: 0.8 W (max.)

### Digital Input

- **Circuit Type** Pull-up current: 0.5 mA (Source Type) -only for ADAM-5051/5051D
- **Channels** 16
- **Input Voltage** ADAM-5051/5051D: 30 V max  
ADAM-5051S: 50 V max
- **Logic Level** ADAM-5051/5051D Logic level 0: 1 V max.  
Logic level 1: 3.5 ~ 30 V  
ADAM-5051S Logic level 0: 3 V max.  
Logic level 1: 10 ~ 50 V

### Protection (Only for ADAM-5051S)

- **Optical Isolation** 2,500 V<sub>DC</sub>
- **Overvoltage Protection** 70 V<sub>DC</sub>

## Ordering Information

- **ADAM-5051** 16-ch Digital Input Module
- **ADAM-5051D** 16-ch Digital Input Module w/ LED
- **ADAM-5051S** 16-ch Isolated Digital Input Module w/ LED

- 1 WebAccess+ Solutions
- 2 Machine Automation
- 3 Energy Automation
- 4 Building Automation Systems
- 5 Automation Software
- 6 Operator Panels
- 7 Automation Panel PCs
- 8 Industrial Panel Computers & Panel PC
- 9 Industrial Monitors
- 10 Industrial Wireless Solutions
- 11 Industrial Ethernet Solutions
- 12 Serial Device Servers and IP Gateways
- 13 Serial Communication Cards
- 14 Embedded Automation Computers
- 15 PACs
- 16 Compact PCI Systems
- 17 M2M I/O Modules
- 18 RS-485 I/O Modules

