


# PCI-1752U PCI-1752USO

**64-ch Sink (NPN) Isolated Digital Output**  
**64-ch Source (PNP) Isolated Digital Output**

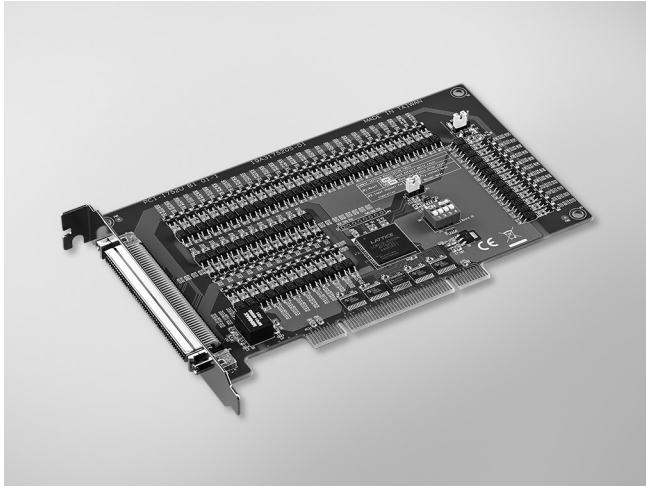

FCC CE RoHS

## Features

- 64-ch Sink Type (NPN) Isolated Digital Output Module (PCI-1752U Only)
- 64-ch Source Type (PNP) Isolated Digital Output Module (PCI-1752USO Only)
- High-voltage isolation on output channels (2,500 V<sub>DC</sub>)
- Wide output range (5 ~ 40 V<sub>DC</sub>)
- High-sink/source current on isolated output channels (200 mA max./channel)
- Output status readback
- Keeps the output settings and values after system hot reset
- Channel-freeze function
- High-density 100-pin SCSI connector

Vertrieb durch



**AMC – Analytik & Messtechnik GmbH Chemnitz**

Heinrich-Lorenz-Str. 55 Tel.: +49/371/38388-0  
09120 Chemnitz Fax: +49/371/38388-99  
E-Mail: info@amc-systeme.de Web: www.amc-systeme.de

## Introduction

The PCI-1752USO is a 64-CH source type isolated digital output which provides a 2,500 V isolation protection. It features a wide output range from 5 to 40V, which makes it suitable for industrial automation applications.

## Specifications

### Isolated Digital Input

- **Channels** 64 (16-ch/group)
- **Output Type** PCI-1752U: Sink (NPN)  
PCI-1752USO: Source (PNP)
- **Isolation Protection** 2,500 V<sub>DC</sub>
- **Output Voltage** 5 ~ 40 V<sub>DC</sub>
- **Sink/ Source Current** 200 mA max./channel
- **Opto-isolator Response** 100 μs

### General

- **Bus Type Universal** PCI V2.2
- **I/O Connectors** 1 x 100-pin SCSI female connector
- **Dimensions (L x H)** 175 x 100mm (6.9" x 3.9")
- **Power Consumption** Typical: 5 V @ 230 mA  
Max.: 5 V @ 500 mA
- **Operating Temperature** 0 ~ 60°C (32 ~ 140°F)
- **Storage Temperature** -20 ~ 70°C (-4 ~ 158°F)
- **Storage Humidity** 5 ~ 95%, RH non-condensing

## Ordering Information

- **PCI-1752U-BE** 64ch Sink(NPN) Type Isolated Digital Output Card
- **PCI-1752USO-BE** 64ch Source(PNP) Type Isolated Digital Output Card

### Accessories

- **PCL-10250-1E** 100-pin SCSI to Two 50-pin SCSI Cable, 1 m
- **PCL-10250-2E** 100-pin SCSI to Two 50-pin SCSI Cable, 2 m
- **ADAM-3951-BE** 50-pin DIN-rail Wiring Board w/ LED Indicators

Irrtum und Änderungen vorbehalten - auch ohne vorherige Ankündigung. Verwendete Hardware- und Softwarebezeichnungen, Marken sowie Firmennamen können eingetragene Warenzeichen sein und unterliegen somit den gesetzlichen Bestimmungen. / Information in this document is subject to change without prior practice. The software and hardware designations or brand names used in this text are in most cases trademarks of their respective companies and are thus subject to law.



ADANTECH iAutomation  
Premier Partner