

# AWK-3131A Series

## Industrial IEEE 802.11a/b/g/n wireless AP/bridge/client



- > IEEE 802.11a/b/g/n AP/bridge/client support
- > Seamless roaming with Turbo Roaming
- > Complete redundancy with AeroLink Protection
- > Integrated antenna and power isolation
- > -40 to 75°C operating temperature range (-T models)
- > 5 GHz DFS channel support



### Introduction

The AWK-3131A 3-in-1 industrial wireless AP/bridge/client meets the growing need for faster data transmission speeds by supporting IEEE 802.11n technology with a net data rate of up to 300 Mbps. The AWK-3131A is compliant with industrial standards and approvals covering operating temperature, power input voltage, surge, ESD, and vibration. The two redundant DC power inputs increase the reliability of the power supply, and the AWK-3131A can be powered via PoE to make deployment easier. The AWK-3131A can operate on either the 2.4 or 5 GHz bands and is backwards-compatible with existing 802.11a/b/g deployments to future-proof your wireless investments.

#### Advanced 802.11n Industrial Wireless Solution

- 802.11a/b/g/n compliant AP/bridge/client for flexible deployment
- Software optimized for long distance (LoS, 1 km) wireless communication with external high-gain antenna (available on 5 GHz)

- Supports 60 clients connected concurrently
- DFS channel support allows a wider range of 5 GHz channel selection to avoid existing wireless infrastructure and interference

#### Advanced Wireless Technology

- Seamless roaming with Client-based Turbo Roaming for < 150 ms roaming recovery time between APs (Client mode)
- Supports AeroLink Protection for creating a redundant wireless link (< 300 ms recovery time) between AP and clients (Client mode)

#### Industrial Ruggedness

- Integrated antenna and power isolation designed to provide 500 V insulation protection against external electrical interference
- Hazardous location wireless communication with Class I Div II and ATEX Zone 2 certifications
- -40 to 75°C wide operating temperature models (-T) provided for smooth wireless communication in harsh environments

### Specifications

#### WLAN Interface

##### Standards:

IEEE 802.11a/b/g/n for Wireless LAN  
 IEEE 802.11i for Wireless Security  
 IEEE 802.3 for 10BaseT  
 IEEE 802.3u for 100BaseT(X)  
 IEEE 802.3ab for 1000BaseT  
 IEEE 802.3af for Power-over-Ethernet  
 IEEE 802.1D for Spanning Tree Protocol  
 IEEE 802.1w for Rapid STP  
 IEEE 802.1Q for VLAN

##### Spread Spectrum and Modulation (typical):

- DSSS with DBPSK, DQPSK, CCK
- OFDM with BPSK, QPSK, 16QAM, 64QAM
- 802.11b: CCK @ 11/5.5 Mbps, DQPSK @ 2 Mbps, DBPSK @ 1 Mbps
- 802.11a/g: 64QAM @ 54/48 Mbps, 16QAM @ 36/24 Mbps, QPSK @ 18/12 Mbps, BPSK @ 9/6 Mbps
- 802.11n: 64QAM @ 300 Mbps to BPSK @ 6.5 Mbps (multiple rates supported)

#### Operating Channels (central frequency):

##### US:

2.412 to 2.462 GHz (11 channels)  
 5.180 to 5.240 GHz (4 channels)  
 5.260 to 5.320 GHz (4 channels)\*  
 5.500 to 5.700 GHz (8 channels, excluding 5.600 to 5.640 GHz)\*  
 5.745 to 5.825 GHz (5 channels)

##### EU:

2.412 to 2.472 GHz (13 channels)  
 5.180 to 5.240 GHz (4 channels)  
 5.260 to 5.320 GHz (4 channels)\*  
 5.500 to 5.700 GHz (11 channels)\*

##### JP:

2.412 to 2.484 GHz (14 channels)  
 5.180 to 5.240 GHz (4 channels)  
 5.260 to 5.320 GHz (4 channels)\*  
 5.500 to 5.700 GHz (11 channels)\*

\*DFS (Dynamic Frequency Selection) channel support: In AP mode, when a radar signal is detected, the device will automatically switch to another channel. However according to regulations, after switching channels, a 60-second availability check period is required before starting the service.



**Security:**

- SSID broadcast enable/disable
- Firewall for MAC/IP/Protocol/Port-based filtering
- 64-bit and 128-bit WEP encryption, WPA/WPA2-Personal and Enterprise (IEEE 802.1X/RADIUS, TKIP, and AES)

**Transmission Rates:**

802.11b: 1, 2, 5.5, 11 Mbps  
 802.11a/g: 6, 9, 12, 18, 24, 36, 48, 54 Mbps  
 802.11n: 6.5 to 300 Mbps (multiple rates supported)

**Transmitter Power:**

802.11b:  
 Typ. 26±1.5 dBm @ 1 Mbps, Typ. 26±1.5 dBm @ 2 Mbps  
 Typ. 26±1.5 dBm @ 5.5 Mbps, Typ. 25±1.5 dBm @ 11 Mbps  
 802.11g:  
 Typ. 23±1.5 dBm @ 6 to 24 Mbps, Typ. 22±1.5 dBm @ 36 Mbps  
 Typ. 20±1.5 dBm @ 48 Mbps, Typ. 19±1.5 dBm @ 54 Mbps  
 802.11n (2.4 GHz):  
 Typ. 23±1.5 dBm @ MCS0/8 20 MHz,  
 Typ. 18±1.5 dBm @ MCS7/15 20 MHz  
 Typ. 23±1.5 dBm @ MCS0/8 40 MHz,  
 Typ. 17±1.5 dBm @ MCS7/15 40 MHz  
 802.11a:  
 Typ. 23±1.5 dBm @ 6 to 24 Mbps, Typ. 21±1.5 dBm @ 36 Mbps  
 Typ. 20±1.5 dBm @ 48 Mbps, Typ. 18±1.5 dBm @ 54 Mbps  
 802.11n (5 GHz):  
 Typ. 23±1.5 dBm @ MCS0/8 20 MHz,  
 Typ. 18±1.5 dBm @ MCS7/15 20 MHz  
 Typ. 23±1.5 dBm @ MCS0/8 40 MHz,  
 Typ. 18±1.5 dBm @ MCS7/15 40 MHz

Note: Based on regional regulations, the maximum transmission power allowed on the UNII bands is restricted in the firmware, as indicated below:

|                 | US     | EU     | JP     |
|-----------------|--------|--------|--------|
| 2.4 GHz         | 20 dBm | 20 dBm | 20 dBm |
| 5 GHz (UNII-1)  | 17 dBm | 20 dBm | 20 dBm |
| 5 GHz (UNII-2)  | 20 dBm | 20 dBm | 20 dBm |
| 5 GHz (UNII-2e) | 20 dBm | 20 dBm | 20 dBm |
| 5 GHz (UNII-3)  | 20 dBm | 20 dBm | 20 dBm |

**Receiver Sensitivity:**

802.11b:  
 -93 dBm @ 1 Mbps, -93 dBm @ 2 Mbps  
 -93 dBm @ 5.5 Mbps, -88 dBm @ 11 Mbps  
 802.11g:  
 -88 dBm @ 6 Mbps, -86 dBm @ 9 Mbps  
 -85 dBm @ 12 Mbps, -85 dBm @ 18 Mbps  
 -85 dBm @ 24 Mbps, -82 dBm @ 36 Mbps  
 -78 dBm @ 48 Mbps, -74 dBm @ 54 Mbps  
 802.11n (2.4 GHz):  
 -70 dBm @ MCS7 20 MHz, -69 dBm @ MCS15 20 MHz  
 -67 dBm @ MCS7 40 MHz, -67 dBm @ MCS15 40 MHz  
 802.11a:  
 -90 dBm @ 6 Mbps, -88 dBm @ 9 Mbps  
 -88 dBm @ 12 Mbps, -85 dBm @ 18 Mbps  
 -81 dBm @ 24 Mbps, -78 dBm @ 36 Mbps  
 -74 dBm @ 48 Mbps, -72 dBm @ 54 Mbps  
 802.11n (5 GHz):  
 -69 dBm @ MCS7 20 MHz, -71 dBm @ MCS15 20 MHz  
 -63 dBm @ MCS7 40 MHz, -68 dBm @ MCS15 40 MHz

**Protocol Support**

**General Protocols:** Proxy ARP, DNS, HTTP, HTTPS, IP, ICMP, SNMP, TCP, UDP, RADIUS, SNMP, DHCP, VLAN, STP/RSTP

**Interface**

**Default Antennas:** 2 dual-band omni-directional antennas, 2 dBi, RP-SMA (male)  
**Connector for External Antennas:** RP-SMA (female), 500 V insulation  
**LAN Ports:** 1, RJ45, 10/100/1000BaseT(X) auto negotiation speed, F/H duplex mode, and auto MDI/MDI-X connection  
**Console Port:** RS-232 (RJ45-type)  
**Reset:** Present  
**LED Indicators:** PWR1, PWR2, PoE, FAULT, STATE, SIGNAL\*, WLAN, LAN  
 \*signal strength indicator  
**Alarm Contact (digital output):** 1 relay output with current carrying capacity of 1 A @ 24 VDC  
**Digital Inputs:** 2 electrically isolated inputs  
 • +13 to +30 V for state “1”  
 • +3 to -30 V for state “0”  
 • Max. input current: 8 mA

**Management**

**Device Management:** Wireless Search Utility, MXconfig, SNMP  
**Network Monitoring:** MXview

**Physical Characteristics**

**Housing:** Metal, IP30 protection  
**Weight:** 860 g (1.9 lb)  
**Dimensions:** 52.7 x 135 x 105 mm (2.08 x 5.32 x 4.13 in)  
**Installation:** DIN-rail mounting (standard), wall mounting (optional)

**Environmental Limits**

**Operating Temperature:**  
 Standard Models: -25 to 60°C (-13 to 140°F)  
 Wide Temp. Models: -40 to 75°C (-40 to 167°F)  
**Storage Temperature:** -40 to 85°C (-40 to 185°F)  
**Ambient Relative Humidity:** 5% to 95% (non-condensing)

**Power Requirements**

**Input Voltage:** 12 to 48 VDC, redundant dual DC power inputs or 48 VDC Power-over-Ethernet Plus (IEEE 802.3af compliant)  
**Input Current:** 0.6 A @ 12 VDC; 0.15 A @ 48 VDC  
**Connector:** 10-pin removable terminal block, 500 V insulation  
**Power Consumption:** 7.2 W  
**Reverse Polarity Protection:** Present

**Standards and Certifications**

**Safety:** UL 60950-1, EN 60950-1  
**Hazardous Location:** UL/cUL Class I Division 2, ATEX Zone 2  
**EMC:** EN 61000-6-2/6-4  
**EMI:** CISPR 22, FCC Part 15B Class B  
**EMS:**  
 IEC 61000-4-2 ESD: Contact: 8 kV; Air: 15 kV  
 IEC 61000-4-3 RS: 80 MHz to 1 GHz: 10 V/m  
 IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV  
 IEC 61000-4-5 Surge: Power: 2 kV; Signal: 2 kV  
 IEC 61000-4-6 CS: 10 V  
 IEC 61000-4-8  
**Radio:** EN 301 489-1/17, EN 300 328, EN 301 893, TELEC, FCC ID SLE-WAPN008, KC, RCM  
 Note: Please check Moxa's website for the most up-to-date certification status.

**MTBF** (mean time between failures)


**Time:** 770,854 hrs  
**Standard:** Telcordia SR332

**Warranty**

**Warranty Period:** 5 years  
**Details:** See www.moxa.com/warranty

## Dimensions

Unit: mm (inch)

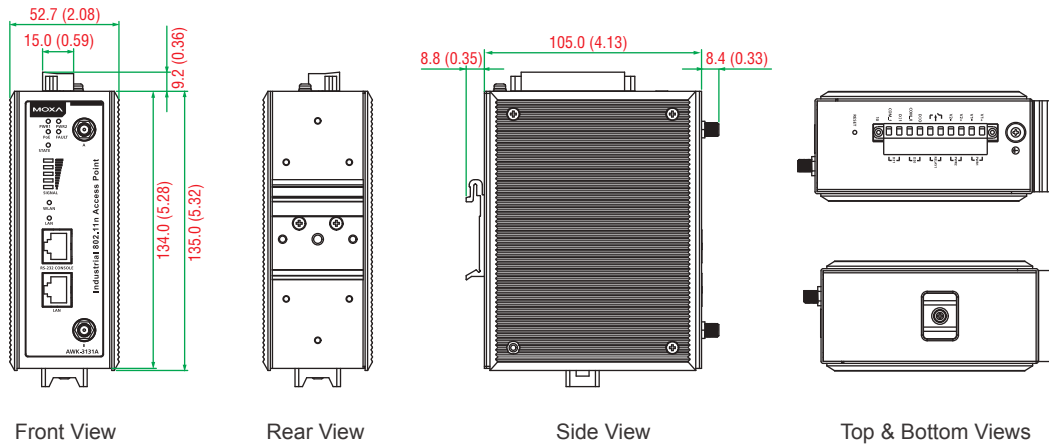

## Ordering Information

### Available Models

- AWK-3131A-US:** IEEE 802.11a/b/g/n wireless AP/bridge/client, US band, -25 to 60°C operating temperature
  - AWK-3131A-US-T:** IEEE 802.11a/b/g/n wireless AP/bridge/client, US band, -40 to 75°C operating temperature
  - AWK-3131A-EU:** IEEE 802.11a/b/g/n wireless AP/bridge/client, EU band, -25 to 60°C operating temperature
  - AWK-3131A-EU-T:** IEEE 802.11a/b/g/n wireless AP/bridge/client, EU band, -40 to 75°C operating temperature
  - AWK-3131A-JP:** IEEE 802.11a/b/g/n wireless AP/bridge/client, JP band, -25 to 60°C operating temperature
  - AWK-3131A-JP-T:** IEEE 802.11a/b/g/n wireless AP/bridge/client, JP band, -40 to 75°C operating temperature
- Note: Please visit Moxa's website for a complete list of optional wireless accessories and antennas available for Moxa's wireless products.

### Package Checklist

- AWK-3131A wireless AP/bridge/client
- 2 2.4/5 GHz antennas: ANT-WDB-ARM-02
- DIN-rail kit
- 2 plastic RJ45 protective caps
- Cable holder with one screw
- Quick installation guide (printed)
- Warranty card

Vertrieb durch 

**AMC – Analytik & Messtechnik GmbH Chemnitz**

Heinrich-Lorenz-Str. 55 Tel.: +49/371/38388-0  
 09120 Chemnitz Fax: +49/371/38388-99  
 E-Mail: info@amc-systeme.de Web: www.amc-systeme.de