


CP-102E/EL

2-port RS-232 PCI Express boards



- > PCI Express x1 compliant
- > 921.6 Kbps maximum baudrate for super fast data transmission
- > 128-byte FIFO and on-chip H/W, S/W flow control
- > Low profile form factor fits small-sized PCs
- > Drivers provided for Windows 7 x86/x64, XP/2003/Vista/2008 x86/x64, 2000, Linux 2.4, Linux 2.6 (x86/x64) QNX 6, Windows XP Embedded, SCO OpenServer 5/6, UnixWare 7
- > 15 KV ESD protection on the board

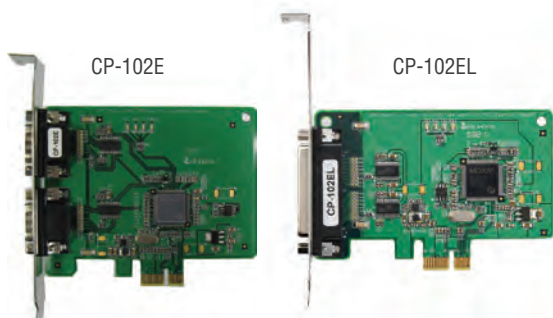

Vertrieb durch **AMC**
AMC – Analytik & Messtechnik GmbH Chemnitz
 Heinrich-Lorenz-Str. 55 Tel.: +49/371/38388-0
 09120 Chemnitz Fax: +49/371/38388-99
 E-Mail: info@amc-systeme.de Web: www.amc-systeme.de

10
Multiport Serial Boards > CP-102E/EL

Overview

The CP-102E and low profile CP-102EL are 2-port PCI Express boards designed for POS and ATM applications. Moxa's PCI Express boards are a top choice of industrial automation engineers and system integrators, particularly since the boards support many different operating systems, including Windows and Linux. The CP-102E/EL's

2 RS-232 serial ports support a super fast 921.6 Kbps baudrate, and provide full modem control signals to ensure compatibility with a wide range of serial peripherals. In addition, the boards' x1 classification allows them to be installed in any PCI Express slot.

Smaller Form Factor

The CP-102EL is a low profile board that is compatible with any PCI Express slot. The CP-102EL board only requires a 3.3 VDC power

supply, which means that the board fits any host computer, ranging from shoebox to standard-sized PCs.

Drivers Provided for Windows, Linux

Moxa continues to support a wide variety of operating systems, and the CP-102E/EL boards are no exception. Reliable Windows COM and Linux TTY drivers are provided for all Moxa boards, and other

operating systems, such as WEPOS, are also supported for embedded integration applications.

Specifications

Hardware

Comm. Controller: 16C550C compatible

Bus: PCI Express x1

Connectors:

CP-102E: DB9 male

CP-102EL: DB25 female

Serial Interface

Number of Ports: 2

Serial Standards: RS-232

Max. No. of Boards per PC: 4

Serial Line Protection

ESD Protection: 15 KV on the board

Performance

Baudrate: 50 bps to 921.6 Kbps

Serial Communication Parameters

Data Bits: 5, 6, 7, 8

Stop Bits: 1, 1.5, 2

Parity: None, Even, Odd, Space, Mark

Flow Control: RTS/CTS, XON/XOFF

Serial Signals

RS-232: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND

Driver Support

Operating Systems: Windows 2000, Windows XP/2003/Vista/2008/7 x86/x64, Linux 2.4, Linux 2.6 x86/x64, QNX 6, Windows XP Embedded, DOS, SCO OpenServer 5/6, UnixWare 7

Note: Please refer to Moxa's website for the latest driver support information.

Physical Characteristics

Dimensions:

CP-102E: 85.04 x 100 mm (3.40 x 4.00 in)

CP-102EL: 67.21 x 101.97 mm (2.69 x 4.08 in)

Environmental Limits

Operating Temperature: 0 to 55°C (32 to 131°F)

Operating Humidity: 5 to 95% RH

Storage Temperature: -20 to 85°C (-4 to 185°F)

Regulatory Approvals

FCC: Part 15 Class B

EMS: EN55022, EN55024, EN61000-3-2, EN61000-3-3, IEC 61000-4-2, IEC 61000-4-3, IEC 61000-4-4, IEC 61000-4-5, IEC 61000-4-6, IEC 61000-4-8, IEC 61000-4-11

Power Requirements

Power Consumption:

CP-102E: 520 mA @ 3.3 V

CP-102EL: 552 mA @ 3.3 V


Warranty

Warranty Period: 5 years


Details: See www.moxa.com/warranty

Dimensions

CP-102E

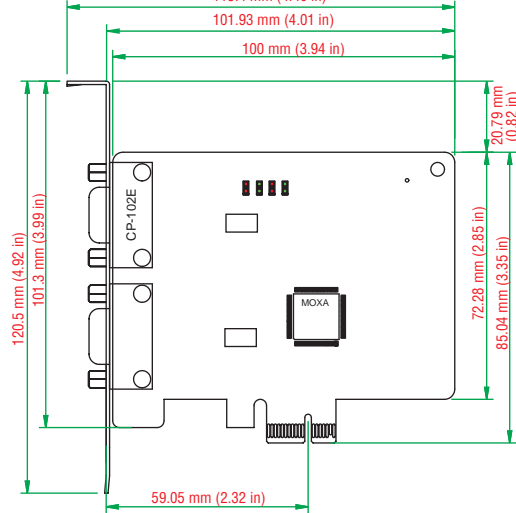

CP-102EL

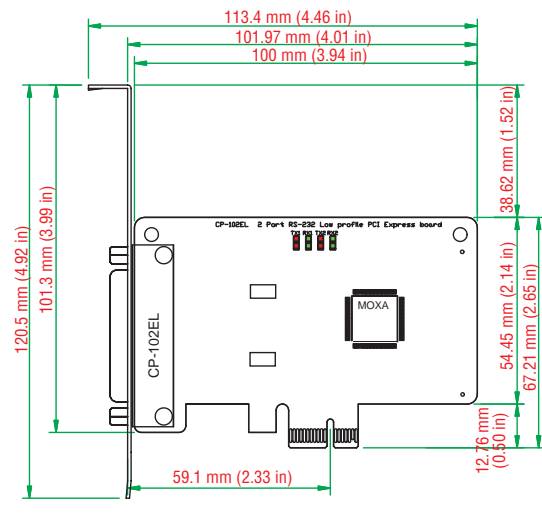

: Ordering Information

Available Models

CP-102E: 2-port RS-232 PCI Express x1 serial board

CP-102EL-DB9M: 2-port RS-232 low profile PCI Express serial board (includes DB9 male cable)

Package Checklist

- CP-102E or CP-102EL board
- Low profile bracket (CP-102EL only)
- Document and Software CD
- Quick Installation Guide (printed)
- Warranty Card

Connection Options (CP-102EL only, can be purchased separately)

CBL-M25M9x2-50

DB25 male to DB9 male x 2
(50 cm cable)



PIN	RS-232
1	DCD
2	RxD
3	TxD
4	DTR
5	GND
6	DSR
7	RTS
8	CTS

DB9 male

