


Vertrieb durch **AMC**
AMC – Analytik & Messtechnik GmbH Chemnitz
 Heinrich-Lorenz-Str. 55 Tel.: +49/371/38388-0
 09120 Chemnitz Fax: +49/371/38388-99
 E-Mail: info@amc-systeme.de Web: www.amc-systeme.de

CP-102U/UL

2-port RS-232 Universal PCI serial boards

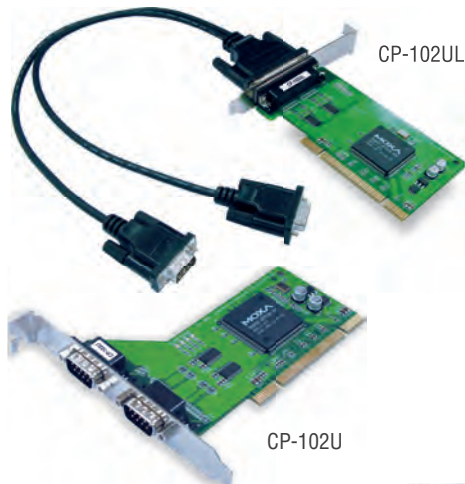

- > Over 800 Kbps data throughput for top performance
- > 921.6 Kbps maximum baudrate for super fast data transmission
- > 128-byte FIFO and on-chip H/W, S/W flow control
- > Compatible with 3.3/5V PCI and PCI-X
- > Drivers provided for Windows 7 x86/x64, XP/2003/Vista/2008 x86/x64, 2000, 9X/ME/NT, Windows CE 5.0/6.0, Windows XP Embedded, DOS, Linux 2.4, Linux 2.6 (x86/x64), FreeBSD 4/5, QNX 6, SCO Open Server 5/6, and UnixWare 7
- > 15 KV ESD protection on the board
- > The CP-102UL's MD1 low profile form factor fits small-sized PCs
- > Wide temperature model available for -40 to 85°C environments



: Overview

The CP-102U and CP-102UL are 2-port Universal PCI boards designed for POS and ATM applications. They are a top choice of industrial automation engineers and system integrators, and support many different operating systems, including Windows, Linux, and even Unix. In addition, each of the boards' RS-232 serial ports supports a super

fast 921.6 Kbps baudrate. The CP-102U and CP-102UL provide full modem control signals to ensure compatibility with a wide range of serial peripherals, and they work with both 3.3V and 5V PCI buses, allowing the boards to be installed in virtually any available PC server.

: Designed for Standard and Small-sized PCs

The CP-102UL is a low profile board that only requires a 5 VDC power supply. It is compatible with both a 3.3V and 5V PCI bus, which means

that the CP-102UL fits any host computer, ranging from shoebox to standard-sized PCs.

: Top Serial Performance

With 20-plus years of experience in serial board design, Moxa is now concentrating on a new high performance serial data transmission chip. The Turbo Serial Engine™ chip provides serial boards with a 128-

byte FIFO, on-chip hardware and software flow control, and burst data mode. Thanks to the Turbo Serial Engine™, Moxa is able to offer the world's best performing smart serial boards.

: Drivers Provided for Windows, Linux, and Unix

Moxa continues to support a wide variety of operating systems, and the CP-102U/UL boards are no exception. Reliable Windows COM and Linux/Unix TTY drivers are provided for all Moxa boards, and other

operating systems, such as WEPOS, are also supported for embedded integration.

: Specifications

Hardware

Comm. Controller: MU860 (16C550C compatible)

Bus: 32-bit Universal PCI

Connectors:

CP-102U: DB9 male x 2

CP-102UL: DB25 female

Serial Interface

Number of Ports: 2 (only one IRQ required)

Serial Standards: RS-232

Max. No. of Boards per PC: 4

Serial Line Protection

ESD Protection: 15 KV on the board

Performance

Baudrate: 50 bps to 921.6 Kbps

Serial Communication Parameters

Data Bits: 5, 6, 7, 8

Stop Bits: 1, 1.5, 2

Parity: None, Even, Odd, Space, Mark

Flow Control: RTS/CTS, XON/XOFF

I/O Address: Assigned by BIOS

IRQ: Assigned by BIOS

Serial Signals

RS-232: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND

Driver Support

Operating Systems: Windows 9X/ME/NT/2000, Windows XP/2003/Vista/2008/7 x86/x64, Windows CE 5.0/6.0, Windows XP Embedded, DOS, Linux 2.4, Linux 2.6 x86/x64, FreeBSD 4/5, QNX 6, SCO Open Server 5/6, UnixWare 7

Note: Please refer to Moxa's website for the latest driver support information.

Physical Characteristics

Dimensions:

CP-102U: 120 x 120 mm (3.15 x 4.72 in)

CP-102UL: 64.5 x 120 mm (2.53 x 4.72 in)

Environmental Limits

Operating Temperature:

Standard Models: 0 to 55°C (32 to 131°F)

Wide Temp. Models: -40 to 85°C (-40 to 185°F)

Operating Humidity: 5 to 95% RH

Storage Temperature: -40 to 85°C (-40 to 185°F)

Regulatory Approvals

FCC: Part 15 Class B

EMS: EN55022, EN55024, EN61000-3-2, EN61000-3-3, IEC 61000-4-2, IEC 61000-4-3, IEC 61000-4-4, IEC 61000-4-5, IEC 61000-4-6, IEC 61000-4-8, IEC 61000-4-11 (DIPS)

Power Requirements

Power Consumption: 93 mA @ +5 V


Warranty

Warranty Period: 5 years


Details: See www.moxa.com/warranty

Dimensions

CP-102U

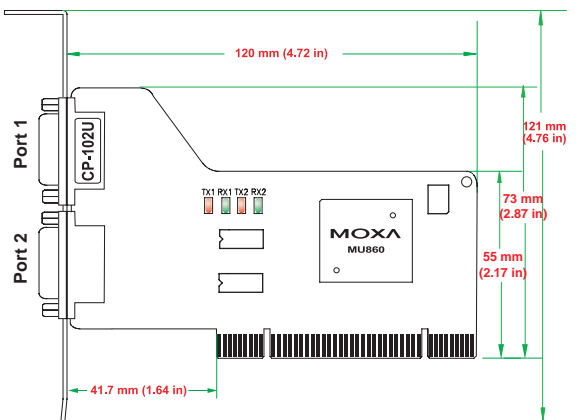

CP-102UL

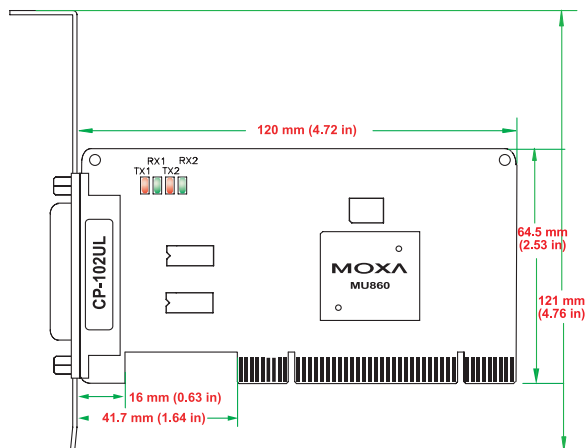

Ordering Information

Available Models

CP-102U: 2-port RS-232 Universal PCI serial board, 0 to 55°C operating temperature

CP-102UL-DB9M: 2-port RS-232 low profile Universal PCI serial board, 0 to 55°C operating temperature (includes DB9 male cable)

CP-102U-T: 2-port RS-232 Universal PCI serial board, -40 to 85°C operating temperature

CP-102UL-T: 2-port RS-232 low profile Universal PCI serial board, -40 to 85°C operating temperature

Package Checklist

- CP-102U or CP-102UL board
- Document and Software CD
- Low profile bracket (CP-102UL only)
- Quick Installation Guide (printed)
- Warranty Card

Connection Options (can be purchased separately)

CBL-M25M9x2-50

DB25 male to DB9 male x 2 (50 cm cable)



PIN	RS-232
1	DCD
2	RxD
3	TxD
4	DTR
5	GND
6	DSR
7	RTS
8	CTS

DB9 male

