PCI-1735U
PCI-1737U
PCI-1739U

64-ch Digital I/O and Counter Universal PCI Card

24-ch Digital I/O Universal PCI Card

48-ch Digital I/O Universal PCI Card

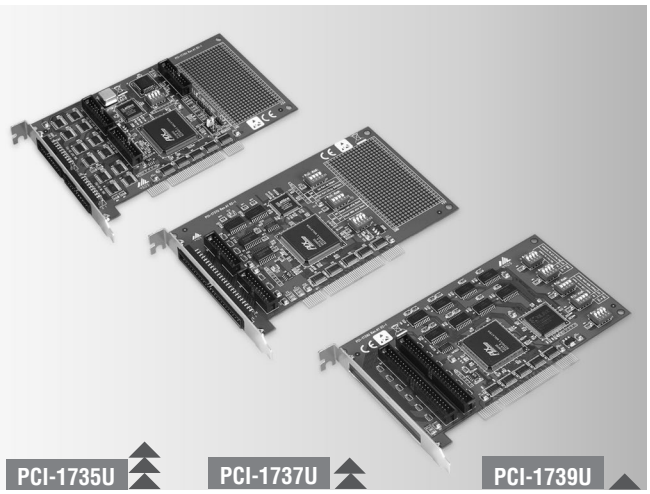

Features

- ISA-Compatible with PCL-720+ (PCI-1735U), PCL-724 (PCI-1737U) and PCL-731 (PCI-1739U)
- TTL-level digital input and output compatibility
- Emulates mode 0 of 8255 PPI (PCI-1737U and PCI-1739U)
- Interrupt handling capability (PCI-1737U and PCI-1739U)
- Output status readback (PCI-1737U and PCI-1739U)
- 3 programmable counter/timer channels and User configurable clock source (PCI-1735U)
- Breadboard area for custom circuits (PCI-1735U and PCI-1739U)
- PCI universal card

FCC CE RoHS

ADVANTECH iAutomation Premier Partner

Specifications

Digital Input

- **Channels** PCI-1735U: 32
  PCI-1737U: 24 (shared with output)
  PCI-1739U: 48 (shared with output)
- **Compatibility** 5 V/TTL
- **Input Voltage** PCI-1735: Logic 0: 0.8V max.
  Logic 1: 2.0V min.
  PCI-1737U/1739U: Logic 0: 0.4V max.
  Logic 1: 2.4V min.
- **Interrupt Capable Ch.** PCI-1737U: 1
  PCI-1739U: 2

Digital Output

- **Channels** PCI-1735U: 32
  PCI-1737U: 24 (shared with input)
  PCI-1739U: 48 (shared with input)
- **Compatibility** 5 V/TTL
- **Output Voltage** PCI-1735U: Logic 0: 0.5 V max.
  Logic 1: 2.4 V min.
  PCI-1737U/1739U: Logic 0: 0.4 V max.
  Logic 1: 2.4 V min.
- **Output Capability** PCI-1735U: Sink: 0.5 V @ 24 mA
  Source: 2.4 V @ 15 mA
  PCI-1737U/1739U: Sink: 0.4 V @ 24 mA
  Source: 2.4 V @ 15 mA

Counter/Timer (PCI-1735U)

- **Channels** 3
- **Resolution** 16 bits
- **Compatibility** 5 V/TTL
- **Max. Input Frequency** 1 MHz
- **Re. Clock Internal** Selectable 1 MHz, 100 kHz, or 10 kHz base clock
- **Ext. Clock Frequency** Jumper selectable divider: x2, x1, x0.5, and x0.25
- **Prog.Counter Modes** 6

General

- **Bus Type** Universal PCI V2.2
- **I/O Connectors** PCI-1735U: 5 x 20-pin box header
  PCI-1737U: 2 x 20-pin & 1 x 50-pin box header
  PCI-1739U: 2 x 50-pin box header
- **Dimensions (L x H)** 175 x 100 mm (6.9" x 3.9")
- **Power Consumption** PCI-1735U: 5V @365 mA (max.)
  PCI-1737U: 5V @300 mA (max.)
  PCI-1739U: 5V @720 mA (max.)
- **Operating Temperature** 0 ~ 65°C (32 ~ 149°F)
- **Storage Temperature** -25 ~ 80°C (-13 ~ 176°F)
- **Storage Humidity** 5 ~ 95% RH, non-condensing

Ordering Information

- **PCI-1735U** 64-ch Digital I/O and Counter Card
- **PCI-1737U** 24-ch Digital I/O Universal PCI Card
- **PCI-1739U** 48-ch Digital I/O Universal PCI Card

Accessories

- **PCL-10120-1E** IDC-20 Flat Cable, 1 m
- **PCL-10120-2E** IDC-20 Flat Cable, 2 m
- **PCL-10150-1.2E** 50-pin Flat Cable, 1.2 m
- **ADAM-3920** 20-Pin Flat Cable Terminal, DIN-rail Mount
- **ADAM-3950** 50-pin DIN-rail Flat Cable Wiring Board

Vertrieb durch AMC

AMC – Analytik & Messtechnik GmbH Chemnitz

Heinrich-Lorenz-Str. 55 Tel.: +49/371/38388-0
09120 Chemnitz Fax: +49/371/38388-99
E-Mail: info@amc-systeme.de Web: www.amc-systeme.de

Irrtum und Änderungen vorbehalten - auch ohne vorherige Ankündigung. Verwendete Hardware- und Softwarebezeichnungen, Marken sowie Firmennamen können eingetragene Warenzeichen sein und unterliegen somit den gesetztlichen Bestimmungen. / Information in this document is subject to change without prior practice. The software and hardware designations or brand names used in this text are in most cases trademarks of their respective companies and are thus subject to law.