


# PCI-1784U

## 4-ch, 32-bit Encoder Counter Universal PCI Card with 8-ch Isolated Digital I/O

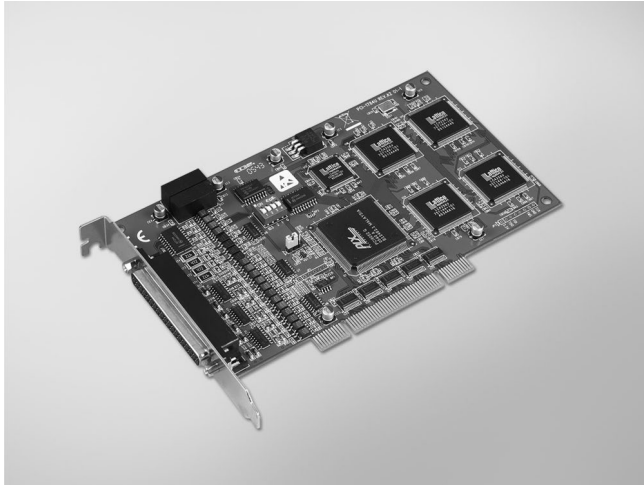

### Features

- Four 32-bit encoder counters
- Single-ended or differential inputs
- Quadrature (x1, x2, x4), pulse/direction, and up/down counting modes
- Optically isolated up to 2,500 VDC
- 4-stage digital filter with selectable sampling rate
- On-board 8-bit timer with wide range time-base selector
- Multiple interrupt sources for precision applications
- 4 isolated digital inputs and 4 isolated digital outputs
- BoardIDTM switch

Vertrieb durch



**AMC – Analytik & Messtechnik GmbH Chemnitz**

Heinrich-Lorenz-Str. 55 Tel.: +49/371/38388-0  
09120 Chemnitz Fax: +49/371/38388-99  
E-Mail: info@amc-systeme.de Web: www.amc-systeme.de

### Introduction

PCI-1784U is a 4-ch encoder counter universal PCI card. It includes four 32-bit encoder counters, 8-bit timer with multiple range time-base selector, 4 isolated digital inputs, and 4 isolated digital outputs. Its flexible interrupt sources are suitable for motor control and position monitoring.

### Specifications

#### Encoder Counter

- **Channels** 4
- **Resolution** 32 bits
- **Counting Modes** Quadrature, pulse/direction, or up/down
- **Max. Input Frequency** 8 MHz for pulse/direction and up/down modes  
2 MHz for quadrature mode without digital filter  
1 MHz for quadrature mode with digital filter
- **Digital Filter** 4 stages
- **Isolation** 2,500 V<sub>DC</sub>
- **Sample Clock Frequency** 8, 4, 2, or 1 MHz
- **Interrupt Sources** Overflow, underflow, index status, counter over compare, counter under compare
- **Input Voltage** Single-ended:  
Logic 0: 0.8 V max.  
Logic 1: 2.8 V min. (12 V max.)  
Differential:  
Logic 0: -0.2 V max. (-12 V min.)  
Logic 1: 0.2 V min. (12 V max.)

#### Isolated Digital input

- **Channels** 4
- **Input Voltage** Logic 0: 3 V max  
Logic 1: 10 V min. (30 V max.)
- **Interrupt Capable** All 4 channels
- **Isolation** 2,500 V<sub>DC</sub>
- **Opto-Isolator Response** 100 μs
- **Overvoltage Protection** 70 V<sub>DC</sub>

#### Isolated Digital Output

- **Channels** 4
- **Output Voltage** Logic 0: 0.8 V max.  
Logic 1: 2.0 V min.
- **Output Capability** 50 mA @ 0.8 V  
-50 mA @ 2.0 V
- **Isolation** 2,500 V<sub>DC</sub>
- **Opto-Isolator Response** 2 μs

#### General

- **Bus Type** Universal PCI V2.2
- **Connector** 37-pin D-sub female
- **Dimension (L x H)** 175 x 100 mm<sup>2</sup> (6.9" x 3.9")
- **Power Consumption** Typical: +5 V @ 200 mA  
Max.: +5 V @ 450 mA
- **Operating Temperature** 0 ~ 60°C (32 ~ 140°F)
- **Storage Temperature** -20 ~ 70°C (-4 ~ 158°F)
- **Storage Humidity** 5 ~ 95% RH, non-condensing (refer to IEC 68-2-3)
- **Certification** CE

### Ordering Information

- **PCI-1784U** 4-ch encoder counter universal PCI card
- **PCL-10137H-3E** High-speed DB37 cable, 3 m
- **ADAM-3937** DB37 DIN-rail wiring board

Irrtum und Änderungen vorbehalten – auch ohne vorherige Ankündigung. Verwendete Hardware- und Softwarebezeichnungen, Marken sowie Firmennamen können eingetragene Warenzeichen sein und unterliegen somit den gesetzlichen Bestimmungen. / Information in this document is subject to change without prior notice. The software and hardware designations or brand names used in this text are in most cases trademarks or registered trademarks of their respective companies and are thus subject to law.