PCIE-1824/L

16-bit ,32/16-ch Analog Output PCI Express Card

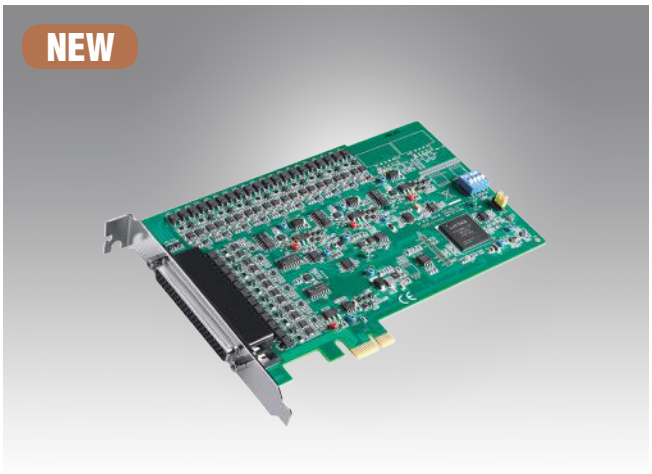

FCC CE RoHS

Features

- 32/16 high-density analog output channels
- Flexible Output Range: ±10 V, 0 ~ 20 mA and 4 ~ 20 mA
- Synchronized output function
- Keep output values when hot system reset
- High ESD protection (2,000 V_{DC})
- Board ID switch

Vertrieb durch AMC

AMC – Analytik & Messtechnik GmbH Chemnitz

Heinrich-Lorenz-Str. 55 Tel.: +49/371/38388-0
09120 Chemnitz Fax: +49/371/38388-99
E-Mail: info@amc-systeme.de Web: www.amc-systeme.de

Introduction

PCIE-1824 is a high-density multiple channel analog card for the PCIE bus, where each analog output channel is equipped with a 16-bit DAC. It features optional voltages, current output and a Board ID switch. PCIE-1824 is an ideal solution for industrial applications where multiple analog output channels are required.

Specifications

Analog Output

- **Channels** 32/16
- **Resolution** 16 bits
- **Output configuration** Single-ended
- **Output range** ±10 V, 0 ~ 20 mA, 4 ~ 20 mA (sink)
- **Voltage output error** Offset < ±1 mV, Gain < ±0.01 %*
- **Current output error** Offset < ±2.5 μA , Gain < ±0.05 %
- **Voltage output Load** >1 kΩ
- **Current output external power** < 30 V
- **Voltage output noise** 0.2 mV_{RMS}
- **Slew rate** 0.7 V/μs
- **Settling time** 100 μs (to ±0.01% of FSR)
- **Auto-calibration** Yes

General

- **I/O Connector type** 1 x DB62 female connector
- **Dimensions** 167 x 100 mm (6.6" x 3.9")
- **Power consumption** Typical: 3.3V @350mA, 12V @350mA
  Max: 3.3V@ 370mA, 12V @ 1000mA
- **Operating temperature** 0 ~ 60°C (32 ~ 140°F)
- **Storage temperature** -40 ~ 70°C (-40 ~ 158°F)
- **Storage humidity** 5 ~ 95% RH (non-condensing)
- **Certifications** CE/FCC

Ordering Information

- **PCIE-1824-AE** 16-bit ,32-ch Analog Output PCI Express Card
- **PCIE-1824L-AE (by request)** 16-bit ,16-ch Analog Output PCI Express Card

Accessories

- **PCL-10162-1E** DB62 Shielded Cable, 1 m
- **PCL-10162-3E** DB62 Shielded Cable, 3 m
- **ADAM-3962-AE** DB62 DIN-rail Wiring Board

* This number is measured at load resistance larger than 1 MΩ. For smaller load resistance, the measured voltage may be reduced due to the voltage divider formed by the conductor resistance of the cable, the wiring board, and the load resistance, which as a result may exceed the error specification. See the user's manual for more detailed explanation.

Irrtum und Änderungen vorbehalten – auch ohne vorherige Ankündigung. Verwendete Hardware- und Softwarebezeichnungen, Marken sowie Firmennamen können eingetragene Warenzeichen sein und unterliegen somit den gesetzlichen Bestimmungen. / Information in this document is subject to change without prior notice. The software and hardware designations or brand names used in this text are in most cases trademarks or registered trademarks of their respective companies and are thus subject to law.