

EDS-308 Series

8-port unmanaged Ethernet switches

Vertrieb durch



AMC – Analytik & Messtechnik GmbH Chemnitz

Heinrich-Lorenz-Str. 55 Tel.: +49/371/38388-0
09120 Chemnitz Fax: +49/371/38388-99
E-Mail: info@amc-systeme.de Web: www.amc-systeme.de

Features and Benefits

- Relay output warning for power failure and port break alarm
- Broadcast storm protection
- -40 to 75°C wide operating temperature range (-T models)

Certifications



Introduction

The EDS-308 Ethernet switches provide an economical solution for your industrial Ethernet connections. These 8-port switches come with a built-in relay warning function that alerts network engineers when power failures or port breaks occur. In addition, the switches are designed for harsh industrial environments, such as the hazardous locations defined by the Class 1 Div. 2 and ATEX Zone 2 standards.

The switches comply with FCC, UL, and CE standards and support either a standard operating temperature range of -10 to 60°C or a wide operating temperature range of -40 to 75°C. All switches in the series undergo a 100% burn-in test to ensure that they fulfill the special needs of industrial automation control applications. The EDS-308 switches can be installed easily on a DIN rail or in a distribution box.

Specifications

Input/Output Interface

Alarm Contact Channels	1 relay output with current carrying capacity of 1 A @ 24 VDC
Ethernet Interface	
10/100BaseT(X) Ports (RJ45 connector)	EDS-308/308-T: 8 EDS-308-M-SC/308-M-SC-T/308-S-SC/308-S-SC-T/308-S-SC-80: 7 EDS-308-MM-SC/308-MM-SC-T/308-MM-ST/308-MM-ST-T/308-SS-SC/308-SS-SC-T/308-SS-SC-80: 6 All models support: Auto negotiation speed Full/Half duplex mode Auto MDI/MDI-X connection
100BaseFX Ports (multi-mode SC connector)	EDS-308-M-SC: 1 EDS-308-M-SC-T: 1 EDS-308-MM-SC: 2 EDS-308-MM-SC-T: 2
100BaseFX Ports (multi-mode ST connector)	EDS-308-MM-ST: 2 EDS-308-MM-ST-T: 2
100BaseFX Ports (single-mode SC connector)	EDS-308-S-SC: 1 EDS-308-S-SC-T: 1 EDS-308-SS-SC: 2 EDS-308-SS-SC-T: 2
100BaseFX Ports (single-mode SC connector, 80 km)	EDS-308-S-SC-80: 1 EDS-308-SS-SC-80: 2

Standards	IEEE 802.3 for 10BaseT IEEE 802.3u for 100BaseT(X) and 100BaseFX IEEE 802.3x for flow control					
Optical Fiber			100BaseFX			
			Multi-Mode		Single-Mode (40 km)	Single-Mode (80 km)
	Fiber Cable Type		OM1	50/125 μm	G.652	G.652
				800 MHz x km		
	Typical Distance		4 km	5 km	40 km	80 km
	Wavelength	Typical (nm)	1300		1310	1550
		TX Range (nm)	1260 to 1360		1280 to 1340	1530 to 1570
		RX Range (nm)	1100 to 1600		1100 to 1600	1100 to 1600
	Optical Power	TX Range (dBm)	-10 to -20		0 to -5	0 to -5
		RX Range (dBm)	-3 to -32		-3 to -34	-3 to -34
		Link Budget (dB)	12		29	29
		Dispersion Penalty (dB)	3		1	1
	Note: When connecting a single-mode fiber transceiver, we recommend using an attenuator to prevent damage caused by excessive optical power. Note: Compute the “typical distance” of a specific fiber transceiver as follows: Link budget (dB) > dispersion penalty (dB) + total link loss (dB).					

DIP Switch Configuration

Ethernet Interface	Port break alarm
--------------------	------------------

Switch Properties

MAC Table Size	2 kbits
Packet Buffer Size	768 K
Processing Type	Store and Forward

Power Parameters

Input Current	EDS-308/308-T: 0.07 A @ 24 VDC EDS-308-M-SC: 0.11 A @ 24 VDC EDS-308-S-SC/308-S-SC-80: 0.12 A @ 24 VDC EDS-308-MM-SC/MM-ST/SS-SC/308-SS-SC-80: 0.15 A @ 24 VDC
Connection	1 removable 6-contact terminal block(s)
Operating Voltage	9.6 to 60 VDC
Input Voltage	Redundant dual inputs 12/24/48 VDC
Reverse Polarity Protection	Supported
Overload Current Protection	Supported

Physical Characteristics

Housing	Metal
IP Rating	IP30
Dimensions	53.6 x 135 x 105 mm (2.11 x 5.31 x 4.13 in)
Weight	790 g (1.75 lb)
Installation	DIN-rail mounting Wall mounting (with optional kit)

Environmental Limits

Operating Temperature	Standard Models: -10 to 60°C (14 to 140°F) Wide Temp. Models: -40 to 75°C (-40 to 167°F)
Storage Temperature (package included)	-40 to 85°C (-40 to 185°F)
Ambient Relative Humidity	5 to 95% (non-condensing)

Standards and Certifications

Safety	UL 508 UL 60950-1 CSA C22.2 No. 60950-1 EN 62368 (LVD)
EMC	EN 55032/35
EMI	CISPR 32, FCC Part 15B Class A
EMS	IEC 61000-4-2 ESD: Contact: 6 kV; Air: 8 kV IEC 61000-4-3 RS: 80 MHz to 1 MHz: 20 V/m IEC 61000-4-4 EFT: Power: 2 kV; Signal: 1 kV IEC 61000-4-5 Surge: Power: 2 kV; Signal: 2 kV IEC 61000-4-6 CS: 10 V
Hazardous Locations	ATEX Class I Division 2
Vibration	IEC 60068-2-6
Shock	IEC 60068-2-27
Freefall	IEC 60068-2-32
Maritime	DNV

MTBF

Time	EDS-308/308-T: 2,972,907 hrs EDS-308-M-SC/308-M-SC-T/308-S-SC/308-S-SC-T/308-S-SC-80: 2,646,710 hrs EDS-308-MM-SC/308-MM-SC-T/308-MM-ST/308-MM-ST-T/308-SS-SC/308-SS-SC-T/308-SS-SC-80: 2,382,553 hrs
Standards	MIL-HDBK-217F

Warranty


Warranty Period	5 years
Details	See www.moxa.com/warranty

Package Contents

Device	1 x EDS-308 Series switch
Installation Kit	1 x cap, plastic, for SC fiber port 2 x cap, plastic, for SC fiber port (-SC models) 2 x cap, plastic, for ST fiber port (-ST models)
Documentation	1 x quick installation guide 1 x warranty card

Dimensions

Unit: mm (inch)

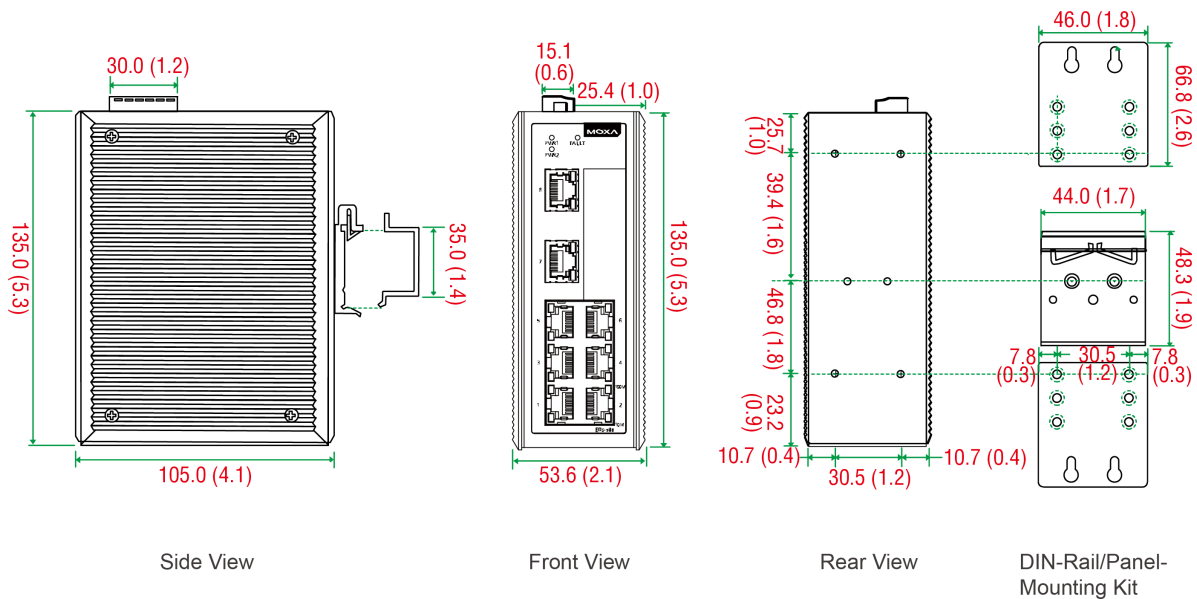

Ordering Information

Model Name	10/100BaseT(X) Ports RJ45 Connector	100BaseFX Ports Multi-Mode, SC Connector	100BaseFX Ports Multi-Mode, ST Connector	100BaseFX Ports Single-Mode, SC Connector	Operating Temp.
EDS-308	8	–	–	–	-10 to 60°C
EDS-308-T	8	–	–	–	-40 to 75°C
EDS-308-M-SC	7	1	–	–	-10 to 60°C
EDS-308-M-SC-T	7	1	–	–	-40 to 75°C
EDS-308-MM-SC	6	2	–	–	-10 to 60°C
EDS-308-MM-SC-T	6	2	–	–	-40 to 75°C
EDS-308-MM-ST	6	–	2	–	-10 to 60°C
EDS-308-MM-ST-T	6	–	2	–	-40 to 75°C
EDS-308-S-SC	7	–	–	1	-10 to 60°C
EDS-308-S-SC-T	7	–	–	1	-40 to 75°C
EDS-308-SS-SC	6	–	–	2	-10 to 60°C
EDS-308-SS-SC-T	6	–	–	2	-40 to 75°C
EDS-308-S-SC-80	7	–	–	1	-10 to 60°C
EDS-308-SS-SC-80	6	–	–	2	-10 to 60°C

Vertrieb durch



AMC – Analytik & Messtechnik GmbH Chemnitz

Heinrich-Lorenz-Str. 55 Tel.: +49/371/38388-0
09120 Chemnitz Fax: +49/371/38388-99
E-Mail: info@amc-systeme.de Web: www.amc-systeme.de

Accessories (sold separately)

Power Supplies

DR-120-24	120W/2.5A DIN-rail 24 VDC power supply with universal 88 to 132 VAC or 176 to 264 VAC input by switch, or 248 to 370 VDC input, -10 to 60°C operating temperature
DR-4524	45W/2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 50° C operating temperature
DR-75-24	75W/3.2A DIN-rail 24 VDC power supply with universal 85 to 264 VAC or 120 to 370 VDC input, -10 to 60°C operating temperature
MDR-40-24	DIN-rail 24 VDC power supply with 40W/1.7A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature
MDR-60-24	DIN-rail 24 VDC power supply with 60W/2.5A, 85 to 264 VAC, or 120 to 370 VDC input, -20 to 70°C operating temperature

Rack-Mounting Kits

RK-4U	19-inch rack-mounting kit
-------	---------------------------

Wall-Mounting Kits

WK-46	Wall-mounting kit, 2 plates, 8 screws, 46.5 x 66.8 x 1 mm
-------	---

© Moxa Inc. All rights reserved. Updated Oct 17, 2023.

This document and any portion thereof may not be reproduced or used in any manner whatsoever without the express written permission of Moxa Inc. Product specifications subject to change without notice. Visit our website for the most up-to-date product information.

