

EKI-7710E-2C EKI-7710E-2CI

8FE+2G Port Gigabit Managed Redundant Industrial Switch



Features

- 8 Fast Ethernet ports + 2 Gigabit Copper/SFP combo ports
- SFP socket for easy and flexible fiber expansion
- Redundancy: X-Ring Pro (ultra high-speed recovery time < 20 ms), RSTP/STP (802.1w/1D)
- IXM function enables fast deployment
- Security: 802.1x (Port-Based, MD5/TLS/TTLS/PEAP Encryption), RADIUS
- Management: SNMP v1/v2c/v3, WEB, Telnet, Standard MIB, Private MIB
- -40 ~ 75 °C wide-range operating temperature (EKI-7710E-2CI)
- Dual 12 ~ 48 V_{DC} power input and 1 relay output
- Support Security Pack to against internal and external cyber threats

Introduction

EKI-7710E-2C/2CI supports 8 Fast Ethernet ports and 2 Gigabit combo ports. It is embedded with Advantech's IXM function for fast deployment that can dramatically save engineers time and cost. The EKI-7710E series also support NMS to help IT managers with networking maintenance and failure prevention. Finally, the EKI-7710E series is equipped with X-Ring Pro which can achieve ultra high-speed recovery times of less than 20 ms to ensure network stability.

Specifications

Interface

- **I/O Port** 8 x 10/100Base-T/TX RJ-45
2 x RJ-45/SFP (mini-GBIC) Combo port
- **Console port** RS-232 (RJ45)
- **Power Connector** 6-pin screw Terminal Block (including relay)

Physical

- **Enclosure** Metal Shell
- **Protection Class** IP 30
- **Installation** DIN-Rail
- **Dimensions (W x H x D)** 74 x 152 x 105 mm (2.91" x 5.98" x 4.13")

LED Display

- **System LED** PWR1, PWR2, SYS, Alarm and R.M.
- **Port LED** Link / Speed / Activity

Environment

- **Operating Temperature** -40 ~ 75 °C (-40 ~ 167 °F) 7710E-2CI
-10 ~ 60 °C (-40 ~ 140 °F) 7710E-2C
- **Storage Temperature** -40 ~ 85 °C
- **Ambient Relative Humidity** 10 ~ 95% (non-condensing)
- **Humidity** 10 ~ 95% (non-condensing)

Power

- **Power Consumption** 12.1W @ 48V_{DC} (System)
- **Power Input** 12 ~ 48 V_{DC}, redundant dual power input
- **Fault Output** 1 Relay Output

Certification

- **EMI** CE, FCC Class A
 - **Safety** UL508
UL60950*, C1D2*
 - **EMC** EN 61000-4-2
EN 61000-4-3
EN 61000-4-4
EN 61000-4-5
EN 61000-4-6
EN 61000-4-8
EN50121-4*
IEC 60068-2-27
 - **Shock** IEC 60068-2-32
 - **Freefall** IEC 60068-2-6
 - **Vibration** IEC 60068-2-6
 - **Traffic control** NEMA TS2*
- *= Compliant


L2 Features

- **L2 MAC Address** 8K
- **Jumbo Frame** 9216 Bytes
- **VLAN Group** 256 (VLAN ID 1 ~ 4094)
- **VLAN Arrange** Port based VLAN, Q-in-Q (VLAN Stacking), GVRP
- **Port Mirroring** Per port, Multi-source port, IGMP Snooping v1/v2/v3, MLD Snooping, IGMP Immediate leave
- **IP Multicast** Broadcast, Multicast, Unknown unicast
- **Storm Control** IEEE 802.1D-STP, IEEE 802.1s-MSTP, IEEE 802.1w-RSTP, X-Ring Pro, with ultra high-speed recovery time less than 20ms
- **Redundancy**

Vertrieb durch 
AMC – Analytik & Messtechnik GmbH Chemnitz
Heinrich-Lorenz-Str. 55 Tel.: +49/371/38388-0
09120 Chemnitz Fax: +49/371/38388-99
E-Mail: info@amc-systeme.de Web: www.amc-systeme.de

Dimensions

Unit: mm [inch]

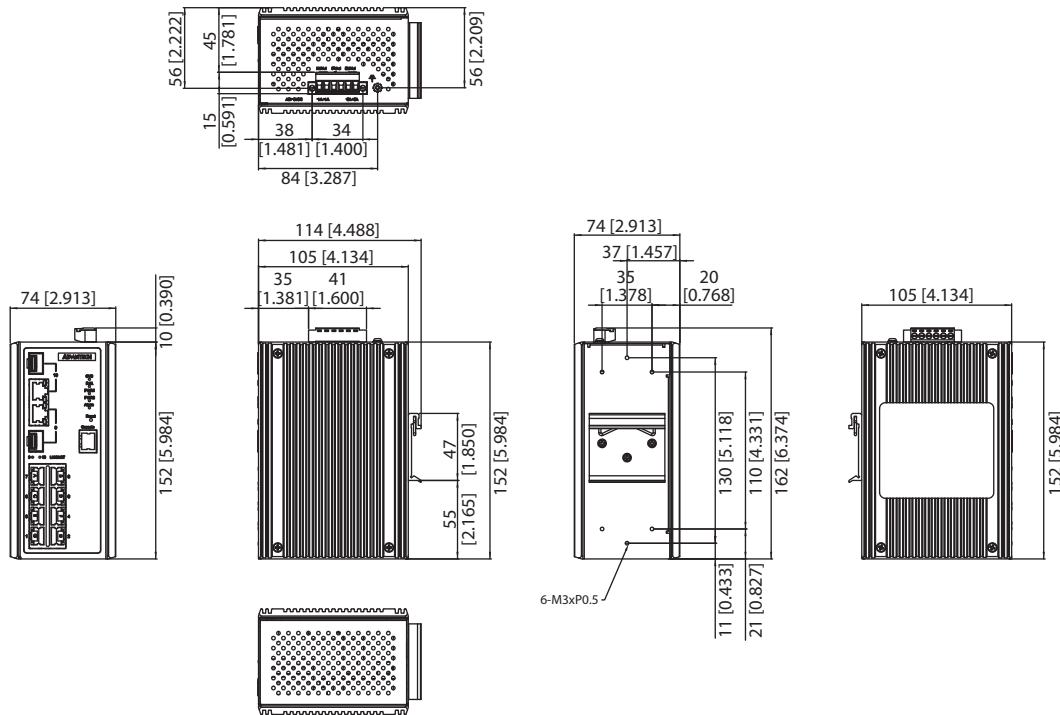

Panel Cut-out Dimensions: 105 (4.137) x 152 (5.984) x 74 (2.91)

QoS

- **Priority Queue** WRR (Weighted Round Robin), SP (Strict Scheduling Priority) Hybrid Priority
- **Scheduling** IEEE 802.1p Based CoS, IP TOS, DSCP based CoS
- **Class of Service** Ingress Rate Limit, Egress Rate Limit
- **Rate Limiting** IEEE 802.3ad Dynamic Port Trunking, Static Port Trunking

Security

- **Port Security** Static, Dynamic IP Source Guard, ARP Spoofing Prevention, Access Control List, DHCP Snooping
- **Authentication** 802.1x (Port-Based, MD5/TLS/TTLS/PEAP Encryption), TACACS+

Management

- **DHCP** Client, Server, Option66/67/82
- **Access** SNMP v1/v2c/v3, WEB, Telnet, RMON, Standard MIB, Private MIB
- **Security access** SSH2.0, SSL
- **Software upgrade** TFTP, HTTP, Dual Image
- **NTP** SNTP client

Ordering Information

- **EKI-7710E-2CI-AE** 8FE + 2G Combo Port Managed Ethernet Switch w/ Wide Temp
- **EKI-7710E-2C-AE** 8FE + 2G Combo Port Managed Ethernet Switch

Vertrieb durch



AMC – Analytik & Messtechnik GmbH Chemnitz

Heinrich-Lorenz-Str. 55 Tel.: +49/371/38388-0
 09120 Chemnitz Fax: +49/371/38388-99
 E-Mail: info@amc-systeme.de Web: www.amc-systeme.de