


ASMB-787

LGA 1200 Intel® Xeon® W & 10th Gen. Core™ ATX Server Board with 4 x DDR4, 5 x PCIe, 2 x PCI, 4 x USB 3.2, 5 x SATA 3, Quad/Dual LANs, and IPMI

NEW

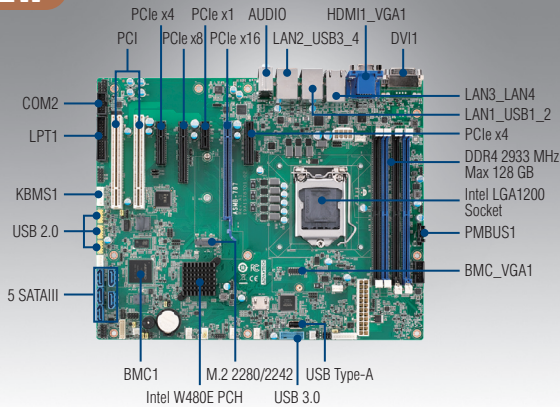

Features

- LGA 1200 Intel® Xeon® W & 10th Gen. Core™ i9/i7/i5/i3 processors with W480E chipset
- DDR4 2933/2666/2400 MHz ECC/Non-ECC UDIMM up to 128 GB
- One PCIe x16 link (or two x8 link), two PCIe x4, and one PCIe x1 slots
- Triple displays - DVI-D, VGA, and HDMI 2.0 ports
- Five SATA 3 ports and four x USB 3.2 ports
- One M.2 2280/2242 (SATA / PCIe compatible)
- Rackmount optimized placement with positive air flow design
- 0 ~ 60 °C (32 ~ 140 °F) ambient operating temperature range

Note: Supported OS including Windows 10 (64-bit) and Server 2019 (64-bit) have been validated.

CE FCC

Vertrieb durch



AMC – Analytik & Messtechnik GmbH Chemnitz

Heinrich-Lorenz-Str. 55 Tel.: +49/371/38388-0
 09120 Chemnitz Fax: +49/371/38388-99
 E-Mail: info@amc-systeme.de Web: www.amc-systeme.de

Specifications

Form Factor	ATX form factor						
Processor System	Socket Intel® LGA 1200 CPU type Intel® Xeon® W-1270x/W-1290x and 10th Generation Core™ i3/i5/i7/i9 series (TDP up to 125W)						
Core Logic	Chipset Intel W480E chipset						
Memory	Total slots	4 x (Dual Channel)					
	Max. capacity	128 GB					
	Memory type	DDR4 ECC/Non-ECC 2933/2666/2400 MHz UDIMM (288-pin)*					
	Memory size	4 GB, 8 GB, 16 GB, 32GB					
Expansion Slots	Total PCI/PCIe slots	7					
	Slot location 1	PCI slot					
	Slot location 2	PCI slot					
	Slot location 3	PCIe x4 slot (Gen3 x4 link)					
	Slot location 4	PCIe x8 slot (Gen3 x8 link)					
	Slot location 5	PCIe x1					
	Slot location 6	PCIe x16 slot (Gen3 x8 or x16 link)					
Graphics	Controller	Intel® HD Graphics**					
	VRAM	1 GB maximum shared memory with 2 GB and above system memory installed					
Storage	SATA controller	Intel® W480E: 8 SATA 3 6 Gb/s ports with Intel Rapid Storage Technology support (for Windows only) (Supports software RAID 0, 1, 10 & 5)					
	SAS controller	-					
Networking	Interface	10/100/1000 Mbps					
	Controller	GbE LAN1: Intel® I219; GbE LAN 2-4: Intel I210-AT					
	Connector	RJ-45 x 2 for G2 version; RJ-45 x 4 for G4 version					
Onboard I/O Connector	Printer Port connector	1					
	PSU connector	24-pin SSI power connector + 8-pin SSI 12V power connector					
	USB connector	1 x USB 3.2 Gen 1 (2 ports), 3 x USB 2.0 (6 ports), 1 x USB Type-A					
	M.2 connector	1 x M.2 2280/2242 (PCIe/SATA)					
	Fan header	5 x (4-pin)					
	SMBus	1					
	Chassis intruder	1					
	Front LAN LED	2					
	Serial port header	2 x (RS-232)					
	Audio connector	1 x (ALC 892)					
	PS/2 KB/Mouse	1 x (Optional PS/2 KB/Mouse cable and bracket required)					
Rear I/O Connector	External serial port	- (via COM cable in the package)					
	External USB port	4 x (USB 3.2 Gen 2)					
	VGA port	1 x (Resolution up to 1920 x 1200 @ 60 Hz)					
	DVI port	1 x (Resolution up to 1920 x 1200 @ 60 Hz)					
	HDMI port	1 x (Resolution up to 4096 x 2160 @ 60 Hz)					
	RJ-45	2 x for G2 version; 4 for G4 version					
	Audio connector	2 x (Mic-in, Line-out)					
	PS/2 KB/Mouse	-					
Watchdog Timer	Output	System reset					
	Interval	Programmable 1 ~ 255 sec					
Power Requirement	Power On	3.3 V	5 V	12 V	12V_8P	5 V _{SB}	-12 V
	(Xeon W-1290E 3.5GHz DDR4 2666 32G*4)	1.69A	1.68A	0.31A	9.25A	0.1A	0.01A
	Operating	Non-operating					
	Temperature	0 ~ 60° C, depends on CPU speed and cooler solution			-40 ~ 85° C		
Environment	Humidity	0% ~ 95%			5% ~ 95% (Non condensing)		
	Dimensions	304.8 x 244 mm (12 x 9.6 in)					


* ECC will not be supported when paired with Core i5/i7/i9 processors.

** Some Xeon processors have no graphic support. Please check Intel specification for processor graphics availability.



ADVANTECH Automation
Premier Partner

Block Diagram

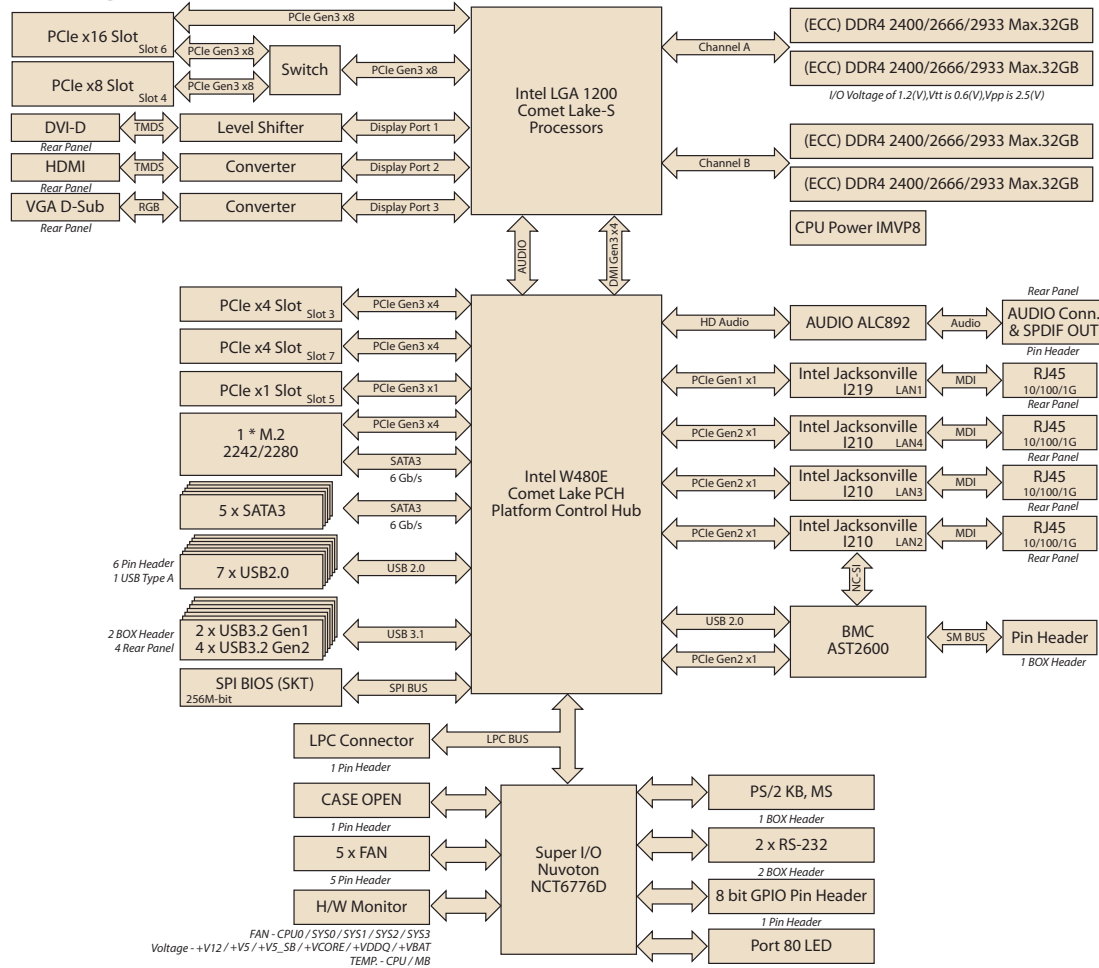

Ordering Information

Part Number	Chipset	Memory	Display	LAN	SATAIII	IPMI
ASMB-787G2-00A1	W480E	DDR4 Non-ECC/ECC UDIMM	VGA + DVI-D + HDMI	2	5	-
ASMB-787G4-00A1 (Available in Q2/2021)	W480E	DDR4 Non-ECC/ECC UDIMM	VGA + DVI-D + HDMI	4	5	Y

Packing List

Part Number	Description	Quantity
2041B78700	Startup manual	x 1
1700003194	SATA data cables	x 1
1700019381	SATA data cable (right angle)	x 1
1700022749-11	SATA power cables	x 2
1700001788	COM1 cable	x 1
1960088021T001	I/O shield	x 1
1700031684-01	JFP1 cable	x 1

I/O View



ASMB-787G4-00A1



ASMB-787G2-00A1

Optional Accessories

Part Number	Description
1700029038-01	BMC VGA cable with bracket (35 cm / 13.7 in, for G4 SKU)

Note: If you need BMC KVM function, please select this cable.

Part Number	Description
1960049408N001	LGA 1200 CPU heatsink for 1U chassis
1960067860N001	LGA 1200 CPU cooler for 2U/4U chassis (CPU 125W)
1960052651N021	LGA 1200 CPU cooler for 2U/4U chassis (CPU under 95W)
1960088060T001	1U I/O shield for ASMB-586/587/786/787
1700008809	Printer port cable kit (25 cm / 9.84 in)
1700020294-01	Printer port cable kit (42 cm / 16.5 in)
1701090401	Single port RS-232 cable with bracket (40 cm / 15.7 in)
1700022204	Dual port USB 2.0 cable (27 cm / 10.6 in) with bracket
1700008461	Four port USB 2.0 cable (30.5 cm / 12 in) with bracket
1700020277-01	Dual port USB 3.0 cable with bracket (30 cm / 11.8 in)
1700019268-11	Cable for onboard KBMS1 connector (35 cm / 13.7 in)
1960063434N000	Cable bracket for 1700019268-11 (4U)
PCA-COM232-00A1E	4 ports RS-232 module to LPC connector
PCA-COM485-00A1E	4 ports RS-485 module to LPC connector
PCA-TPM-00B1E	TPM 2.0 Module by LPC

Note: Users need to purchase ASMB-787's proprietary CPU cooler from Advantech Other brands' CPU coolers may NOT be compatible with ASMB-787.