IPC-5122

Desktop/Wallmount Chassis for MicroATX Motherboard



Features

- Shockproof drive bay for slim ODD and 3.5" or 2.5" HDD
- Lockable front door prevents unauthorized access
- LED indicators for system fault detection
- · Easy-to-maintain system fan and reusable air filter
- Built-in Intelligent System Module enabling whole system fan control and remote manageability
- Low noise PWM controlled

Vertrieb durch



AMC - Analytik & Messtechnik GmbH Chemnitz

 Heinrich-Lorenz-Str. 55
 Tel.: +49/371/38388-0

 09120 Chemnitz
 Fax: +49/371/38388-99

 E-Mail: info@amc-systeme.de
 Web: www.amc-systeme.de

Quiet **Specifications**

C € FCC

		External	Internal		
Drive Bay	Slim Optical Drive	1	-		
	3.5"	1	1		
Cooling	Fan	1 (12 cm / 82 CFM)			
Cooling	Air Filter	Yes			
Front I/O Interface	USB 2.0	2 (Front accessible)			
	LED Indicators	Power, HDD, fan and temperature			
Miscellaneous	Control	Power switch, alarm reset and system reset buttons			
	Rear Panel	Six 9-pin D-Sub openings			
Intelligent System Module		an speed , CPU/System temperature (Only Advantech AIMB-78X, PCE-51XX/71XX mainboards can enable CPU fan speed and temperature			
Hardware Monitoring	monitoring function of Intelligent System Module)				
		Operating	Non-Operating		
	Temperature	0 ~ 40 °C (32 ~ 104 °F)	-20 ~ 60 °C (-4 ~ 140 °F)		
Environment	Humidity	10 ~ 85% @ 40 °C, non-condensing	10 ~ 95% @ 40 °C, non-condensing		
	Vibration (5 ~ 500 Hz)	1 Grms	2 G		
	Shock	10 G (with 11 ms duration, half sine wave)			
Physical Characteristics	Dimensions (W x H x D)	157 x 360 x 340 mm (6.2" x 14.2" x 13.4")			
Filysical Gilaracteristics	Weight	6.5 kg (14.3 lb)			

Front View

LED Alarm

USB Port

Slim ODD Bay

IPC-DT-3120E

Inside View



Rear View



Note: Hot swap drive bay module and Slim ODD should be bought separately.



Easy-open door





Gently press the hook to pull the air filter out





Alarm Reset

Power Switch

System Reset



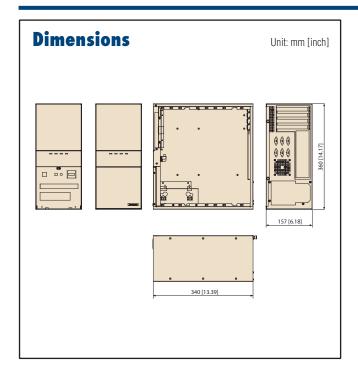



Ordering Information

Part Number	Description
IPC-5122-00B	Without power supply, with ATX switch

Optional Accessories

Part Number	Description	
IPC-DT-3120E	Mobile rack for converting a 3.5" drive bay to dual 2.5" SATA HDD trays	

Power Supply Options

(For detailed power supply specs, please refer to Chapter 13)

Part number	80 Plus Grade	Wattage	Туре	Input
PS8-300ATX-ZBE	Bronze	300W	Single	90 ~ 264 V _{AC}
PS8-500ATX-RR	Bronze	500W	Single	90 ~ 264 V ₄₀

