


MIO-5354

Intel® Atom™ x7835RE, x7433RE, x7211RE; Core™ i3-N305; Processor N97 on 3.5" SBC

NEW

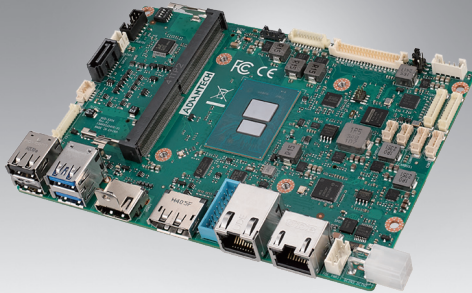

Features

- Intel® Atom™ x7835RE, x7433RE, x7211RE, support Extend Temp.
- DDR5-4800 up to 16GB, support IBECC by Platform
- 3 independent display: LVDS + HDMI + DP
- 2x LAN, 6x USB, 4x COM, 2x CAN-FD, SMBus/I²C, DC-in 12-24V
- Expansion: M.2 E-Key 2230, M.2 B-Key 2280 & M.2 B-Key 3052
- Supports EdgeBMC (for OOB control) & Software APIs, DeviceOn

Software APIs:



Utilities:



Windows Ubuntu DeviceOn EdgeBMC CE FCC

Specifications

Platform	Processor	x7835RE		x7433RE	x7211RE	i3-N305	N97		
	Max. Frequency	3.60 GHz		3.40 GHz	3.20 GHz	3.80 GHz	3.60 GHz		
	Base Frequency	1.30 GHz		1.50 GHz	1.00 GHz	1.80 GHz	2.00 GHz		
	Core	8		4	2	8	4		
	LLC	6MB		6MB	6MB	6MB	6MB		
	CPU TDP	12W		9W	6W	15W	12W		
	Chipset	Intel 300 Series Chipset (SoC Integrated)							
Memory	BIOS	AMI UEFI 256Mbit							
	Technology	DDR5 4800 MT/s							
	Max. Capacity	Up to 16GB							
	Channel/Socket	Single Channel / One 262pin SODIMM Slot							
Graphics	ECC Support	Support IBECC by Platform							
	Controller	Intel® UHD Graphics							
	Max. Frequency	1.20 GHz		1.00 GHz		1.00 GHz		1.25 GHz	1.20 GHz
	Execution Unit	32		32		16		32	24
	3D/HW Acceleration	DX12, OGL4.0, OCL1.2, HW Encode: HEVC/H265, AVC/H264, VP9, HW Decode: HEVC/H265, AVC/H264, VP9							
Display I/F	LCD	1 x LVDS, Dual Channel 18/24-bit, up to 1920 x 1080							
	HDMI/DP	1 x HDMI 2.0, up to 4096 x 2160 x 24bpp@48-60Hz 1 x DP1.4a, up to 4096 x 2304 x 36bpp@60Hz							
	Triple Display	3 simultaneous displays by LVDS + HDMI + DP							
Ethernet	Controller	LAN1: i226; LAN2: i210							
	Speed	LAN1: 2.5GbE; LAN2: GbE							
	Feature	LAN1: Optional Support PoE, PSE compliant to IEEE 802.3at (30W with power module: MIOe-PSE) LAN2: Support EdgeBMC, Out of Band remote control							
External I/O	Ethernet	2 x RJ-45							
	VGA/HDMI/DP	-/1/1							
Internal I/O	USB3.2/USB2.0	2/2							
	SATA	1 x SATA GenIII 6.0Gbps							
	USB3.0	2							
	Serial Bus	1 x I²C (*BOM option to SMBus by request)							
	COM Port	2 x RS-232/422/485, 2 x RS-232							
	CAN Bus	2 x CAN-FD, 2M/4M/8M bit/s or CAN 2.0, 1M bit/s							
	GPIO	8-bit general purpose input output I/O							
	Audio	Realtek ALC888s, Line-in/Line-out/MIC							
	Inverter	5V @2A							
	Smart Fan	12V, 2A (4-wire)							
Board Feature	Front Panel Control	Power-on, Reset, Buzzer, SATA LED, Power LED, Case Open							
	Watchdog Timer	65536 level, 0-65535 sec							
	TPM	Discrete TPM2.0							
Expansion	iManager 3.0	SW API for Hardware Monitor, Smart Fan Control, Brightness Control, I²C, GPIO, WDT							
	M.2 E-Key	1 x E-Key 2230 (PCIe x1, USB2.0)							
	M.2 B-Key	1 x B-Key 2280 (SATA or PCIe x1) 1 x B-Key 3052 (USB3.0, USB2.0) w/ Nano-SIM. (*BOM option: USB3.0 to PCIe x1 or PCIe x2. Customized BIOS is required.)							
Power	Supply Voltage	Vin: DC 12V-24V ± 10%; RTC Battery: Lithium 3V/200mAH, support w/o CMOS Battery							
	Connector	ATX 2x2 pin 90D (*BOM option to DC-Jack or ATX 2x2 pin 180D by request)							
	Power Management	AT, ATX							
	Max. Consumption (*Ref. data with Burn-In Test. Please contact FAE for adapter selection.)	19.3W (12V) 20.8W (24V)		15.4W (12V) 17.2W (24V)		11.9W (12V) 14.8W (24V)		22.4W (12V) 23.8W (24V)	18.7W (12V) 20.4W (24V)
	Idle Consumption	12.7W (12V) 15.7W (24V)		10.4W (12V) 14.9W (24V)		10.5W (12V) 14.0W (24V)		11.7W (12V) 14.8W (24V)	10.7W (12V) 14.0W (24V)
Environment	Temperature	Operating: Standard: 0 ~ 60 °C (32 ~ 140 °F) with 0.7m/s airflow; Extend: -40 ~ 85 °C (-40 ~ 185 °F) with 0.7m/s airflow Storage: -40 ~ 85 °C (-40 ~ 185 °F)							
	Humidity	Operating: 40 °C @ 95% relative humidity, non-condensing Storage: 60 °C @ 95%relative humidity, non-condensing							
	Vibration Resistance	3.5 Grms							
Certification	EMC	CE, FCC Class B, ESD 8KV/15KV Criteria A							
Mechanical	Dimensions	146 x 102 mm (5.7" x 4")							
	Net Weight	145g							

Vertrieb durch



AMC – Analytik & Messtechnik GmbH Chemnitz

Heinrich-Lorenz-Str. 55 Tel.: +49/371/38388-0
09120 Chemnitz Fax: +49/371/38388-9
E-Mail: info@amc-systeme.de Web: www.amc-systeme.de

*Note: Support by request

Vertrieb durch




AMC – Analytik & Messtechnik GmbH Chemnitz

Heinrich-Lorenz-Str. 55 Tel.: +49/371/38388-0
09120 Chemnitz Fax: +49/371/38388-99
E-Mail: info@amc-systeme.de Web: www.amc-systeme.de



Block Diagram

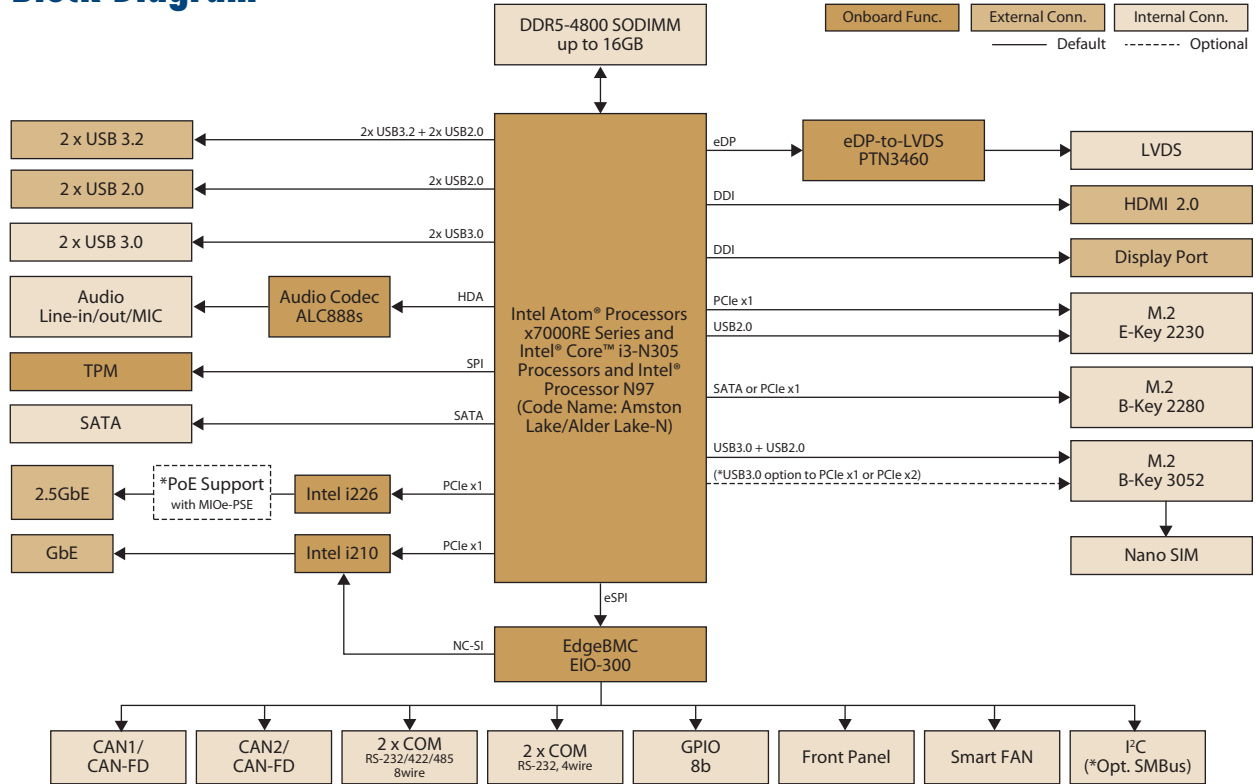

*Optional PoE support on LAN2 requires external power module: MIOe-PSE

Ordering Information

Part No.	CPU	CPU Max. Frequency	Core	TDP	Memory IB ECC	GPU	GPU Max. Frequency	Execution Units	Thermal Solution	Operating Temperature
MIO-5354AW-P6A1	x7835RE	3.60 GHz	8	12W	Yes	Intel® UHD Graphics	1.20 GHz	32	Active	-40 ~ 85 °C
MIO-5354AW-P4A1	x7433RE	3.40 GHz	4	9W	Yes	Intel® UHD Graphics	1.00 GHz	32	Passive	-40 ~ 85 °C
MIO-5354AW-P2A1	x7211RE	3.20 GHz	2	6W	Yes	Intel® UHD Graphics	1.00 GHz	16	Passive	-40 ~ 85 °C
MIO-5354C3-P8A1	i3-N305	3.80 GHz	8	15W	Yes	Intel® UHD Graphics	1.25 GHz	32	Passive	0 ~ 60 °C
MIO-5354N-P6A1	N97	3.60 GHz	4	12W	Yes	Intel® UHD Graphics	1.20 GHz	24	Passive	0 ~ 60 °C


Packing List

Part No.	Description	Quantity
1700006291	MIO-5354 SBC	1
1700031583-01	SATA Cable 30cm	1
1700030404-01	SATA Power Cable 25cm	1
1700030404-01	COM1/COM2 Cable 20cm	2
1700019584-01	Audio Cable 20cm	1
1970005854T001	MIO-5354 CPU Heatsink (Passive Solution)	1
1970005931T001	MIO-5354 CPU Cooler (Active Solution)	1

Optional Accessories

Part No.	Description
1970006081N001	MIO-5354 CPU Heatspreader
1700032181-01	Dual USB 3.0 Cable 35cm
1700031582-01	COM3/COM4 Cable 20cm
MIOe-PSE-SPA1	MIOe-PSE PoE Module A1 Single 30W
MIOe-M2LAN-DPA1	M.2 3052 to Dual 2.5GbE LAN port (0 ~ 80 °C) *Support with option BOM (PCIe x1) and customized BIOS

Rear I/O View



Embedded OS/API

OS/API	Part No.	Description
Windows 11 LTSC	20706WLE1S0037	Win11 IoT Ent. LTSC 2024 64bit (Entry SKU: Atom x7000RE & N97)
	20706WLV1S0037	Win11 IoT Ent. LTSC 2024 64bit (Value SKU: i3-N305)
Ubuntu 24.04 LTS Software API	20706U24DS0011	Website Download
		Ubuntu Desktop 24.04 LTS 64-bit SUSI v4.0