

PPC-3151W

15.6" Fanless Widescreen Panel PC with Intel® Core™ i5-7300U Processor



Features

- 15.6" true-flat Full HD LCD panel with projected capacitive touchscreen, anti-glare coating
- Intel® Core™ i5-7300U(default); i7-7600U/i3-7100U(optional) processor with fanless system design
- Supports PCIe x4 or PCI expansion
- 1 x isolated RS-422/485 with auto flow
- Wide input power range (9 ~ 32 V_{DC})
- Dual Gigabit Ethernet with IEEE1588 support
- 3 x Independent displays
- 1 x M.2 bay (2242) for storage only
- 1 x TPM 2.0 internal support (optional)
- Supports VESA 100 mounting interface

Vertrieb durch



AMC – Analytik & Messtechnik GmbH Chemnitz

Heinrich-Lorenz-Str. 55 Tel.: +49/371/38388-0
 09120 Chemnitz Fax: +49/371/38388-99
 E-Mail: info@amc-systeme.de Web: www.amc-systeme.de

Introduction

PPC-3151W is a new generation industrial interactive panel PC with a 15.6" TFT full HD LCD 1920 x 1080 resolution, which features a flat, sleek design to greatly reduce maintenance effort. Pre-installed Intel® Core™ i processor and designed fanless architecture, PPC-3151W provide high performance and reliable system for factory automation or variety of industrial applications. Furthermore, with the provision of multiple I/O, dual Intel® Gigabit ethernet, PCI/PCIe expansion, PPC-3151W ensures easy integration and connectivity.

Specifications

System	CPU	Intel® Core™ i5-7300U dual core (default); i7-7600U/i3-7100U (optional)
	Frequency	2.6 GHz, up to 3.5 GHz with turbo
	L2 Cache	3 MB
	Memory	1 x SODIMM DDR4 1866/2133 MHz, (max. 16 GB)
	Storage	1 x 2.5" SATA bay 1 x M.2 bay (size: 22 x 42 mm, socket 2 B key, for storage only)
	Network (LAN)	2 x 10/100/1000 Mbps Ethernet (Intel® I211-AT; Intel® I219LM)
	I/O	2 x RS-232, 1 x RS-422/485 with 1K V _{DC} isolation Either 2 x RS-232 or 1 x RS-232 + 1 x GPIO(TTL, 8 pin programmable) on right side (optional module) 4 x USB 3.0 1 x Line-out, 1 x Mic-in 1 x DB15 VGA 1 x Display Port (1.2) 1 x TPM 2.0 internal(optional)
	Expansion	1 x Mini PCIe 1 x PCIe x 4 (default); 1 x PCI (in the accessory box)
	Watchdog Timer	255 timer levels, set up by software
Speaker	2 x 1W	
Physical Characteristics	Dimensions	419.7 x 269 x 59 mm (16.5 x 10.6 x 2.3 in)
	Weight	5.4kg (11.9 lb)
OS Support	OS Support	Microsoft® Windows 10 (64-bit), Win 10 LTSC, Linux
Power Consumption	Input Voltage	9 ~ 32 V _{DC}
	Power Consumption	i5-7300U 65W(Burn-in test 8.1 in Windows 10 64bit)
LCD	Display Type	15.6" TFT LCD (LED backlight)
	Max. Resolution	1920 x 1080
	Viewing Angle	85 (Left), 85 (Right), 85(Up), 85(Down)
	Luminance (cd/m ²)	450
	Contrast Ratio	800
	Backlight Lifetime	50,000 hr (min.)
Touchscreen	Touch Type	Multi-touch projected capacitive
	Light Transmission	88 % ± 2 %
	Controller	USB interface
Environment	Operating Temperature	0 ~ 50 °C (32 ~ 122 °F) with SSD; 0 ~ 40 °C (32 ~ 104 ° F) with HDD
	Storage Temperature	-20 ~ 60 °C (-4 ~ 140 °F)
	Relative Humidity	10 ~ 95% @ 40 °C (Non-Condensing)
	Shock	Operating 10 G Peak Acceleration (11 ms Duration), Follows IEC 60068-2-27
	Vibration	Operating Random Vibration Test 5 ~ 500Hz, 1Grms @with HDD; 2Grms @with SSD, Follows IEC 60068-2-64
	EMC	CE, FCC Class B, BSMI
	Safety	CB, UL, CCC, BSMI
Front Panel Protection	IP65 compliant	

Vertrieb durch




AMC – Analytik & Messtechnik GmbH Chemnitz

Heinrich-Lorenz-Str. 55 Tel.: +49/371/38388-0
 09120 Chemnitz Fax: +49/371/38388-99
 E-Mail: info@amc-systeme.de Web: www.amc-systeme.de

PPC-3151W

Dimensions

Unit: mm

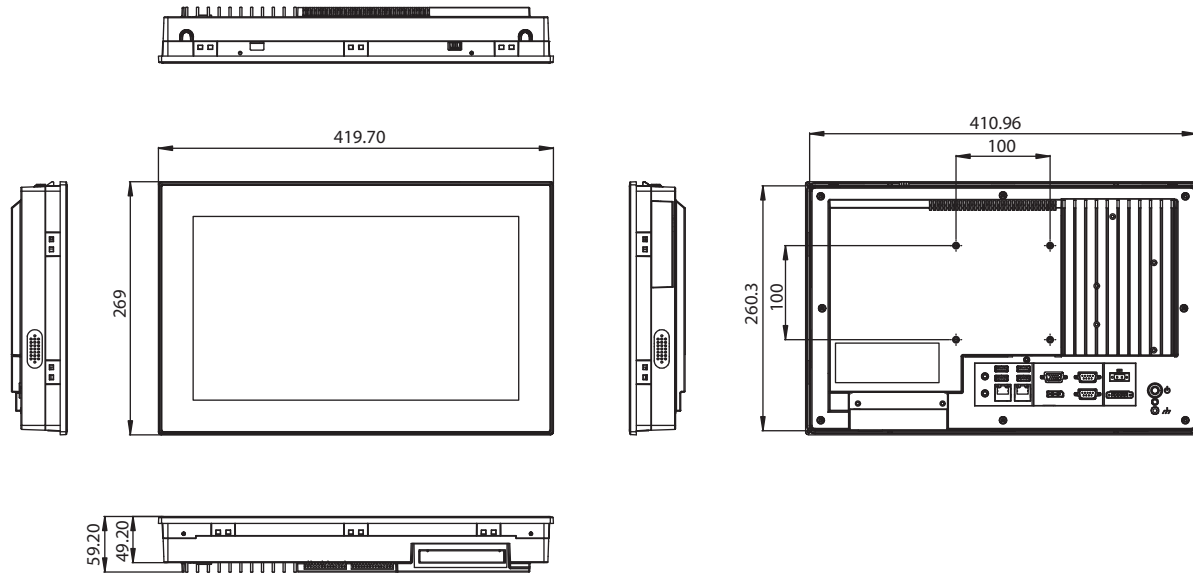


Cut-Out Dimension: 413.00 x 262.00 mm

Ordering Information

Part Number	Description
PPC-3151W-P75A	15.6" Wide screen PPC with PCT Multi-touch, Intel Core i5-7300U, assembled in China
PPC-3151W-P75A0	15.6" Wide screen PPC with PCT Multi-touch, Intel Core i5-7300U, without audio function, assembled in China
PPC-3151W-P75AU	15.6" Wide screen PPC with PCT Multi-touch, Intel Core i5-7300U, assembled in Taiwan
PPC-3151W-P77AU	15.6" Wide screen PPC with PCT Multi-touch, Intel Core i7-7600U, assembled in Taiwan
PPC-3151W-P77AU0	15.6" Wide screen PPC with PCT Multi-touch, Intel Core i7-7600U, without audio function, assembled in Taiwan
96PSA-A90W190T-3	A/D 100-240V 90W 19V C6 TERMINAL 2 PIN 62368
1700001524	POWER Cord 3P UL 10A 125V 180cm
170203183C	POWER Code 3P Europe (WS-010+083)183cm
1700008921	POWER CORD 3P/3P POWER SUPPLY 1.8M PSE
96CB-POWER-B-1.8MB	Power code 3P CCC(China) 1.8M
PPC-174T-WL-MTE	Wall mount kit for PPC series
PPC-STAND-A1E	Stand for PPC series
PPC-ARM-A03	ARM VESA Standard (A-CLEVER) for PPC series
PPC-WLAN-C1E	M.2 Wi-Fi Module with Antenna cable support 2T2R
98R3P321100	Optional module on right side: Either 2 x RS-232 or 1 x RS-232 + 1 x GPIO(TTL, 8 pin programmable)
98R3P321110	TPM 2.0 module

I/O View

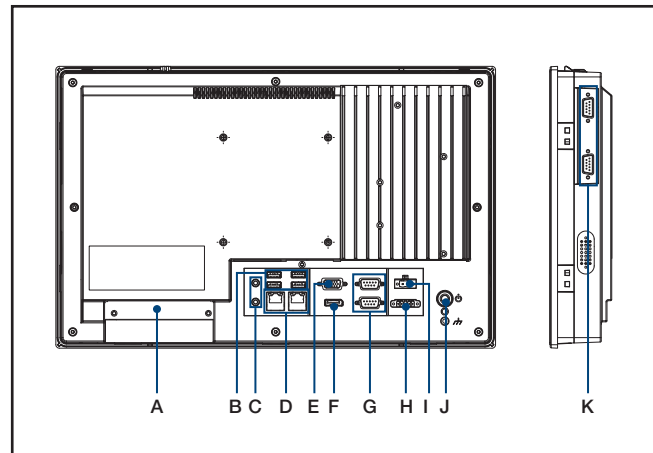

- A. 1 x Expansion slot (PCI or PCIe x1)
- B. 4 x USB3.0
- C. 1 x Mic-In/Line-Out
- D. 2 x Intel Gigabit Ethernet
- E. 1 x VGA
- F. 1 x DisplayPort
- G. 2 x RS-232
- H. 1 x Isolated RS-422/485
- I. 1 x DC inlet and AT/ATX switch
- J. 1 x Power button
- K. 2 x RS-232 (on right side optional)

Please note: If some optional modules are offered with the system, additional system certificates may be required in certain regions/countries. Please contact Advantech for certificate compliance.

Irrtum und Änderungen vorbehalten – auch ohne vorherige Ankündigung. Verwendete Hardware- und Softwarebezeichnungen, Marken sowie Firmennamen können eingetragene Warenzeichen sein und unterliegen somit den gesetzlichen Bestimmungen. / Information in this document is subject to change without prior notice. The software and hardware designations or brand names used in this text are in most cases trademarks or registered trademarks of their respective companies and are thus subject to law.