

# UNO-2271G V3

## Pocket-Size Edge IoT Gateway with Intel® Atom x7211RE



### Features

- Intel® Atom Dual core x7211RE processor with 8GB LPDDR5 onboard memory and 64 GB eMMC
- Pocket-size, robust, fanless and cable-free system with high stability
- Optional second stack for increasing functionality including POE, COM, wireless connectivity or iDoor expansion
- Support Windows 11 LTSC, Ubuntu 22.04; 24.04

Vertrieb durch



**AMC – Analytik & Messtechnik GmbH Chemnitz**

Heinrich-Lorenz-Str. 55 Tel.: +49/371/38388-0  
09120 Chemnitz Fax: +49/371/38388-99  
E-Mail: info@amc-systeme.de Web: www.amc-systeme.de

### Introduction

Advantech's UNO-2000 series of embedded automation computers are highly rugged, fanless systems. The modular design offers strong computing performance and flexible scalability with various I/O ports for IoT Connectivity. UNO-2271G V3 designed as IoT edge gateways, its pocket size design features versatile I/O ports and expansion options to support wire/wireless communication, and AI accelerators for IoT edge data analysis and processing. UNO-2271G V3 IoT edge gateway enables various industrial applications across multiple industries.

### Specifications

#### General

- Certification** CE, FCC, UL, CCC, BSMI
- Dimensions (W x D x H)** 100 x 70 x 41.5 mm/3.9 x 2.8 x 1.63 in
- Form Factor** Pocket size
- Enclosure** Aluminum
- Mount Options** Stand mount, Wall mount, VESA mount(optional), DIN rail mount (optional)
- Weight (Net)** 0.5 kg/1.1 lb
- Power Requirement** 10 ~ 30V<sub>DC</sub>
- Power Consumption** 12W (typical), 40W (max.)
- Power Type** AT mode
- Operating System** Windows 11 LTSC, Ubuntu 22.04; 24.04

#### System Hardware

- BIOS** AMI UEFI x64
- Watchdog Timer** Programmable interval timer, from 1 to 255 seconds
- Processor** Intel® Atom Dual core x7211RE
- Memory** 8 GB LPDDR5 onboard
- Graphics Engine** Intel® UHD Graphics
- Ethernet** 2 x Intel® i226-IT GbE, IEEE 802.3AZ/802.1AS
- LED Indicators** Power, RUN, LAN (active, status)
- Storage** Onboard 64GB eMMC  
Optional 1 x M.2 B+M key 2242 (SATA/PCIe)
- Expansion** 1 x M.2\_B key (w/PCIex1/SATA/USB3.2)
- Hardware Security** TPM2.0 (TPM2.0 Library Revision 1.38)

#### I/O Interfaces


- LAN Ports** 2 x 10/100/1000/2500BASE-T Fast Ethernet (RJ45)
- USB Ports** 1x USB 3.2 Gen2 X1  
1 x USB Type C (1.5A), supports DP & USB, DP ALT mode
- Display Output** 1 x HDMI (1920 x 1080 @60Hz)
- Power Connector** 1 x 2-pin terminal block

#### Environment


- Operating Temperature** -20 ~ 60 °C (-4 ~ 140 °F) with 0.7m/s airflow
- Storage Temperature** -40 ~ 85 °C /-40 ~ 185 °F
- Relative Humidity** Operating , 95% RH @ 40° C, Non-Condensing  
Non-Operating, 95% RH @ 60° C, Non-Condensing
- Shock Protection** Operating, IEC 60068-2-27, 50G, half sine, 11 ms
- Vibration Protection** Operating, IEC 60068-2-64, 2 Grms, random
- Ingress Protection** IP30

### Installation Scenarios





#### Stand/Wall Mount



#### VESA Mount (optional)




#### DIN-Rail Mount at the Rear Side (optional)




## Dimensions


Unit: mm

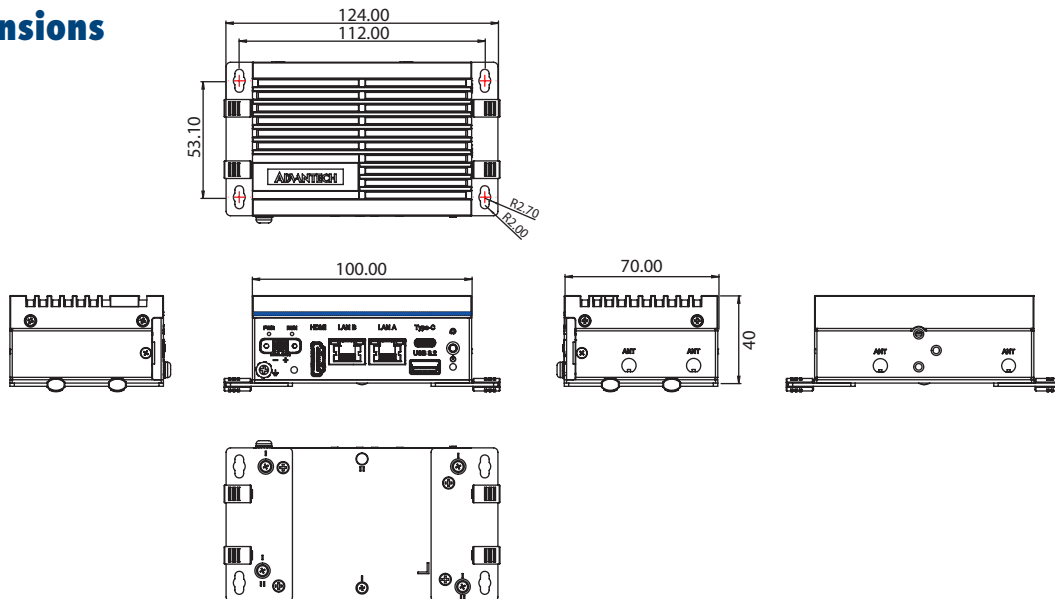

## Front I/O

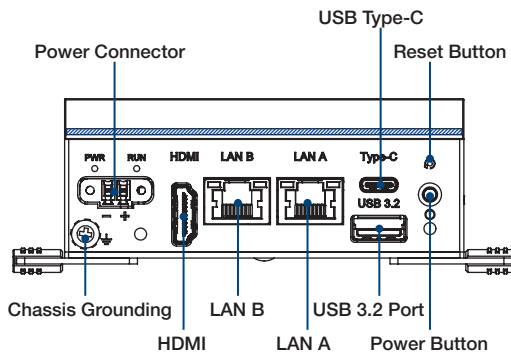

## Side I/O



## Ordering Information

- **UNO-2271G-I331AE** Intel® Atom® x7211RE 8 GB Ram, 64 GB eMMC, 2 x GbE, 1 x USB3.2, 1 x USB Type-C, 1 x HDMI, 1 x M.2 Bkey
- **UNO-2271G-I331AU** Intel® Atom® x7211RE 8 GB Ram, 64 GB eMMC, 2 x GbE, 1 x USB3.2, 1 x USB Type-C, 1 x HDMI, 1 x M.2 Bkey, US Region

## Embedded OS

- **20701WLE1S0015** WIN11 LTSC v7.01 B024 for UNO-2271G\_V3 Entry
- **20701U22DS0002** AdvLinux 22.04
- **TBC** AdvLinux 24.04

## Optional Accessories

### Extension Kits

- **UNO-2271G-EKDE** 2nd stack extension kit for iDoor
- **UNO-2271G-RP1EB** 2nd stack extension kit for POE PD, COM, M.2 B key
- **UNO-2271G-RS2EB** 2nd stack extension kit for 2xCOM, M.2 B+E key

### Adapters and Power Cables

- **96PSA-A60W24T2-3** 60W AC to DC UNO series power adapter
- **1702002600** Power cable (US) 1.8 M
- **1702002605** Power cable (EU) 1.8 M
- **1702031801-11** Power cable (UK) 1.8 M
- **1700000596-11** Power cable (China/Australia) 1.8 M

### Mount Kits

- **UNO-100-DMKAE** UNO-2271G V3 DIN-rail mount kit
- **UNO-2000G-VMKAE** UNO-2000 VESA mount kit

### Miscellaneous

- **UNO-2000-LKAE** Cable lock kit, 10 units per pack
- **9891P383000** M.2 for 2242 B+M to E key convertor
- **AIW-166K3** Intel AX210 802.11ax+BT5.2

Vertrieb durch




**AMC – Analytik & Messtechnik GmbH Chemnitz**

Heinrich-Lorenz-Str. 55 Tel.: +49/371/38388-0  
09120 Chemnitz Fax: +49/371/38388-99  
E-Mail: info@amc-systeme.de Web: www.amc-systeme.de


# Extension Kits

## UNO-2271G-EKDE

Second stack extension kit for iDoor technology



### Front I/O

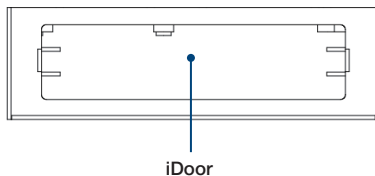

### Specifications

| General               |                                         |
|-----------------------|-----------------------------------------|
| I/O                   | 1 x iDoor slot (chassis only)           |
| Dimensions            | 100 x 70 x 30 mm/ 3.93 x 2.75 x 1.18 in |
| Weight                | 100 g/0.22 lb                           |
| Environment           |                                         |
| Operating Temperature | Dependent on iDoor module installed     |

### Ordering Information

| Part Number    | Description                                    |
|----------------|------------------------------------------------|
| UNO-2271G-EKDE | UNO-2271G V3 2nd stack extension kit for iDoor |

### Optional iDoor Modules\*

| Part Number    | Description                                                            |
|----------------|------------------------------------------------------------------------|
| PCM-34D2R4-AE  | 2-port isolated RS-422/485, M.2 B key (2242, USB 2.0), DB9             |
| PCM-34D2R2-AE  | 2-port isolated RS-232, M.2 B key (2242, USB 2.0), DB9                 |
| PCM-34D4R4-AE  | 4-port non-isolated RS-422/485, M.2 B key (2242, USB 2.0), DB37 cable  |
| PCM-34D4R2-AE  | 4-port non-isolated RS-232, M.2 B key (2242, USB 2.0), DB37 cable      |
| PCM-34R1TP-AE  | 1-port Gigabit Ethernet, Intel® i225, M.2 B+M key (3042, PCIe*1), RJ45 |
| PCM-34R2GL-AE  | 2-port Gigabit Ethernet, Intel® i350, M.2 B+M key (2242, PCIe*1), RJ45 |
| PCM-37D24DI-AE | 24-channel isolated digital I/O, M.2 B+M key (3042, PCIe*1), DB37      |


\*Contact Advantech for more compatible iDoor solutions.

## UNO-2271G-RP1EB

Second stack module with 2 x COM, 1 x PoE (PD), 1 x M.2 (B key)



### Front I/O

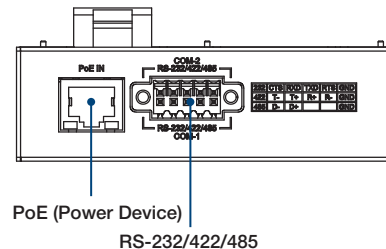

### Specifications

| General               |                                                                                                                                                                                                |
|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| I/O                   | 2 x COM (RS-232/422/485) terminal block<br>1 x PoE+ (802.3at) (power device)<br>Note: Because PoE can only provide 25.5W max. power, USB ports should only be used to connect USB 2.0 devices. |
| Expansion             | 1 x M.2 (B key) (SATA/USB 3.0 signals for LTE)                                                                                                                                                 |
| SIM Slot              | 1 x nano SIM slot                                                                                                                                                                              |
| Dimensions            | 100 x 70 x 30 mm/ 3.93 x 2.75 x 1.18 in                                                                                                                                                        |
| Weight                | 120 g/0.26 lb                                                                                                                                                                                  |
| Environment           |                                                                                                                                                                                                |
| Operating Temperature | -20 ~ 60 °C/-4 ~ 140 °F                                                                                                                                                                        |

### Ordering Information

| Part Number     | Description                                                             |
|-----------------|-------------------------------------------------------------------------|
| UNO-2271G-RP1EB | UNO-2271G V3 second stack module with 2 x COM, 1 x PoE, 1 x M.2 (B key) |

Vertrieb durch



**AMC – Analytik & Messtechnik GmbH Chemnitz**


Heinrich-Lorenz-Str. 55 Tel.: +49/371/38388-0  
09120 Chemnitz Fax: +49/371/38388-99  
E-Mail: info@amc-systeme.de Web: www.amc-systeme.de

## UNO-2271G-RS2EB

Second stack module with 2 x COM,  
1 x M.2 (B key), 1 x M.2 (E key)



### Front I/O

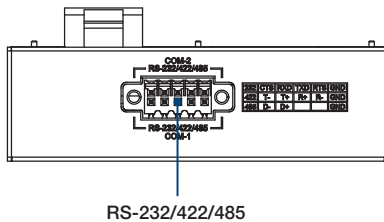

### Specifications

| General               |                                                                                                    |
|-----------------------|----------------------------------------------------------------------------------------------------|
| I/O                   | 2 x COM (RS-232/422/485) terminal block                                                            |
| Expansion             | 1 x M.2 (B key) (SATA/USB 3.0 signals for LTE)<br>1 x M.2 (E key) (PCIe/USB 2.0 signals for Wi-Fi) |
| Network Connectivity  | 1 x nano SIM slot                                                                                  |
| Dimensions            | 100 x 70 x 30 mm/ 3.93 x 2.75 x 1.18 in                                                            |
| Weight                | 120 g/0.26 lb                                                                                      |
| Environment           |                                                                                                    |
| Operating Temperature | -20 ~ 60 °C/-4 ~ 140 °F                                                                            |

### Ordering Information

| Part Number     | Description                                                         |
|-----------------|---------------------------------------------------------------------|
| UNO-2271G-RS2EB | UNO-2271G V3 second stack module with 2 x COM,<br>2 x M.2 (B+E key) |

Vertrieb durch



**AMC – Analytik & Messtechnik GmbH Chemnitz**

Heinrich-Lorenz-Str. 55 Tel.: +49/371/38388-0  
09120 Chemnitz Fax: +49/371/38388-99  
E-Mail: info@amc-systeme.de Web: www.amc-systeme.de