
Q.raxx X 19" AC

3HU Case for Q.raxx XE/XL Modules

Q.raxx X is an new addition to the Q.series product family - the ideal 19" rackmount solution for applications that require high channel density and custom sensor terminations.

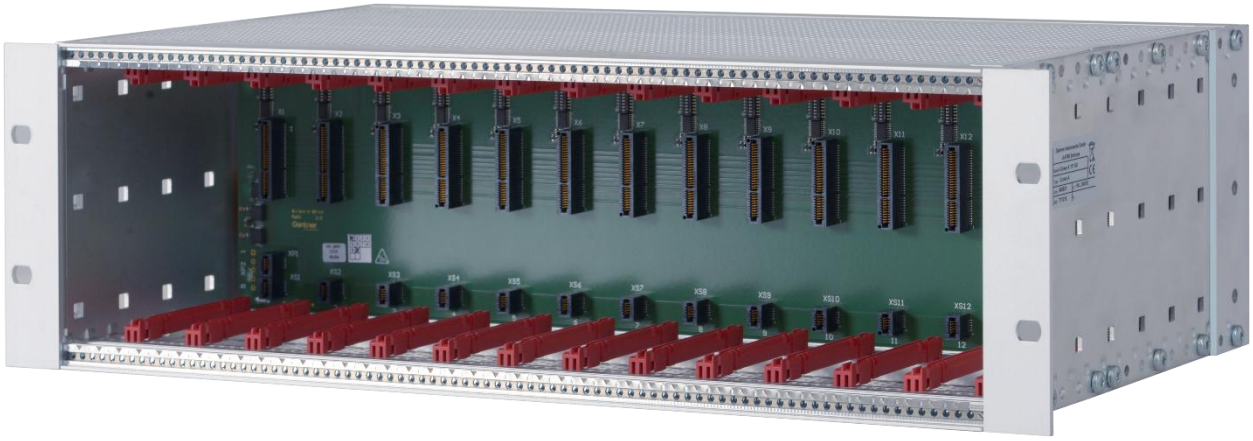

Features:

Power Supply

Supply voltage	110 V - 240 VAC to 24 VDC switching power supply
Power consumption	10 W Q.raxx X station (if slotted in) + appox. 2 W per slotted Module
Supply connector	Connector on the Back of the Rack
	AC Input on rear with standard ICE socket (Type C14)

Slots

Total amount	14
Controller Modules	If a Controller is necessary, it needs to be placed in the first (far left) slot

Housing (19" Rack)

Width	84 HP
Height	3 U
Depth	235 mm
Kind	Desktop or rack mounting

Environmental


Operating Temperature	-20 °C to +60 °C
Storage Temperature	-40 °C to +85 °C
Relative Humidity	5 % to 95 % at 50 °C, non-condensing

Ihr Ansprechpartner:
AMC – Analytik & Messtechnik GmbH Chemnitz
Heinrich-Lorenz-Str. 55
09120 Chemnitz
E-Mail: info@amc-systeme.de
Tel.: +49/371/38388-0
Fax: +49/371/38388-99
Web: www.amc-systeme.de


Q.raxx X 19" AC

3HU Case for Q.raxx XE/XL Modules

Backside pin assignment

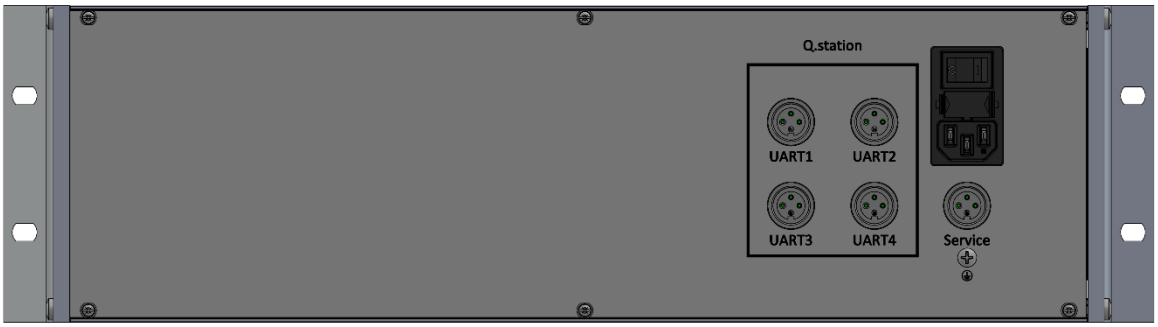

1	UART A
2	-
3	UART B



Ordering Information

Article number	563830

Ihr Ansprechpartner:

AMC – Analytik & Messtechnik GmbH Chemnitz

Heinrich-Lorenz-Str. 55
09120 Chemnitz
E-Mail: info@amc-systeme.de
Tel.: +49/371/38388-0
Fax: +49/371/38388-99
Web: www.amc-systeme.de

Irrtum und Änderungen vorbehalten – auch ohne vorherige Ankündigung. Verwendete Hardware- und Softwarebezeichnungen, Marken sowie Firmennamen können eingetragene Warenzeichen sein und unterliegen somit den gesetzlichen Bestimmungen. / Information in this document is subject to change without prior notice. The software and hardware designations or brand names used in this text are in most cases trademarks or registered trademarks of their respective companies and are thus subject to law.