

iDAQ-817

iDAQ-821

8-ch, 16-bit, 200kS/s, Analog Input iDAQ Module


4-ch, 16-bit, 10kS/s/ch, Analog Output iDAQ Module

Vertrieb durch



AMC – Analytik & Messtechnik GmbH Chemnitz

Heinrich-Lorenz-Str. 55 Tel.: +49/371/38388-0
09120 Chemnitz Fax: +49/371/38388-99
E-Mail: info@amc-systeme.de Web: www.amc-systeme.de

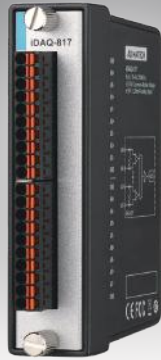

iDAQ-817

Specifications

Analog Input

- Channels 8 differential
- Resolution 16 bits
- ADC type Successive approximation (SAR)
- Input range ± 10 V or ± 20 mA, each channel can be configured independently by software
- Input common-mode voltage range ± 275 V max.
- Input coupling DC
- Input impedance Differential, voltage meas. 800 k Ω
Common-mode, voltage meas. 200 k Ω
Current measurement 500 Ω
- Isolation protection 600 VRMS
- Operation mode Instant or buffered, software configurable
- Sample rate (200 / n) kHz max., where n is the number of enabled channels, software configurable
- Internal data buffer (FIFO) size 512 samples
- Absolute accuracy

Meas. Mode	Voltage	Current
Offset Error (max.)	± 1 mV	± 20 μ A
Gain Error (max.)	$\pm 0.01\%$ of FSR*	$\pm 0.1\%$ of FSR*

- Temperature drift Offset drift 25 ppm/ $^{\circ}$ C
Gain drift 15 ppm/ $^{\circ}$ C
- Bandwidth (-3dB) 78 kHz
- DC performance Idle channel noise 0.34 mVRMS /0.7ARMS
Effective resolution 15.8 bits
- AC performance Signal-to-noise ratio (SNR) 86 dB
Total harmonic distortion (THD) -98 dB
Total harmonic distortion plus noise (THD+N) 86 dB
Effective number of bits (ENOB) 14.0 bits
Spurious-free dynamic range (SFDR) 103 dB
Crosstalk -85 dB

General

- Power consumption from chassis 1W typ./1.25W max.
- Dimensions 100 x 80 x 25 mm (3.94 x 3.15 x 0.98 in.)
- Operating temperature -20 $^{\circ}$ C to 60 $^{\circ}$ C (-4 $^{\circ}$ F to 140 $^{\circ}$ F)
- Storage temperature -40 $^{\circ}$ C to 70 $^{\circ}$ C (-40 $^{\circ}$ F to 158 $^{\circ}$ F)
- Operating humidity 10% to 90% RH, non-condensing
- Storage humidity 5% to 95% RH, non-condensing
- Vibration 5Grms
- Shock 30G
- Certification EMC: CE, FCC
Safety: CB, UL

Ordering Information

- iDAQ-817-AE 8-ch, 16-bit, 200 kS/s, AI iDAQ module

*FSR: full scale range

iDAQ-821

Specifications

Analog Input

- Channels 4
- Resolution 16 bits
- Output range 0-5 V, 0-10 V, ± 5 V, ± 10 V, 0-20mA, 4-20mA, software selectable per channel
- Output coupling DC
- Output slew rate 1 V/ μ s
- Output load Voltage output 1 k Ω min.
Current output 520 Ω max.
Voltage output 0.06 Ω typ.
Current output 100 M Ω typ.
- Output impedance 600 VRMS
- Isolation protection 0 V
- Power-on output state Static or buffered, software configurable
- Operation mode 10 kHz max. per channel, software configurable
- Update rate 512 samples
- Internal data buffer (FIFO) size 512 samples
- Absolute accuracy

Meas. Mode	Voltage	Current
Offset Error (max.)	± 1 mV	± 20 μ A
Gain Error (max.)	$\pm 0.01\%$ of FSR*	$\pm 0.1\%$ of FSR*

- Temperature drift Offset drift 25 ppm/ $^{\circ}$ C
Gain drift 15 ppm/ $^{\circ}$ C
- Bandwidth (-3dB) 78 kHz
- DC performance Idle channel noise 0.34 mVRMS /0.7ARMS
Idle channel noise 0.2 mVRMS @ bandwidth of 100 kHz
Effective resolution 16 bits

General

- Power consumption from chassis 0.675W typ./2.9W max.
- Dimensions 100 x 80 x 25 mm (3.94 x 3.15 x 0.98 in.)
- Operating temperature -20 $^{\circ}$ C to 60 $^{\circ}$ C (-4 $^{\circ}$ F to 140 $^{\circ}$ F)
- Storage temperature -40 $^{\circ}$ C to 70 $^{\circ}$ C (-40 $^{\circ}$ F to 158 $^{\circ}$ F)
- Operating humidity 10% to 90% RH, non-condensing
- Storage humidity 5% to 95% RH, non-condensing
- Vibration 5Grms
- Shock 30G
- Certification EMC: CE, FCC
Safety: CB, UL

Ordering Information

- iDAQ-821-AE 4-ch, 16-bit, 10 kS/s/ch AO iDAQ module