
USB-6423 and USB-6423 (OEM) Specifications

Ihr NI-Partner: 

AMC – Analytik & Messtechnik GmbH Chemnitz

Heinrich-Lorenz-Str. 55 Tel.: +49/371/38388-0
09120 Chemnitz Fax: +49/371/38388-99
E-Mail: info@amc-systeme.de Web: www.amc-systeme.de

 Integration
Partner

SYSTEM INTEGRATOR

2025-11-24



Contents

USB-6423 and USB-6423 (OEM) Specifications 3

USB-6423 and USB-6423 (OEM) Specifications

USB-6423 and USB-6423 (OEM) Specifications

These specifications apply to the USB-6423 and USB-6423 (OEM). Unless the OEM version is specified, USB-6423 refers to both versions.

Revision History

Version	Date changed	Description
379042E-01	April 2025	Added onboard temperature sensor specifications and support for ID pin feature.
379042D-01	February 2025	Added 1.8 V, 2.5 V, and 3.3 V logic families and analog triggers.
379042C-01	November 2024	Added USB-6423 (OEM).
379042B-01	October 2024	Updated for the NI mioDAQ 24C3 release.
379042A-01	September 2024	Initial release.

Looking For Something Else?

For information not found in the specifications for your product, such as operating instructions, browse ***Related Information***.

Related information:

- [USB-6423 and USB-6423 \(OEM\) User Manual](#)
- [Software and Driver Downloads](#)
- [Dimensional Drawings](#)
- [Product Certifications](#)
- [Letter of Volatility](#)

- [Discussion Forums](#)

Definitions

Warranted specifications describe the performance of a model under stated operating conditions and are covered by the model warranty.

Characteristics describe values that are relevant to the use of the model under stated operating conditions but are not covered by the model warranty.

- **Typical** specifications describe the performance met by a majority of models.
- **Nominal** specifications describe an attribute that is based on design, conformance testing, or supplemental testing.

Specifications are **Typical** unless otherwise noted.

Conditions

Specifications are valid at 25 °C unless otherwise noted.

USB-6423 AI Connector Pinout

Use the pinout to connect to analog input terminals on the USB-6423.

Figure 1. USB-6423 AI Connector Pinout

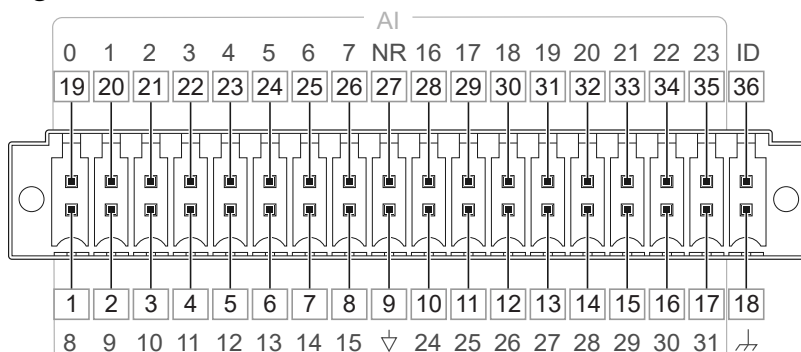


Table 1. USB-6423 AI Connector Pin Assignments

Pin	Signal
1	AI 8
2	AI 9
3	AI 10
4	AI 11
5	AI 12
6	AI 13
7	AI 14
8	AI 15
9	AI GND
10	AI 24
11	AI 25
12	AI 26
13	AI 27
14	AI 28
15	AI 29
16	AI 30
17	AI 31
18	CHSGND
19	AI 0
20	AI 1
21	AI 2
22	AI 3
23	AI 4
24	AI 5
25	AI 6
26	AI 7

Pin	Signal
27	NR (AI SENSE)
28	AI 16
29	AI 17
30	AI 18
31	AI 19
32	AI 20
33	AI 21
34	AI 22
35	AI 23
36	ID 0

Table 2. USB-6423 AI Connector Signal Descriptions

Signal	Function	Reference	Direction	Description
AI <0..7> AI <16..23>	Analog input channels	Varies	Input	Supports differential or single-ended measurement modes. The default configuration is differential mode. In differential mode, these channels are the positive input for the differential pair. The negative input of the differential pair is located directly beneath the positive input. In single-ended mode, each signal is a separate analog input voltage channel. The ground reference in single-ended mode is configurable. In referenced single-ended (RSE) mode, AI GND is the reference for the voltage measurement. In non-referenced single-ended (NRSE) mode, the NR pin is the reference.  Note You can configure the input mode per channel.

Signal	Function	Reference	Direction	Description
AI <8..15> AI <24..31>	Analog input channels	Varies	Input	Supports single-ended measurements only. The default configuration is (RSE) mode. In RSE mode, AI GND is the reference for the voltage measurement. In NRSE mode, the NR pin is the reference. For differential measurements, refer to the descriptions for AI <0..7> and AI <16..23>.
AI GND	Analog input ground	—	—	The reference point for single-ended measurements in RSE mode and the bias current return point for differential measurements. AI GND, AO GND, D GND, and CHSGND are all connected internally.
NR (AI SENSE)	AI SENSE for NRSE mode	—	Input	The AI SENSE pin is labeled "NR" because it is used when the input terminal is configured to NRSE mode. In NRSE mode, AI SENSE acts as a remote sense of a reference voltage that can be at a different voltage potential than AI GND.
CHSGND	Chassis ground	—	—	Connects directly to the chassis ground of the USB-6423 enclosure. It can be used as a termination point for shielded cables to help improve measurement quality.
ID 0	Identification pin 0 for the AI connector	D GND	Input or output	Can be connected to a 1-wire EEPROM for storing test setup identification information. Leave this pin open if you do not use it. Refer to the ID Pin section for more information.

Related information:

- [ID pin](#)

USB-6423 AO/DIO Connector Pinout

Use the pinout to connect to analog output and digital input/output terminals on the

USB-6423.

Figure 2. USB-6423 AO/DIO Connector Pinout

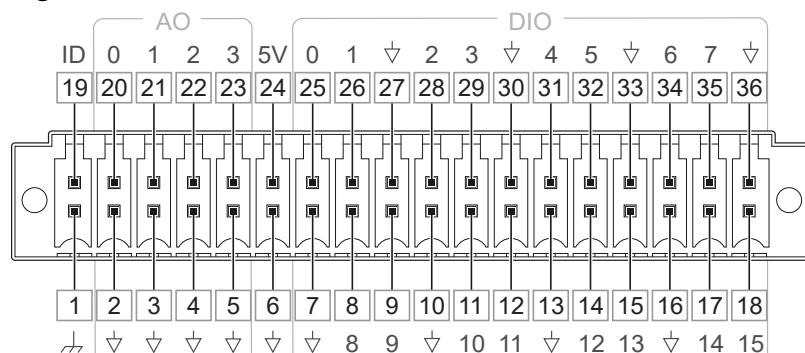


Table 3. USB-6423 AO/DIO Connector Pin Assignments

Pin	Signal
1	CHSGND
2	AO GND
3	AO GND
4	AO GND
5	AO GND
6	D GND
7	D GND
8	PFI 8/P0.8 (port0/line8)
9	PFI 9/P0.9 (port0/line9)
10	D GND
11	PFI 10/P0.10 (port0/line10)
12	PFI 11/P0.11 (port0/line11)
13	D GND
14	PFI 12/P0.12 (port0/line12)
15	PFI 13/P0.13 (port0/line13)
16	D GND
17	PFI 14/P0.14 (port0/line14)
18	PFI 15/P0.15 (port0/line15)

Pin	Signal
19	ID 1
20	AO 0
21	AO 1
22	AO 2
23	AO 3
24	+5 V
25	PFI 0/P0.0 (port0/line0)
26	PFI 1/P0.1 (port0/line1)
27	D GND
28	PFI 2/P0.2 (port0/line2)
29	PFI 3/P0.3 (port0/line3)
30	D GND
31	PFI 4/P0.4 (port0/line4)
32	PFI 5/P0.5 (port0/line5)
33	D GND
34	PFI 6/P0.6 (port0/line6)
35	PFI 7/P0.7 (port0/line7)
36	D GND

Table 4. USB-6423 AO/DIO Connector Signal Descriptions

Signal	Function	Reference	Direction	Description
AO <0..3>	Analog output channels	AO GND	Output	Supplies the voltage output of the AO channels.
AO GND	Analog output ground	—	—	AO GND is the reference for the AO channels. AI GND, AO GND, D GND, and CHSGND are all connected internally.

Signal	Function	Reference	Direction	Description
+5 V	+5 V power source	D GND	Output	Provides current limited +5 V power output that can be used to power external circuitry. Refer to the +5 V Power Source section for more information. Leave this pin open if you do not use it.
PFI <0..15>/P0.<0..15>	Port 0 digital I/O channels	D GND	Input or output	Digital channels that can be individually configured as input or output. These channels are referred to as port0/line0:15 in software when used as digital I/O. They are referred to as PFI 0:15 when used for other purposes, like timing I/O. Can also be individually configured for the following uses. • Digital I/O • Counter/timer input • Counter/timer output • External timing or trigger signal input for AI, AO, DI, DO, counter, or timers • Timing or trigger signal output from AI, AO, DI, DO, counter, or timers
D GND	Digital ground	—	—	Supplies the reference for the P0.<0..15> pins and +5 V pin. AI GND, AO GND, D GND, and CHSGND are all connected internally.
CHSGND	Chassis ground	—	—	Connects directly to the chassis ground of the USB-6423 enclosure. It can be used as a termination point for shielded cables to help improve measurement quality.
ID 1	Identification	D GND	Input or	Can be connected to a 1-wire EEPROM

Signal	Function	Reference	Direction	Description
	pin 1 for the AO/DIO connector		output	for storing test setup identification information. Leave this pin open if you do not use it. Refer to the ID Pin section for more information.

Related information:

- [+5 V Power Source](#)
- [ID pin](#)

USB-6423 (OEM) AI Connector Pinout

Use the pinout to connect to analog input terminals on the USB-6423 (OEM).

Figure 3. USB-6423 (OEM) AI Connector Pinout

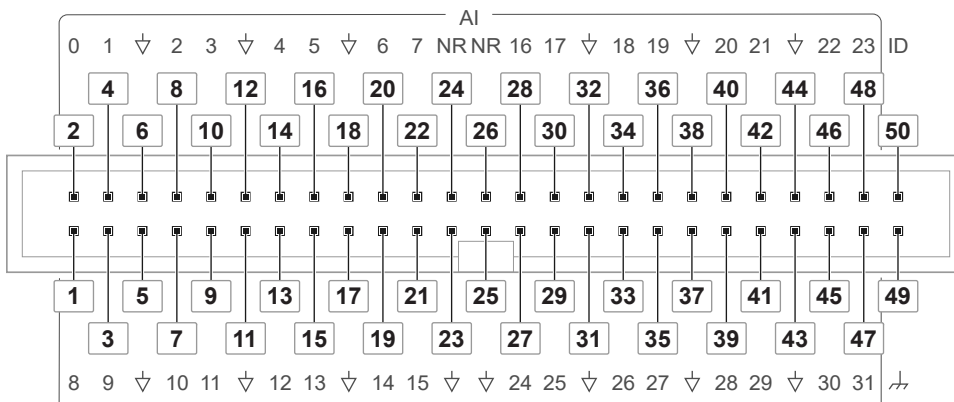


Table 5. USB-6423 (OEM) AI Connector Pin Assignments

Pin	Signal
1	AI 8
2	AI 0
3	AI 9
4	AI 1
5	AI GND
6	AI GND
7	AI 10

Pin	Signal
8	AI 2
9	AI 11
10	AI 3
11	AI GND
12	AI GND
13	AI 12
14	AI 4
15	AI 13
16	AI 5
17	AI GND
18	AI GND
19	AI 14
20	AI 6
21	AI 15
22	AI 7
23	AI GND
24	NR (AI SENSE)
25	AI GND
26	NR (AI SENSE)
27	AI 24
28	AI 16
29	AI 25
30	AI 17
31	AI GND
32	AI GND
33	AI 26
34	AI 18

Pin	Signal
35	AI 27
36	AI 19
37	AI GND
38	AI GND
39	AI 28
40	AI 20
41	AI 29
42	AI 21
43	AI GND
44	AI GND
45	AI 30
46	AI 22
47	AI 31
48	AI 23
49	CHSGND
50	ID 0

Table 6. USB-6423 (OEM) AI Connector Signal Descriptions

Signal	Function	Reference	Direction	Description
AI <0..7> AI <16..23>	Analog input channels	Varies	Input	Supports differential or single-ended measurement modes. The default configuration is differential mode. In differential mode, these channels are the positive input for the differential pair. The negative input of the differential pair is located directly beneath the positive input. In single-ended mode, each signal is a separate analog input voltage channel. The ground

Signal	Function	Reference	Direction	Description
				reference in single-ended mode is configurable. In referenced single-ended (RSE) mode, AI GND is the reference for the voltage measurement. In non-referenced single-ended (NRSE) mode, the NR pin is the reference.  Note You can configure the input mode per channel.
AI <8..15> AI <24..31>	Analog input channels	Varies	Input	Supports single-ended measurements only. The default configuration is RSE mode. In RSE mode, AI GND is the reference for the voltage measurement. In NRSE mode, the NR pin is the reference. For differential measurements, refer to the descriptions for AI <0..7> and AI <16..23>.
AI GND	Analog input ground	—	—	The reference point for single-ended measurements in RSE mode and the bias current return point for differential measurements. AI GND, AO GND, D GND, and CHSGND are all connected internally.
NR (AI SENSE)	AI SENSE for NRSE mode	—	Input	The AI SENSE pin is labeled "NR" because it is used when the input terminal is configured to NRSE mode. In NRSE mode, AI SENSE acts as a remote sense of a reference voltage that can be at a different voltage potential than AI GND.
CHSGND	Chassis ground	—	—	Connects directly to the chassis ground lug of the USB-6423 (OEM). It can be used as a termination point for shielded cables to help improve measurement quality.
ID 0	Identification pin 0 for the AI connector	D GND	Input or output	Can be connected to a 1-wire EEPROM for storing test setup identification information. Leave this pin open if you do not use it. Refer to the ID Pin section for more information.

Related information:

- [ID pin](#)

USB-6423 (OEM) AO/DIO Connector Pinout

Use the pinout to connect to analog output and digital input/output terminals on the USB-6423 (OEM).

Figure 4. USB-6423 (OEM) AO/DIO Connector Pinout

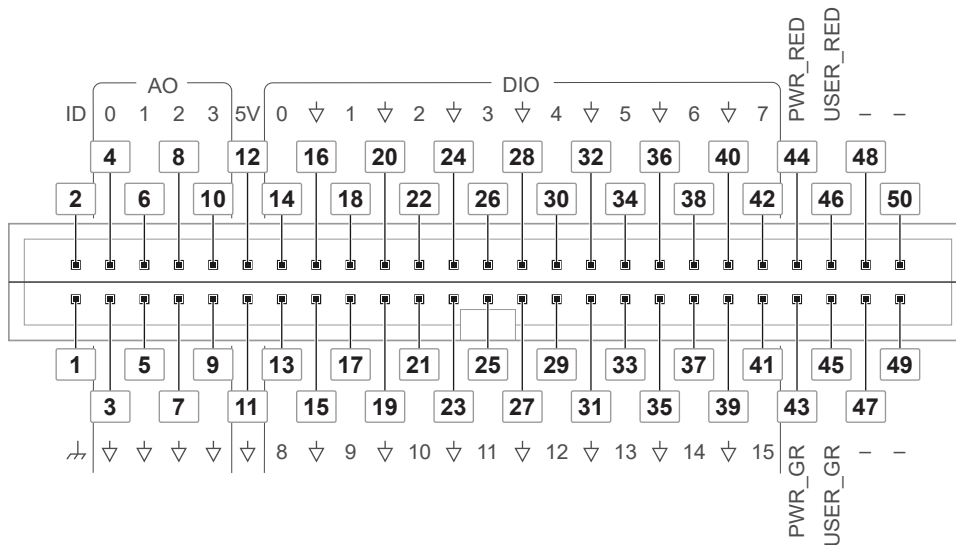


Table 7. USB-6423 (OEM) AO/DIO Connector Pin Assignments

Pin	Signal
1	CHSGND
2	ID 1
3	AO GND
4	AO 0
5	AO GND
6	AO 1
7	AO GND
8	AI 2
9	AO GND

Pin	Signal
10	AI 3
11	D GND
12	+5 V
13	PFI 8/P0.8 (port0/line8)
14	PFI 0/P0.0 (port0/line0)
15	D GND
16	D GND
17	PFI 9/P0.9 (port0/line9)
18	PFI 1/P0.1 (port0/line1)
19	D GND
20	D GND
21	PFI 10/P0.10 (port0/line10)
22	PFI 2/P0.2 (port0/line2)
23	D GND
24	D GND
25	PFI 11/P0.11 (port0/line11)
26	PFI 3/P0.3 (port0/line3)
27	D GND
28	D GND
29	PFI 12/P0.12 (port0/line12)
30	PFI 4/P0.4 (port0/line4)
31	D GND
32	D GND
33	PFI 13/P0.13 (port0/line13)
34	PFI 5/P0.5 (port0/line5)
35	D GND
36	D GND

Pin	Signal
37	PFI 14/P0.14 (port0/line14)
38	PFI 6/P0.6 (port0/line6)
39	D GND
40	D GND
41	PFI 15/P0.15 (port0/line15)
42	PFI 7/P0.7 (port0/line7)
43	PWR_GR
44	PWR_RED
45	USER_GR
46	USER_RED
47	No connect
48	No connect
49	No connect
50	No connect

Table 8. USB-6423 (OEM) AO/DIO Connector Signal Descriptions

Signal	Function	Reference	Direction	Description
AO <0..3>	Analog output channels	AO GND	Output	Supplies the voltage output of the AO channels.
AO GND	Analog output ground	—	—	AO GND is the reference for the AO channels. AI GND, AO GND, D GND, and CHSGND are all connected internally.
+5 V	+5 V power source	D GND	Output	Provides current limited +5 V power output that can be used to power external circuitry. Refer to the +5 V Power Source section for more information. Leave this pin open if you

Signal	Function	Reference	Direction	Description
				do not use it.
PFI <0..15>/P0.<0..15>	Port 0 digital I/O channels	D GND	Input or output	Digital channels that can be individually configured as input or output. These channels are referred to as port0/line0:15 in software when used as digital I/O. They are referred to as PFI 0:15 when used for other purposes, like timing I/O. Can also be individually configured for the following uses. • Digital I/O • Counter/timer input • Counter/timer output • External timing or trigger signal input for AI, AO, DI, DO, counter, or timers • Timing or trigger signal output from AI, AO, DI, DO, counter, or timers
D GND	Digital ground	—	—	Supplies the reference for the P0.<0..15> pins and +5 V pin. AI GND, AO GND, D GND, and CHSGND are all connected internally.
CHSGND	Chassis ground	—	—	Connects directly to the chassis ground of the USB-6423 (OEM) enclosure. It can be used as a termination point for shielded cables to help improve measurement quality.
PWR_GR	USB PWR LED green color	D GND	Output	Digital logic control signal that is high when the USB PWR LED is green or yellow. You can use this signal to drive an external LED.

Signal	Function	Reference	Direction	Description
				Leave this pin open if you do not use it.
PWR_RED	USB PWR LED red color	D GND	Output	Digital logic control signal that is high when the USB PWR LED is red or yellow. You can use this signal to drive an external LED. Leave this pin open if you do not use it.
USER_GR	User LED green color	D GND	Output	Digital logic control signal that is high when the USER LED is green or yellow. You can use this signal to drive an external LED. Leave this pin open if you do not use it.
USER_RED	User LED red color	D GND	Output	Digital logic control signal that is high when the USER LED is red or yellow. You can use this signal to drive an external LED. Leave this pin open if you do not use it.
ID 1	Identification pin 1 for the AO/DIO connector	D GND	Input or output	Can be connected to a 1-wire EEPROM for storing test setup identification information. Leave this pin open if you do not use it. Refer to the ID Pin section for more information.

Related information:

- [ID pin](#)

Analog Input

Number of channels	32 single-ended or 16 differential
ADC resolution	16 bits
DNL	No missing codes guaranteed
INL	Refer to <i>AI Absolute Accuracy</i>

Sample rate	
Single channel maximum	250 kS/s
Multichannel maximum (aggregate)	250 kS/s
Minimum	No minimum
Timing resolution	10 ns
Timing accuracy	50 ppm of sample rate

Input coupling	DC
Input range	± 0.2 V

	$\pm 1\text{ V}$ $\pm 5\text{ V}$ $\pm 10\text{ V}$
Power on state	Differential Mode at 10 V Range

Maximum working voltage for analog inputs (signal + common mode)	
All input ranges ($\pm 0.2\text{V}$, $\pm 1\text{ V}$, $\pm 5\text{ V}$, $\pm 10\text{ V}$)	$\pm 11\text{ V}$ to AI GND

Table 9. Input Impedance


Device on	AI+ to AI GND	$>10\text{ G}\Omega$ in parallel with 50 pF
	AI- to AI GND	$>10\text{ G}\Omega$ in parallel with 50 pF
Device off	AI+ to AI GND	1,250 Ω
	AI- to AI GND	1,250 Ω

Input bias current	$\pm 30\text{ pA}$ typical $\pm 1\text{ nA}$ maximum over full temperature range
--------------------	---

Crosstalk (at 100 kHz)	
Differential channels	-65 dB
Single-ended channels	-50 dB


Small signal bandwidth (-3 dB)	
Input range ± 10 V	630 kHz
Input range ± 5 V	510 kHz
Input range ± 1 V, ± 0.2 V	490 kHz

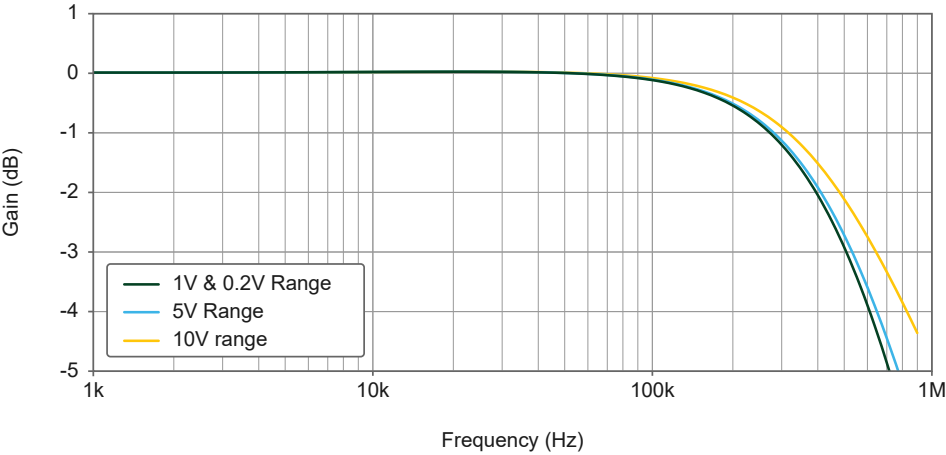Figure 5. USB-6423 Small Signal Bandwidth versus Frequency



Common-mode rejection ratio (CMRR) (DC to 60 Hz)	
Differential mode	100 dB
Non-referenced single-ended (NRSE) mode	90 dB

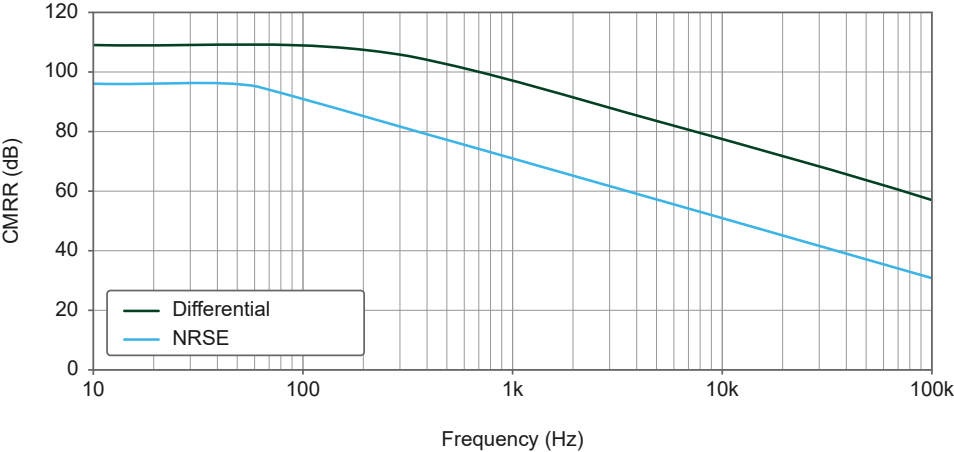Figure 6. USB-6423 CMRR versus Frequency



Input FIFO size	8,191 samples shared among channels used
Scan list memory	4,095 entries
Data transfers	USB Signal Stream, programmed I/O

Overvoltage protection for AI<0..31> and NR (AI Sense) pins	
Device on	±30 V for up to two AI pins
Device off	±20 V for up to two AI pins
Input current during overvoltage condition	±16 mA maximum per AI pin ±16 mA maximum per NR pin


Table 10. Settling Time for Multi-channel Measurements at Full-Scale Step

Input Range	±90 ppm (6 LSB)	±30 ppm (2 LSB)	±15 ppm (1 LSB)
±0.2 V, ±1 V, ±5 V, ±10 V	4 μs	6 μs	7 μs



Note Refer to the ***Multi-channel Scanning Considerations*** section in the ***USB-6423 and USB-6423 (OEM) User Manual*** for the best settling time performance.

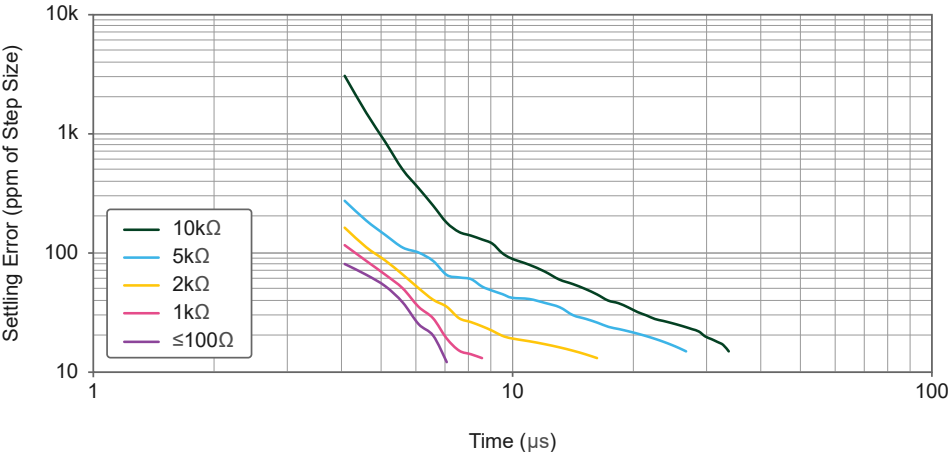Figure 7. USB-6423 Settling Error versus Time for Different Source Impedances



Related information:

- [Multi-channel Scanning Considerations](#)

Analog Triggers

Source	AI<0..31>
Purpose	Reference trigger only
Level	Full scale (depending on AI input range for the selected trigger channel)
Resolution	16-bit
Accuracy	Same as <i>AI Absolute Accuracy</i>

Modes	Rising-edge, rising-edge with hysteresis, falling-edge, falling-edge with hysteresis, entering window, leaving window
-------	---

AI Absolute Accuracy (Warranted)



Notice The input channels of the USB-6423 are sensitive to electromagnetic interference (EMI). As a result, you might experience reduced measurement accuracy or temporary performance degradation with cables routed through strong EMI environments. To ensure optimal performance, either avoid such environments, or carefully select and route cables or probes connected to the USB-6423. This notice does not apply to the USB-6423 (OEM).

Table 11. AI Absolute Accuracy

Nominal Range, Positive Full Scale (V)	Nominal Range, Negative Full Scale (V)	2 Years Residual Gain Error (ppm of Reading)	10 Years Residual Gain Error (ppm of Reading)	Gain Tempco (ppm of Range/°C)	Residual Offset Error (ppm of Range)	Offset Tempco (ppm of Range/°C)	Random Noise, σ (μ V RMS)	2 Years Absolute Accuracy at Full Scale (μ V)	10 Years Absolute Accuracy at Full Scale (μ V)
10	-10	102	172	15	21	40	240	2,607	3,307
5	-5	110	180	15	23	40	122	1,354	1,704
1	-1	110	180	15	26	44	28	278	348
0.2	-0.2	122	192	15	78	60	13	72	86



Note Absolute accuracy at full scale on the analog input channels is determined using the following assumptions:

- **Temp Change From Last External Cal** = 10 °C
- **Temp Change From Last Internal Cal** = 1 °C
- **Number of readings** = 10,000
- **Coverage Factor** = 3σ



Note Accuracies listed are valid for up to 2 and 10 years from the device

external calibration.

Reference Tempco	5 ppm/°C
INL error	32 ppm of range

AI Absolute Accuracy Equation

$$\text{Absolute Accuracy} = \text{Reading} * (\text{Gain Error}) + \text{Range} * (\text{Offset Error}) + \text{Noise Uncertainty}$$

- $\text{Gain Error} = \text{Residual Gain Error} + \text{Gain Tempco} * (\text{Temp Change From Last Internal Cal}) + \text{Reference Tempco} * (\text{Temp Change From Last External Cal})$
- $\text{Offset Error} = \text{Residual Offset Error} + \text{Offset Tempco} * (\text{Temp Change From Last Internal Cal}) + \text{INL Error}$
- $\text{Noise Uncertainty} = \frac{\text{Random Noise} * 3}{\sqrt{10,000}}$

For a coverage factor of 3 σ and averaging 10,000 points.

AI Absolute Accuracy Example

For example, on the 10 V range for 2 years calibration interval, the absolute accuracy at full scale is as follows:

- $\text{Gain Error: } 102 \text{ ppm} + 15 \text{ ppm} * 1 + 5 \text{ ppm} * 10 = 167 \text{ ppm}$
- $\text{Offset Error: } 21 \text{ ppm} + 40 \text{ ppm} * 1 + 32 \text{ ppm} = 93 \text{ ppm}$
- $\text{Noise Uncertainty: } \frac{240 \text{ } \mu\text{V} * 3}{\sqrt{10,000}} = 7.2 \text{ } \mu\text{V}$
- $\text{Absolute Accuracy: } 10 \text{ V} * (\text{Gain Error}) + 10 \text{ V} * (\text{Offset Error}) + \text{Noise Uncertainty} = 2,607 \text{ } \mu\text{V}$

Analog Output

Number of channels	4
DAC resolution	16 bits

DNL	± 1 LSB
Monotonicity	16 bits guaranteed

Maximum update rate (simultaneous)	
All channels	250 kS/s
Timing accuracy	50 ppm of sample rate
Timing resolution	10 ns

Output range	± 10 V
Output coupling	DC
Output impedance ¹	0.05 Ω
Output current drive	± 2 mA
Overdrive protection during power on/off	± 30 V
Overdrive current	2.8 mA

1. Output impedance excludes cabling impedance.

Power-on state	Less than ± 5 mV
Output FIFO size	16,383 samples shared among channels used
Data transfers	USB Signal Stream, programmed I/O
AO waveform modes	Non-periodic waveform Periodic waveform regeneration mode from onboard FIFO Periodic waveform regeneration from host buffer, including dynamic update
Settling time, full-scale step, 15 ppm (1 LSB)	25 μ s with 50 pF load
Slew rate	8 V/ μ s

AO glitch

Device power up	± 0.9 V peak for 8 ms
Device power down, reset, or USB hot unplug	-1.4 V peak for 400 ns

Glitch energy mid-scale code transition	± 5 mV for 5 μ s
Crosstalk (at 10 kHz)	< -100 dB

AO Absolute Accuracy (Warranted)



Notice The output channels of the USB-6423 are sensitive to electromagnetic interference (EMI). As a result, you might experience reduced measurement accuracy or temporary performance degradation with cables routed through strong EMI environments. To ensure optimal performance, either avoid such environments, or carefully select and route cables or probes connected to the USB-6423. This notice does not apply to the USB-6423 (OEM).

Absolute accuracy at full-scale numbers is valid immediately following internal calibration and assumes the device is operating within 10 °C of the last external calibration.

Table 12. AO Absolute Accuracy

Nominal Range, Positive Full Scale (V)	Nominal Range, Negative Full Scale (V)	2 Years Residual Gain Error (ppm of Reading)	10 Years Residual Gain Error (ppm of Reading)	Gain Tempco (ppm of Range/°C)	Residual Offset Error (ppm of Range)	Offset Tempco (ppm of Range/°C)	2 Years Absolute Accuracy at Full Scale (μV)	10 Years Absolute Accuracy at Full Scale (μV)
10	-10	106	176	17	34	40.7	2,787	3,487



Note Accuracies listed are valid for up to 2 and 10 years from the device external calibration.

Reference Tempco	5 ppm/°C
INL error	31 ppm of range

AO Absolute Accuracy Equation

$$\text{Absolute Accuracy} = \text{Output Value} * (\text{Gain Error}) + \text{Range} * (\text{Offset Error})$$

- $\text{Gain Error} = \text{Residual Gain Error} + \text{Gain Tempco} * (\text{Temp Change From Last Internal Cal}) + \text{Reference Tempco} * (\text{Temp Change From Last External Cal})$
- $\text{Offset Error} = \text{Residual Offset Error} + \text{Offset Tempco} * (\text{Temp Change From Last Internal Cal}) + \text{INL Error}$

Digital I/O (PFI)

Number of channels	16
Capabilities	Static Digital I/O, Waveform Digital I/O, PFI, Counter, Timer, or Trigger I/O (configurable per line)
Direction control	Each terminal can be programmed individually as input or output
Logic family	Selectable in software. All lines share the same setting. 5 V (LVCMOS) 3.3 V 2.5 V 1.8 V
Default logic family setting	5.5 V (LVCMOS)

Electrical Characteristics

Ground reference	D GND
Direction control	Program each as input or output individually

Pull-down resistor	47 k Ω
Input voltage protection	± 20 V per line, up to two lines simultaneously



Notice Stresses beyond those listed under the Input voltage protection specification may cause permanent damage to the USB-6423.

Static Digital I/O Capabilities

Channel names in software	Port0/line0:15
---------------------------	----------------

Waveform Digital I/O Capabilities

Channel names in software	Port0/line0:15
Port/sample size	Up to 16 bits
Waveform generation (DO) FIFO	8,191 samples
Waveform acquisition (DI) FIFO	1,023 samples
DO or DI sample clock frequency	0 MHz to 10 MHz, system and bus activity dependent
Data transfers	USB Signal Stream, programmed I/O

Digital line filter settings	160 ns
	10.24 μ s
	5.12 ms
	Disable

PFI Functionality

Channel names in software	PFI0:15
Functionality	Timing input Timing output
Timing output sources	Many AI, AO, counter, DI, and DO timing signals

Recommended Operating Conditions

Output high current (I_{OH})	
DIO<0..15>	-10 mA maximum per channel

Output low current (I_{OL})	
DIO<0..15>	10 mA maximum per channel



Note The maximum output current is shared between all channels and the +5 V power source.

Table 13. Digital Input Logic Levels

Logic Family	Input Low Voltage (V_{IL})		Input High Voltage (V_{IH})	
	Minimum	Maximum	Minimum	Maximum
1.8 V	-0.5 V	0.62 V	1.19 V	5.25 V
2.5 V	-0.5 V	0.70 V	1.76 V	5.25 V
3.3 V	-0.5 V	0.80 V	2.00 V	5.25 V
5.0 V	-0.5 V	1.46 V	3.66 V	5.25 V

Table 14. Digital Output Logic Level

Logic Family	Current	Output Low Voltage (V_{OL}) Maximum	Output High Voltage (V_{OH}) Minimum
1.8 V	4 mA	0.36 V	1.39 V
2.5 V	4 mA	0.32 V	2.16 V
3.3 V	4 mA	0.31 V	2.97 V
5.0 V	4 mA	0.30 V	4.59 V

Digital I/O Characteristics

I_{IL} input low current ($V_{IN} = 0$ V)	-1 μ A maximum
I_{IH} input high current ($V_{IN} = 5$ V)	110 μ A maximum

Figure 8. I_{OH} versus V_{OH} , 1.8 V Logic Family

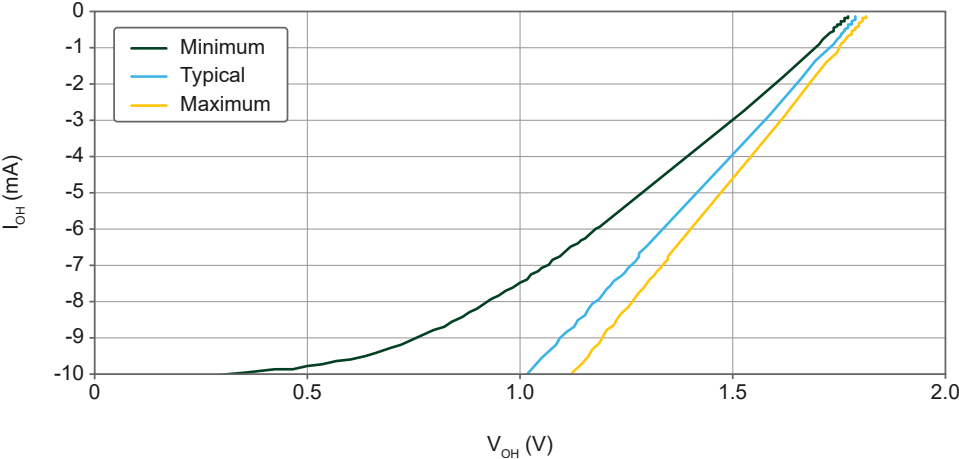


Figure 9. I_{OL} versus V_{OL} , 1.8 V Logic Family

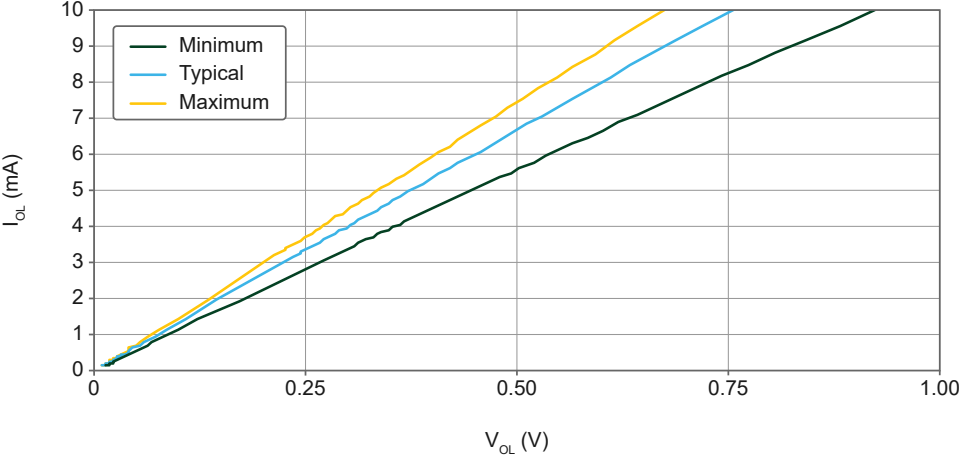


Figure 10. I_{OH} versus V_{OH} , 2.5 V Logic Family

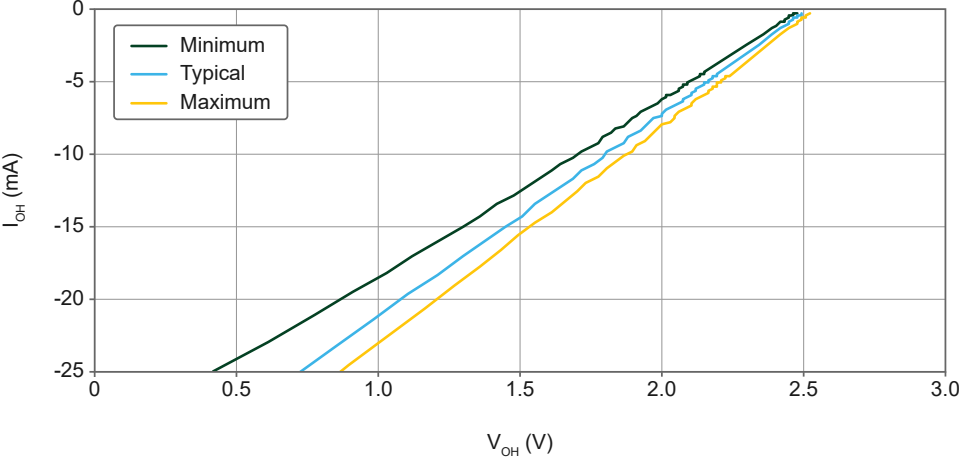


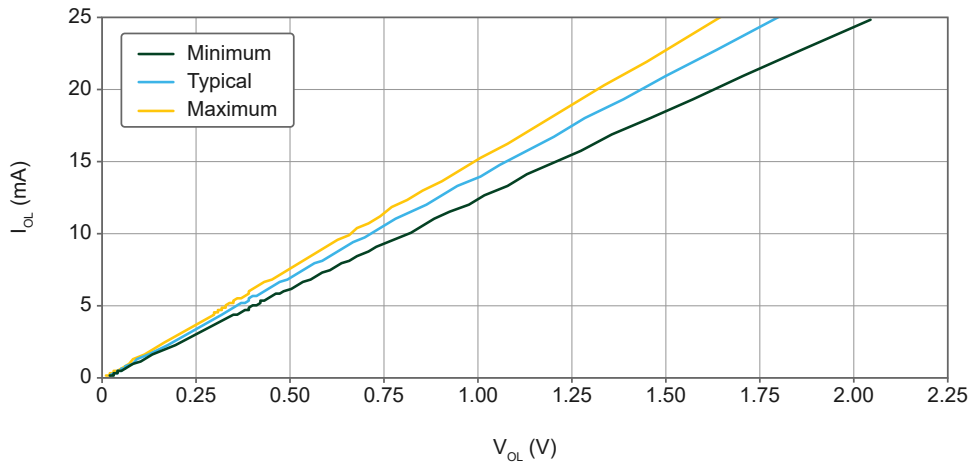
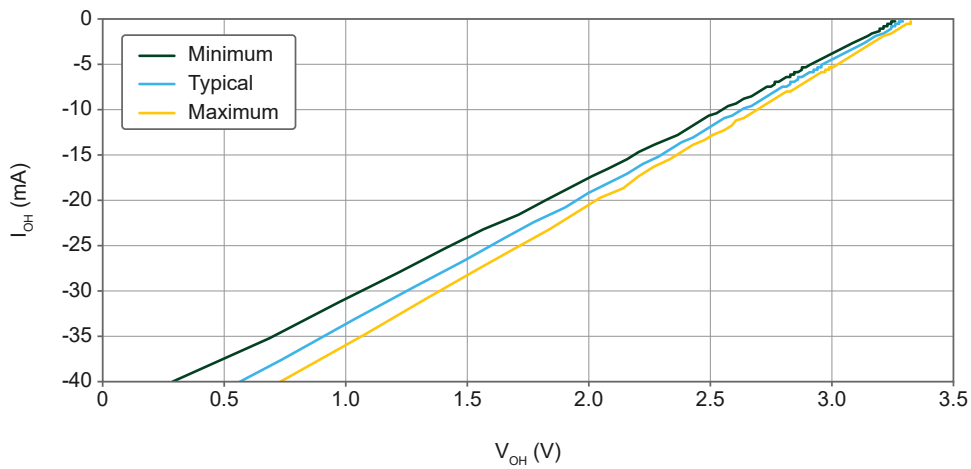
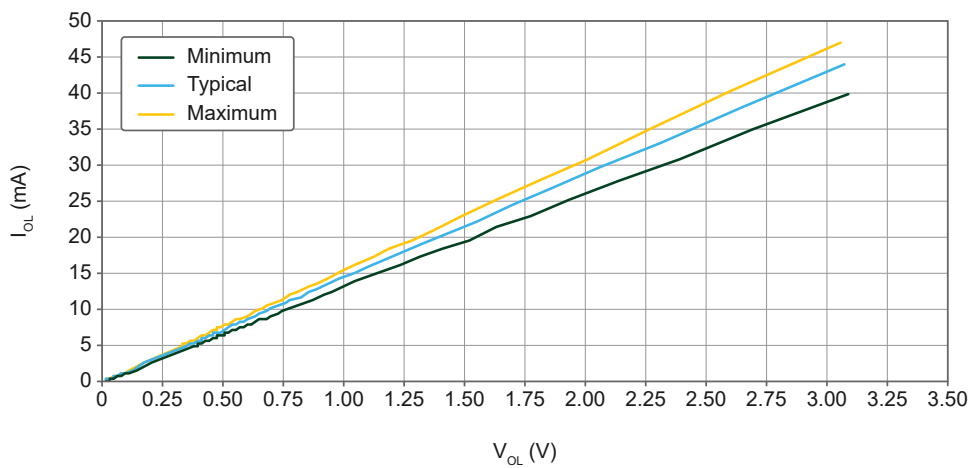
Figure 11. I_{OL} versus V_{OL} , 2.5 V Logic FamilyFigure 12. I_{OH} versus V_{OH} , 3.3 V Logic FamilyFigure 13. I_{OL} versus V_{OL} , 3.3 V Logic Family

Figure 14. I_{OH} versus V_{OH} , 5.0 V Logic Family


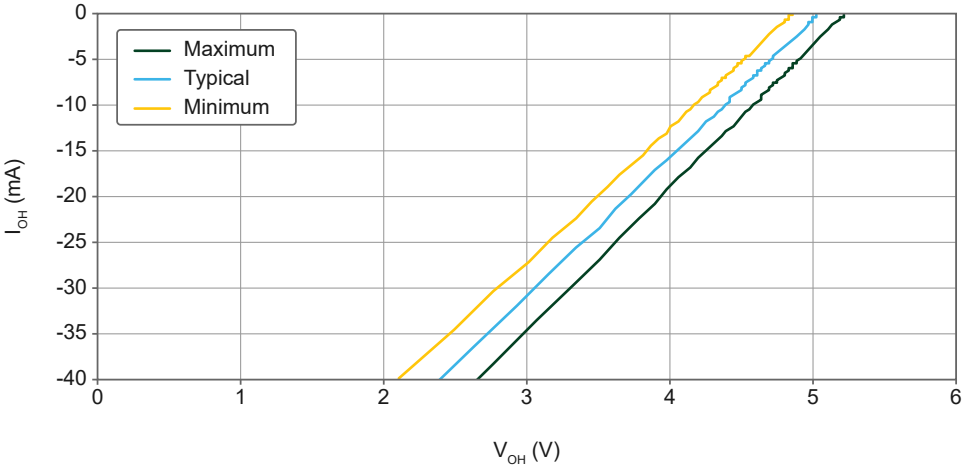


Figure 15. I_{OL} versus V_{OL} , 5.0 V Logic Family

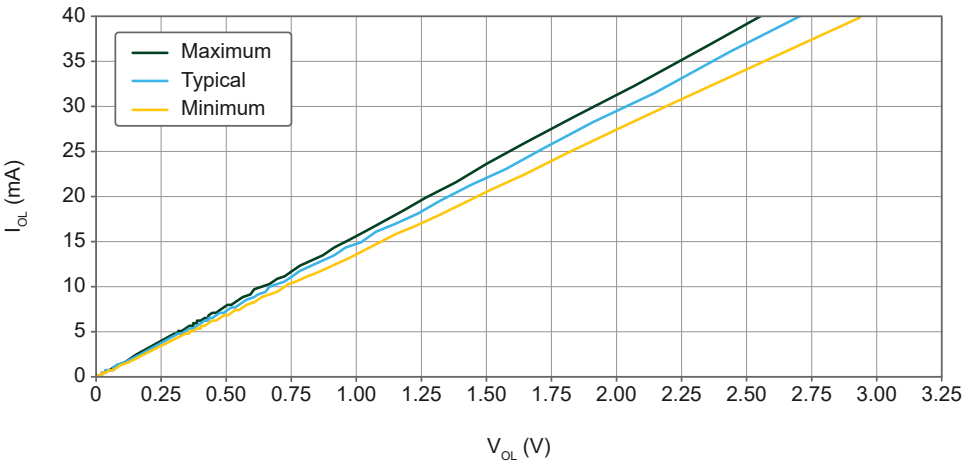

General-Purpose Counters

Number of counters/timers	4
Resolution	32 bits
Counter measurements	Edge counting Pulse Pulse width

	Semi-period Period Two-edge separation
Position measurements	X1, X2, X4 quadrature encoding with Channel Z reloading Two-pulse encoding
Output applications	Pulse Pulse train Frequency division Equivalent time sampling
Internal base clocks	100 MHz 20 MHz 100 kHz
External base clock frequency	0 MHz to 25 MHz
Base clock accuracy	50 ppm
Inputs	Gate Source HW_Arm

	Aux A B Z Up_Down Sample Clock
Routing options for inputs	Any PFI, many internal signals
FIFO	1,023 samples per counter
Data transfers	USB Signal Stream, Programmed I/O

Frequency Generator

Number of channels	1
Base clocks	100 MHz 20 MHz 100 kHz
Divisors	1 to 16
Base clock accuracy	50 ppm

Output can be available on any PFI terminal.

External Digital Triggers

Source	Any PFI
Polarity	Software-selectable for most signals
Analog input function	Start Trigger Reference Trigger Pause Trigger Sample Clock Sample Clock Timebase
Analog output function	Start Trigger Pause Trigger Sample Clock Sample Clock Timebase
Counter/timer functions	Gate Source HW_Arm Aux A B

	Z Up_Down Sample Clock
Digital waveform generation (DO) function	Start Trigger Pause Trigger Sample Clock Sample Clock Timebase
Digital waveform acquisition (DI) function	Start Trigger Reference Trigger Pause Trigger Sample Clock Sample Clock Timebase

Bus Interface

USB compatibility	USB 3.0/USB 3.1 Gen 1/USB 3.2 Gen 1 SuperSpeed or USB 2.0 Hi-Speed ²
USB Signal Stream	8, can be used for analog input, analog output, digital input, digital output, or counter input

- Operating on a Hi-Speed bus results in lower performance, and you might not be able to achieve maximum sampling/update rates.

USB connector	USB Type-C
---------------	------------

USB-6423 (OEM) LED Color Control Status

Logic level	3.3 V
Output resistance	470 Ω
Protection	± 20 V

Onboard Temperature Sensors

The following specifications do not apply to the USB-6423 (OEM).

Number of channels	2 (device temperature sensor and cold-junction compensation sensor)
Cold-junction compensation accuracy ³	± 1.5 °C



Note Refer to the ***Onboard Temperature Sensing*** section in the ***USB-6423 and USB-6423 (OEM) User Manual*** for more information.

Related information:

- [Onboard Temperature Sensing](#)

3. When measuring thermocouples, the overall temperature measurement error is the sum of the cold-junction compensation accuracy, measurement error due to the AI absolute accuracy, and the thermocouple error, which depends on the thermocouple type being used. The cold-junction compensation accuracy specification is valid for the USB-6423 only. USB-6423 (OEM) (OEM) accuracy depends on the application and must be characterized by the end user.

+5 V Power Source

Voltage accuracy	No load	+4.87 V to +5.22 V
	Maximum current	+4.76 V to 5.17 V

Maximum load current ⁴	
Connected to USB 2.0 Hi-Speed port with 2.5 W power	50 mA
Connected to USB 3.0 SuperSpeed port with ≥4.5 W power	280 mA

Power on state	Always on (no user control)
Overdrive protection during power on/off	±30 V

Power Requirements



Caution The protection provided by the USB-6423 can be impaired if it is used in a manner not described in the ***USB-6423 and USB-6423 (OEM) User Manual***.

USB power rating	4.0 W (800 mA at nominal 5 V)
Power input mating connector	USB Type-C plug for power and data

4. The USB-6423 will self-detect the power capability of USB host to configure the current limit. If the USB-6423 is at 280 mA limit, it will lower the current limit to 50 mA if there is overdrive or fault condition. The current limit will be reset back to the default 280 mA limit when the fault or load is removed.



Note The USB-6423 could function with a USB 2.0 port with 2.5 W power capability, but you will need to limit the I/O utilization. For example, you could reduce the load current of the four analog output channels to 1 mA.

Related information:

- [USB-6423 and USB-6423 \(OEM\) User Manual](#)

Current Limit

DIO and +5 V terminals combined ⁵	Connected to USB 2.0 Hi-Speed port with 2.5 W power	50 mA
	Connected to USB 3.0 SuperSpeed port with ≥ 4.5 W power	280 mA

Maximum Working Voltage

Maximum working voltage refers to the signal voltage plus the common-mode voltage.

Channel to earth	11 V, Measurement Category I
------------------	------------------------------

Measurement Category

This product is rated for Measurement Category I.



Caution Do not connect the product to signals or use for measurements within Measurement Categories II, III, or IV.

5. The USB-6423 will self-detect the power capability of the USB host to configure the current limit. If the USB-6423 is at 280 mA limit, it will lower the current limit to 50 mA if there is an overdrive or fault condition. The current limit will be reset back to the default 280 mA limit when the fault or load is removed.



Remarque Ne pas connecter le produit à des signaux dans les catégories de mesure II, III ou IV et ne pas l'utiliser pour effectuer des mesures dans ces catégories.

Measurement Category I is for measurements performed on circuits not directly connected to the electrical distribution system referred to as MAINS voltage. MAINS is a hazardous live electrical supply system that powers equipment. This category is for measurements of voltages from specially protected secondary circuits. Such voltage measurements include signal levels, special equipment, limited-energy parts of equipment, circuits powered by regulated low-voltage sources, and electronics.



Note Measurement Categories CAT I and CAT O are equivalent. These test and measurement circuits are for other circuits not intended for direct connection to the MAINS building installations of Measurement Categories CAT II, CAT III, or CAT IV.

Physical Characteristics

Product Version	I/O Connector
USB-6423	2x 36-position spring terminals
USB-6423 (OEM)	2x 50-pin, 0.100 in. x 0.100 in. ribbon cable header

Product Version	Dimensions
USB-6423	116.7 mm x 177.0 mm x 30.4 mm (4.59 in. x 6.97 in. x 1.20 in.)
USB-6423 (OEM)	109.22 mm x 167 mm x 13.6 mm (4.3 in. x 6.58 in. x 0.14 in.)

Product Version	Weight
USB-6423	590 g (1.30 lb)
USB-6423 (OEM)	95.1 g (0.21 lb)

Field Wiring Specifications

The following field wiring specifications do not apply to the USB-6423 (OEM).

Use copper wiring for all connections unless otherwise stated.

Gauge	0.14 mm ² to 1.5 mm ² (26 AWG to 16 AWG) copper conductor wire
Wire strip length	10 mm (0.394 in.) of insulation stripped from the end
Temperature rating	-25 °C to 120 °C
Wires per terminal	One wire per spring terminal; two wires per spring terminal using a 2-wire ferrule

Ferrules	
Single ferrule, uninsulated	0.14 mm ² to 1.5 mm ² (26 AWG to 16 AWG) 10 mm barrel length
Single ferrule, insulated	0.14 mm ² to 1.0 mm ² (26 AWG to 18 AWG) 12 mm barrel length
Two-wire ferrule, insulated	2x 0.34 mm ² (22 AWG) 12 mm barrel length

Connector securement	
Securement type	Screw flanges
Torque for screw flanges	0.2 N · m (1.80 lb · in.)

USB-6423 (OEM) Connectors

You can connect the following I/O connectors on the USB-6423 (OEM) using a 0.100 in. x 0.100 in. pitch ribbon cable or PCB socket. Refer to the manufacturer's data sheet for compatibility information.

Table 15. USB-6423 (OEM) Connectors

Connector	Component	Reference Designator(s) on PCB	Manufacturer	Manufacturer Part Number
AI	50-pin header	P1	3M	N2550-6002RB
AO/DIO	50-pin header	P2	3M	N2550-6002RB

Environmental Characteristics

Temperature	
Operating temperature	0 °C to 55 °C
Storage temperature	-20 °C to 70 °C

Humidity	
Operating humidity ⁶	10% RH to 90% RH, noncondensing

6. The USB-6423 will perform at the full accuracy specification up to 90% RH operating humidity at ≤40

Storage humidity	5% RH to 95% RH, noncondensing
------------------	--------------------------------

Pollution Degree	2
Maximum altitude	2,000 m

The following shock and vibration specifications do not apply to the USB-6423 (OEM).

Shock and vibration	
Operating vibration	5 Hz to 500 Hz, 0.3 g RMS
Non-operating vibration	5 Hz to 500 Hz, 2.4 g RMS
Operating shock	30 g, half-sine, 11 ms pulse

Calibration

Recommended warm-up time	15 minutes
Recommended calibration interval	2 years

Ihr NI-Partner: 

AMC – Analytik & Messtechnik GmbH Chemnitz

Heinrich-Lorenz-Str. 55 Tel.: +49/371/38388-0
 09120 Chemnitz Fax: +49/371/38388-99
 E-Mail: info@amc-systeme.de Web: www.amc-systeme.de

°C.

 Integration Partner

SYSTEM INTEGRATOR

Irrtum und Änderungen vorbehalten – auch ohne vorherige Ankündigung. Verwendete Hardware- und Softwarebezeichnungen, Marken sowie Firmennamen können eingetragene Warenzeichen sein und unterliegen somit den gesetzlichen Bestimmungen. / Information in this document is subject to change without prior notice. The software and hardware designations or brand names used in this text are in most cases trademarks or registered trademarks of their respective companies and are thus subject to law.