

ADAM-250PN

16 DI/O IP67 M12 PROFINET/Modbus/SNMP Remote I/O Module



Specifications

General

- **Certification** FCC, CE
- **Power Consumption** 6W @ 24 V_{DC}
- **Input Current** Max. 12 A ±20% (X1–X4, U_S) and 12 A ±20% (X5–X8, U_A)
- **Actuator (Encoder) Supply (24V)** 0.5 A (Max. 1A) per each A-code M12 Support short-circuit protection for each A-code M12
- **Support Power and Ethernet 2-port Daisy Chain Connection**
- **Support Power Reverse Polarity Protection**
- **Diagnostics Function** DO (by channel): Over current, Short to ground/power
DI (by channel): Wire-break
Encoder Supply: Over current
Power Input: Over voltage (30V), under voltage (18V), over current 12A (U_S or U_A)
- **I/O Channels** 16 (Configurable DI or DO)

Digital Input

- **Channels** Max. 16 (Configurable), Sink(NPN) Type Support Type 3
- **IEC 61131-2** Input Voltage Logic level 0: 0-5 V_{DC}
Input Voltage Logic level 1: 11-30V_{DC}
Input Current Logic level 1: 2.4 mA (typical)
- **Filter (Input Delay)** 0.05ms/ 0.1ms/ 0.4ms/ 0.8ms/ 1.6ms/ 3.2ms/ 12.8ms/ 20ms (configurable per each channel)

Digital Output

- **Channels** Max. 16 (Configurable), Source Type
- **Output Current** U_S: 0.5 A/channel (Max. 1A)
U_A: 2 A/channel (Max. 2.6A)
- **Switching Frequency** U_S: 0.5A 100 Hz at rated load 48 ohm
U_A: 2A 40 Hz at rated load 12 ohm
- **Output delay** 0 to 1:
U_S: 0.5A 100 us at rated load 48ohm
U_A: 2A 150 us at rated load 12 ohm
1 to 0:
U_S: 0.5A 150 us at rated load 48 ohm
U_A: 2A 2.5 ms at rated load 12 ohm
- **Load Impedance** 48 ~ 4K ohm @U_S
12 ~ 4K ohm @U_A
- **Support short-circuit protection for each channel**
- **Support configurable reactions to CPU STOP (Safety Mode): Shutdown, keep last value and output substitute value 1**

Features

- Offers 16-ch configurable DIO and 2-port power/ethernet daisy chain
- IEC 61131-2 type 3 sink DI and fast response source DO
- Support I/O and power diagnostic and DO safety value protection functions
- Complete LED indicator monitoring system/network/diagnostic/power status
- Enables cabinet-free front and side wall & machine mounting
- Compatible with M12 Screw lock and Push-pull fast-locking
- Rugged and IP67 design withstands strong EMI, vibration, dust, oil, and humidity atmospheres—ideal for outdoor and hazardous applications
- Built in actuator/encoder power supply from each I/O port
- Convenient printable marking label installation
- Supports multiple protocol such as PROFINET and Modbus/TCP

Ihr Ansprechpartner: 
AMC – Analytik & Messtechnik GmbH Chemnitz
 Heinrich-Lorenz-Str. 55 Tel.: +49/371/38388-0
 09120 Chemnitz Fax: +49/371/38388-99
 E-Mail: info@amc-systeme.de Web: www.amc-systeme.de

Common Specifications

General

- **Power Input** Unregulated 24 V_{DC} ±20%
- **Ethernet** 2-port 100Base-T(X) (with Daisy Chain and integrated switch)
- **Protocols** PROFINET, Modbus/TCP, TCP/IP
- **Watchdog Timer** System (600 ms) & Communication
- **Degree of Protection** IP67
- **Connector** M12, Push-pull fast connection according to IEC 61076-2-010 or screw connection according to IEC 61076-2-101

Area	Connector	M12 Cable Type
Ethernet	E1-E2	D-code Female 4-pin
I/O	X1-X4 (U _S) X5-X8 (U _A)	A-code Female 5-pin
Power Input	P1	L-code Male 5-pin
Power Output	P2	L-code Female 5-pin

- **Isolation Voltage** 750 V_{DC} between U_S & U_A, 1,500 V_{DC} (Ethernet)
- **Mounting** Wall, Machine
- **Mechanical tests** Vibration resistance in accordance with 20g (EN/IEC 60068-2-6)
Shock in accordance with 30g
Continuous shock in accordance with 25g (EN/IEC 60068-2-27)
EN 50155 compliance (IEC 61373 body mount class B)

PROFINET

- **Protocols** LLDP, MRP client, DCP, I&M data, FSU, SNMP
- **Conformal Class** B (RT), 1ms
- **I&M Data** I&M0 - I&M4
- **Fast Start Up (FSU)** <500ms

Environment

- **Operating Humidity** 5 ~ 95% RH (Non-condensing)
- **Operating Temperature** -40 ~ 60 °C (-40 ~ 140 °F)
- **Altitude** 2000 m
- **EMC protection** ESD ±8 kV (Contact), ±15 kV (air); EFT ±2 kV; Surge ±1 kV

Ihr
Ansprechpartner:




AMC – Analytik & Messtechnik GmbH Chemnitz

Heinrich-Lorenz-Str. 55 Tel.: +49/371/38388-0
09120 Chemnitz Fax: +49/371/38388-99
E-Mail: info@amc-systeme.de Web: www.amc-systeme.de

ADAM-250PN

ADAM-200PN Series

Unit: mm

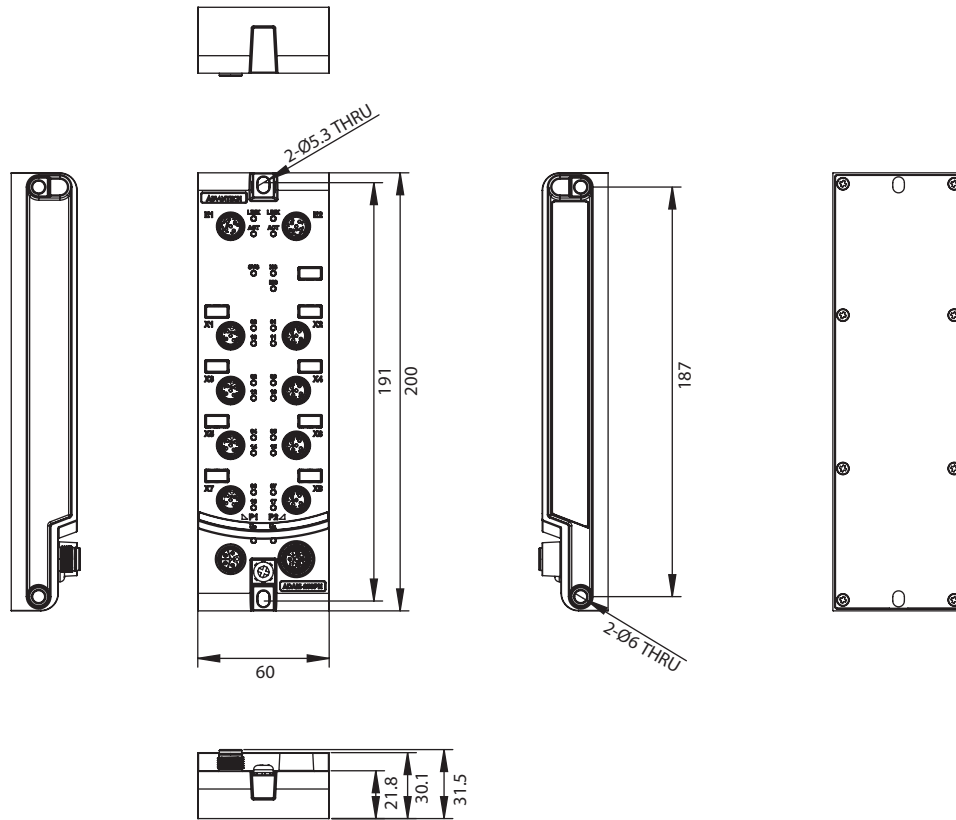

Ordering Information

- **ADAM-250PN-A** 16-Ch DIO M12 I/O Module
- **1930006316-01** Front wall mounting screw
- **1930009197** Side wall mounting screw
- **1990041839S000** Printable marking label (10pcs per set)



- **1655006291-01** Female M12 waterproof cover
- Please contact Advantech if there's more cable or accessory requirement