


AIMB-788

LGA1700 12th/13th/14th Generation Intel® Core™ i9/i7/i5/i3 ATX Motherboard with DP/HDMI/VGA, DDR4, USB 3.2, M.2

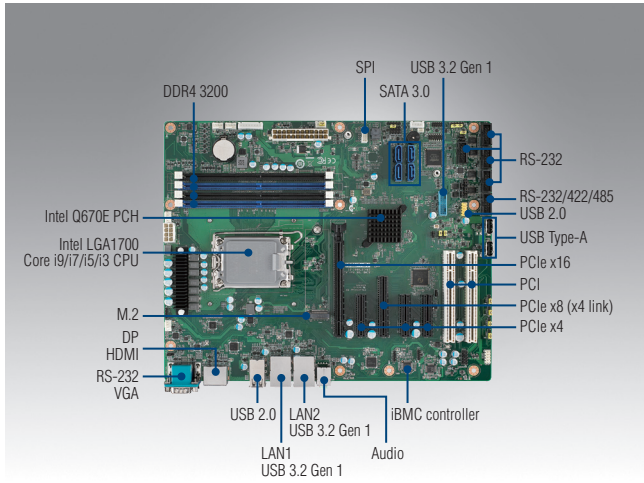

Features

- Intel® 12th/13th/14th generation Core™ i9/i7/i5/i3 & Pentium®/Celeron® processor with Q670E chipset
- Four DIMM sockets up to 128 GB DDR4 3200
- Triple display DP/HDMI/VGA and dual GbE LAN
- M.2, SATA RAID 0, 1, 5, 10, USB 3.2 Gen 2
- Advantech iBMC remote out-of-band power management solution on DeviceOn
- Qualified for AWS (Amazon Web Service) IoT Greengrass

Note 1: Legacy platform is not supported.

Note 2: dTPM 2.0 module is required to enable Intel vPro and TPM technologies.

Note 3: Intel® Platform Trust Technology (Intel® PTT) ready for Windows 11.

Quiet Specifications



14th Generation Processors	CPU	I9-14900	I9-14900T	I7-14700	I7-14700T	I5-14500	I5-14500T	I5-14400	I5-14400T	I5-14400F	I3-14100	I3-14100T	300	300T			
	P-core Base Frequency	2.0 GHz	1.1 GHz	2.1 GHz	1.3GHz	2.6 GHz	1.7 GHz	2.5 GHz	1.5 GHz	2.5 GHz	3.5 GHz	2.7 GHz	3.9 GHz	3.4 GHz			
	L3 Cache	36 MB	36 MB	33 MB	33 MB	24 MB	24 MB	20 MB	20 MB	20 MB	12 MB	12 MB	6 MB	6 MB			
	Cores	24	24	20	20	14	14	10	10	10	4	4	2	2			
Processor Base Power	65 W	35 W	65 W	35 W	65 W	35 W	65 W	35 W	65 W	60 W	35 W	46 W	35 W				
13th Generation Processors	CPU	i9-13900(E)	i9-13900TE	i7-13700(E)	i7-13700T(E)	i5-13500(E)	i5-13500T(E)	i5-13400(E)	i3-13100(E)	i3-13100T(E)							
	P-core Base Frequency	2.0 GHz	1.1 GHz	2.1 GHz	1.4 GHz	2.5 GHz	1.6 GHz	2.5 GHz	3.4 GHz	2.5 GHz							
	L3 Cache	36 MB	36 MB	30 MB	30 MB	24 MB	24 MB	20MB	12 MB	12 MB							
	Cores	24	24	16	16	14	14	10	4	4							
Processor Base Power	65 W	35 W	65 W	35 W	65 W	35 W	65W	60 W	35 W								
12th Generation Processors	CPU	i9-12900(E)	i9-12900TE	i7-12700(E)	i7-12700TE	i5-12500(E)	i5-12400	i5-12500TE	i3-12100(E)	i3-12100TE	Pentium G7400E	Pentium G7400TE	Celeron G6900E	Celeron G6900TE			
	P-core Base Frequency	2.4 GHz	1.1 GHz	2.1 GHz	1.4 GHz	3.0 GHz	2.5 GHz	1.9 GHz	3.3 GHz	2.1 GHz	3.6 GHz	3.0 GHz	3.0 GHz	2.4 GHz			
	L3 Cache	30 MB	30 MB	25 MB	25 MB	18 MB	18 MB	18 MB	12 MB	12 MB	6 MB	6 MB	4 MB	4 MB			
	Cores	16	16	12	12	6	6	6	4	4	2	2	2	2			
Processor Base Power	65 W	35 W	65 W	35 W	65 W	65 W	35 W	60 W	35 W	46 W	35 W	46 W	35 W				
Processor System	Socket	LGA 1700															
	Chipset	Q670E															
Expansion Slot	BIOS	AMI 256Mbit SPI Flash															
	PCI	2															
Memory	Technology	Dual Channel DDR4 3200 Non-ECC UDIMM															
	Max Capacity	128 GB															
	Sockets	4 x 288-pin DIMM															
Graphics	Controller	Chipset integrated Intel UHD Graphics															
	VRAM	Shares system memory is subjected to OS															
Ethernet	Interface	10/100/1000 Mbps															
	Controller	GbE LAN1: Intel I219-LM (PHY); GbE LAN2: Intel I210-AT															
SATA	Connector	2 x RJ-45															
	Max. Data Transfer Rate	600 MB/s															
Rear I/O	Channel	4															
	RAID	0, 1, 5, 10															
	VGA	1 (Resolution up to 1920 x 1200 @ 60Hz)															
	HDMI	1 (Resolution up to 3840 x 2160 @ 60Hz)															
Watchdog Timer	DisplayPort	1 (Resolution up to 4096 x 2304 @ 60Hz)															
	Ethernet	2															
	USB	8 (2 x USB 3.2 Gen 2, 2 x USB 3.2 Gen 1, 4 x USB 2.0)															
	Audio	2 (Line-out, Mic-in)															
	Serial	1 (RS-232)															
Power Requirement	Output	System reset															
	Interval	Programmable 1 – 255 sec															
Internal Connectors	Power On	Intel Core i 65W , DDR4 32 GB x 4															
	Voltage	+3.3 V			+5 V			+12 V			+5 Vsb			-12 V		-5 V	
	Current	1.41 A			2.42 A			0.24 A			0.13 A			0.04 A		0.05 A	
Environment	USB	6 (2 x USB 3.2 Gen 1 via pin header, 2 x USB 2.0 via pin header, 2 x USB 2.0 type A connector)															
	Serial	5 (4 x RS-232, 1 x RS-232/422/485)															
	SATA	4															
	M.2	1 (PCIex4 Gen 4 M-key 2280 type)															
	SPI	1 (Optional dTPM 2.0 module available)															
	GPIO	8-bit															
Physical Characteristics	Operating	Non-Operating															
	Temperature	0 – 60 °C (32 – 140 °F), depends on CPU loading and system thermal solution										-40 – 85 °C					
Humidity	95% @ 40 °C, non-condensing										95% @ 60 °C, non-condensing						
Dimension (L x H)	304.8 x 244 mm (12" x 9.6")																

* The PCIe x16 slot, from CPU, can only support graphic cards and storage cards according to the specification recommended by Intel. Other types of add-on cards might not work properly. For the compatible device list validated on the PCIe x16 slot, please refer to the user manual.

Vertrieb durch



AMC – Analytik & Messtechnik GmbH Chemnitz


Heinrich-Lorenz-Str. 55 Tel.: +49/371/38388-0
09120 Chemnitz Fax: +49/371/38388-99

E-Mail: info@amc-systeme.de Web: www.amc-systeme.de



ADVANTECH iAutomation
Premier Partner

Block Diagram

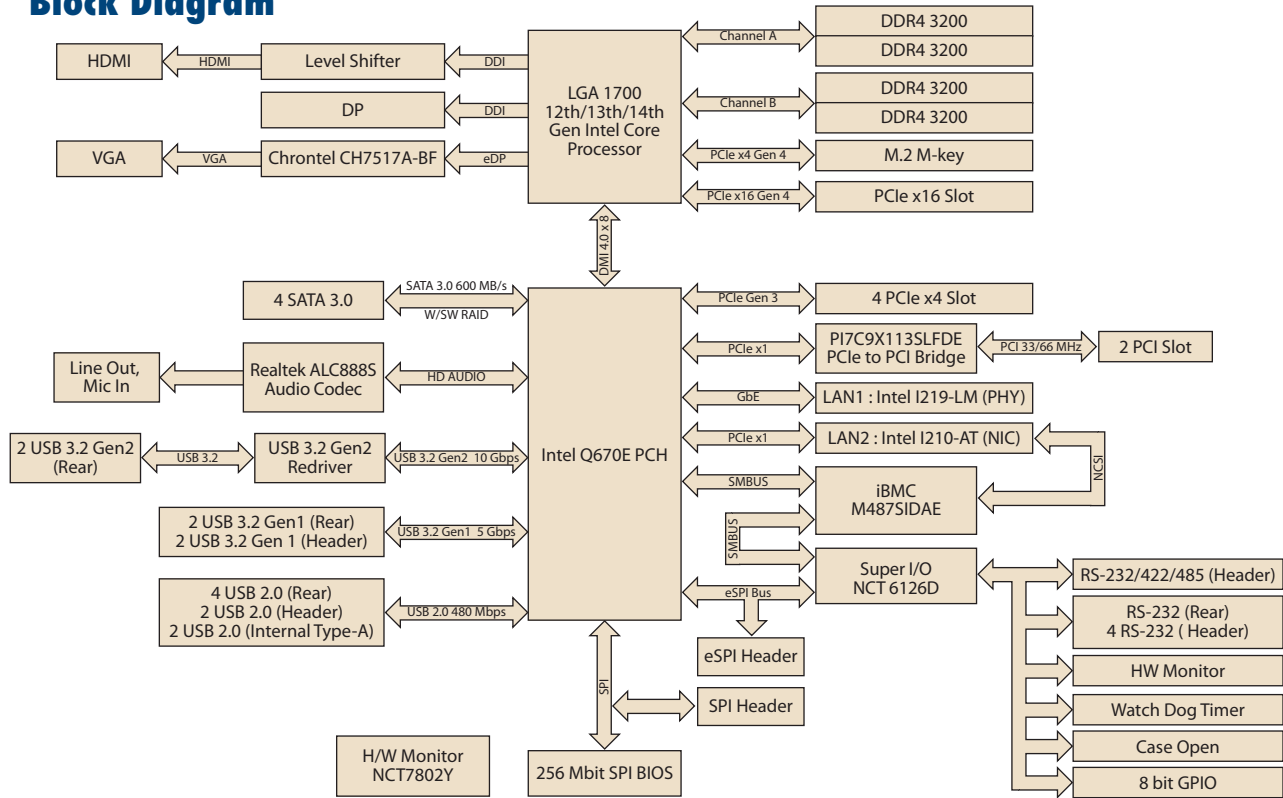

Ordering Information

Part number	Chipset	Memory	Display	USB 3.2 Gen 2	USB 3.2 Gen 1	USB 2.0	COM	GbE LAN	AMT	M.2	SATA 3.0	SW RAID	iBMC
AIMB-788G2-00A1	Q670E	Non-ECC UDIMM DDR4 3200 up to 128 GB	VGA + HDMI + DP	2	4	8	6	2	Yes	1	4	Yes	Yes
AIMB-788G2-00A1U	Q670E	Non-ECC UDIMM DDR4 3200 up to 128 GB	VGA + HDMI + DP	2	4	8	6	2	Yes	1	4	Yes	Yes

Packing List

Part Number	Description	Qty
1700003194	SATA data cable	2
1960104181T001	I/O port bracket (for 2U chassis or higher)	1
2041078800	Startup manual	1

Note: Driver CD is not provided. Please visit Advantech support website for driver download.

I/O View



AIMB-788G2-00A1
AIMB-788G2-00A1U

Optional Accessories

Part number	Description
1700002204	2-port USB 2.0 cable w/ BKT(27 cm)
1700028292-01	2-port USB 3.0 cable w/ BKT(30 cm)
1970005349T000	CPU cooler for 2U, 4U, and wallmount chassis (for CPU Base Power=35~125W)
1701090401	Single COM port cable(40 cm)
1701092300	Dual COM port cable(28.5 cm)
1700022749-11/ 1700022749-12/ 1700022749-13	SATA power cable
PCA-TPMSPI-00A1	dTPM 2.0 SPI module to enable TPM and vPro technologies

Note: Purchasing AIMB-788's proprietary CPU cooler from Advantech is highly recommended. Other brands' CPU coolers are NOT compatible with AIMB-788. Especially the cooler type with fan aside is not allowed to use on AIMB-788 due to heat dissipation on MOSFET.

Riser Card

Part Number	Description
AIMB-R430P-03A2E	2U riser card with 3 PCI expansion
AIMB-R431F-21A1E	2U riser card with 1 PCIe16 & 1 PCIe1 expansion
AIMB-R43PF-21A1E	2U riser card with 1 PCIe16 & 2 PCI expansion
AIMB-R4301-03A2E	2U riser card with 1 PCIe1 expansion

Note: AIMB-788 is not compatible with 1U chassis.