

ITA-460

Water-resistant Fanless In-vehicle Computer with Intel® 8th/9th Gen Core™ i CPU



Features

- Intel® 8th/9th Gen Core™ i CPU (LGA1151)
- 8GB memory on board, 1 x SO-DIMM
- Supports 2 x Gigabit Ethernet, 2 x USB3.0/3.1
- Supports 2 x COM (RS232/422/485)
- Supports 1 x mSATA, 2 x 2.5" HDD/SSD
- Supports 3 x mini PCIe expansion sockets for integrating Wi-Fi, LTE, and GPS wireless communication modules through reserved 6 SMA connectors
- Supports 12/24V_{DC} vehicle power
- All-around IP65 rating for protection from water and dust ingress
- Wide operating temperature (-25 ~ 60 °C / -13 ~ 140 °F)
- No RED Certificate



Vertrieb durch 

AMC – Analytik & Messtechnik GmbH Chemnitz


Heinrich-Lorenz-Str. 55 Tel.: +49/371/38388-0
 09120 Chemnitz Fax: +49/371/38388-99
 E-Mail: info@amc-systeme.de Web: www.amc-systeme.de

Specifications


8th/9th Generation Processor (TDP 35W)	CPU	I7-9700TE	I5-9500TE	I3-9100TE	i7-8700T	i5-8500T			
	Core/Thread Number	8/8	6/6	4/4	6/12	6/6			
	Base Frequency	1.8GHz	2.2GHz	2.2GHz	2.4 GHz	2.1 GHz			
	Max Turbo Frequency	3.8GHz	3.6GHz	3.2GHz	4.0 GHz	3.5 GHz			
	L3 Cache	12MB	9MB	6MB	12MB	9MB			
	Chipset	H310							
	BIOS	AMI 256Mb SPI Flash							
8th/9th Generation Processor (TDP 65W)	CPU	I7-9700E	I5-9500E	I3-9100E	i7-8700	i5-8500	i3-8100	G5400	G4900
	Core/Thread Number	8/8	6/6	4/4	6/12	6/6	4/4	2/4	2/2
	Base Frequency	2.6GHz	3.0GHz	3.1GHz	3.2GHz	3.0GHz	3.6GHz	3.7GHz	2.9GHz
	Max Turbo Frequency	4.4GHz	4.2GHz	3.7GHz	4.6GHz	4.1GHz			
	L3 Cache	12MB	8MB	6MB	12MB	9MB	6MB	4MB	2MB
	Chipset	H310							
	Temperature	-10 ~ 40 °C (with Industrial SSD, 0.7 m/s air flow)							
Memory	BIOS	AMI 256Mb SPI Flash							
	Technology	Dual-channel DDR4 2400 MHz (without ECC)							
	Solder-down	8GB on board (optional 16GB on board)							
	Socket	1 x 260-pin DDR4 SO-DIMM (up to 16GB per socket)							
Display	Maximum Capacity	16GB (optional 32GB)							
	Chipset	H310: Intel® HD Graphics 610, supports DirectX 12							
Ethernet	HDMI	1X HDMI (HDMI1.4b: up to 4096 x 2160@30Hz)							
	Controller	Intel® i210IT							
Storage	Interface	2 x Gigabit Ethernet with M12 X-Coded							
	SATA	2 x maximum 9 mm 2.5" HDD/SSD							
I/O	mSATA	1 x mSATA slot on board							
	USB	2 x USB3.0/3.1							
Expansion	Serial Port	DB9 x 1 (2 x RS-232/422/485 support sw programmable)							
	Audio	M12 A-Coded x 1 (1 x line out and 1 x mic in)							
LED	Mini PCIe	H310: 3 x mini PCIe (PCIe Gen3 x 1, USB 2.0 with 1 SIM slot)							
Power	LED	4 (1 x power, 1 x storage, and 2 x LAN)							
	Type	AT/ATX							
	Input Voltage	8 ~ 32 V _{DC} (9.6 ~ 28.8V _{DC} full loading)							
Watchdog Timer	Power consumption	Typical: 33W, maximum: 95W							
	Output	System reset							
Environment	Interval	Programmable 1 ~ 255 sec/min							
	Operating Temperature	35W CPU w/ industrial SSD							
	Storage Temperature	-25 ~ 60 °C / -13 ~ 140 °F with 0.7 m/s air flow							
	Humidity	-40 ~ 85 °C							
	Vibration	95% @ 40 °C (non-condensing)							
Mechanical	Shock	MIL-STD-810G, IEC 60721-3-5 Class 5M3 (Maximum: 5G, 8 hours, per axis)							
	Dimensions (W x H x D)	MIL-STD-810G (75G 11 ms), IEC-60721-3-5 Class 5M3 (Opreating: 100G 6ms)							
	Weight	190 x 70 x 220 mm (7.48" x 2.76" x 8.66")							
Certifications	Installation	4kg (8.82lbs)							
	IP	Desktop/wall mount							
OS Support	IP65 protection from water and dust ingress (IP-67 optional)								
	EMC	CE/FCC Class B, BSMI							
Safety	CB/UL 62368, CCC, Emark, ISO 7637-2, BSMI								
		Windows 10, Linux Ubuntu 20.04 (Canonical Ubuntu certified and provide the Ubuntu support for 5 years)							
		Windows 11 (With TPM:PCA-TPM-00B1E)							

Dimensions

Unit: mm

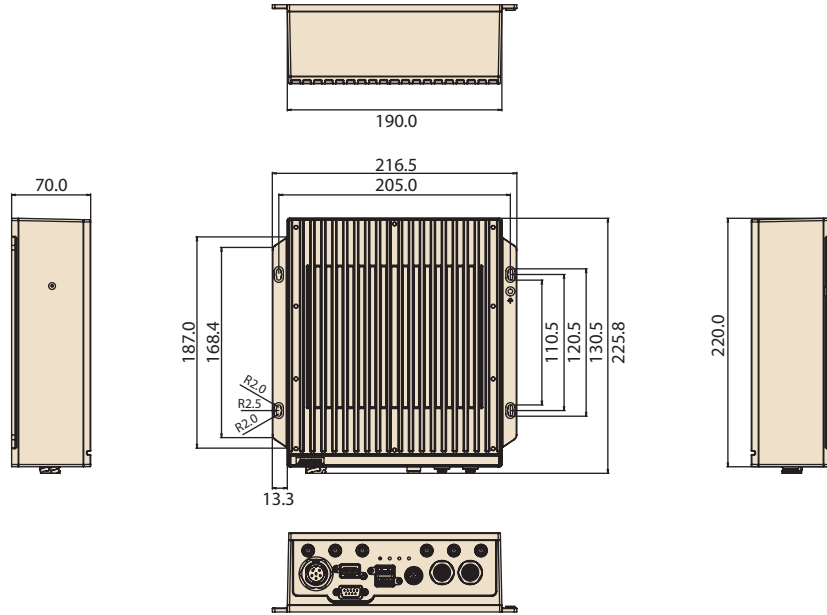

Front View

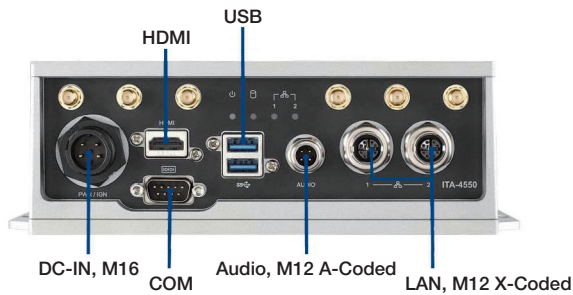

TPM

	Accessory	Description
TPM	TPM module	PCA-TPM-00B1E
	TPM Rubber	1990040892T000
	screw	1930005897-01
	TPM cable	1700034659-01

Ordering Information

Part Number	Description	HDMI	2.5"SSD slot	mSATA slot	USB3.0/3.1	LAN	COM	miniPCIe slot	Power	COO
ITA-460-LOA1	ITA-460, 8G onboard memory, barebone unit	1	2	1	2	2	2 (By Y cable)	3	8 ~ 32V _{DC}	China
ITA-460-LOA1U	ITA-460, 8G onboard memory, barebone unit	1	2	1	2	2	2 (By Y cable)	3	8 ~ 32V _{DC}	Taiwan
ITA-460-LOA2	ITA-460, 16G onboard memory, barebone unit	1	2	1	2	2	2 (By Y cable)	3	8 ~ 32V _{DC}	China

Optional Accessories

Part Number	Product Description
96PSA-A150W19P4-4	ADP A/D 100-240V 150W 19V C14 TERMINAL BLOCK 4P
1702002600	Power cord (USA) UL/CSA, 3-pin, 10A, 125V, 1.83 M, 180 D
1702002605	Power cord (EU), 3-pin, 10A, 250V 1.83M, 90D
1700000596-11	Power cord (CCC), 3-pin, 10A, 250V, 1.83 M, 180D
FRU-ITALAN-0003	External LAN cable (M12 X-Coded to RJ45)
FRU-ITAAUD-0002	External audio cable (M12 A-Coded to 2 x Audio Jack)

Accessory Box List

Accessory	Description
Power cable	M16 6P (female) to 6P twisting and tinning stranded wires, 15cm
COM cable	D-SUB 9P (female) to 2 x D-SUB 9P (male), 15cm
SSD kit	SSD bracket and 2 x SATA cable
miniPCIe kit	Inner heatsink bracket, miniPCIe bracket
Thermal pad	Pads for SO-DIMM memory, mSATA, miniPCIe