

MIC-712P-0X

AI Platform Based on NVIDIA® Jetson Orin™ NX

NEW



Features

- Ultra-slim design for mobile equipment in safety & security applications
- Embedded with NVIDIA® Jetson Orin™ NX
- Support 6 ports POE with 25W supply per port.
- Support NVIDIA super mode up to 157 TOPS performance
- Integrate Out-of-Band management within the system

Vertrieb durch



AMC – Analytik & Messtechnik GmbH Chemnitz

Heinrich-Lorenz-Str. 55 Tel.: +49/371/38388-0
09120 Chemnitz Fax: +49/371/38388-99
E-Mail: info@amc-systeme.de Web: www.amc-systeme.de



Specifications

		NVIDIA® Jetson Orin™ NX
Processor System	CPU	16GB: 8-core NVIDIA Arm® Cortex A78AE v8.2 64-bit CPU 8GB: 6-core NVIDIA Arm® Cortex A78AE v8.2 64-bit CPU
	GPU	1024-core NVIDIA Ampere GPU with 32 Tensor Cores
	Memory	16GB: 16GB LPDDR5 8GB: 8GB LPDDR5
	Flash	-
I/O	Ethernet	2 x 10/100/1000 Mbps 6 x 10/100/1000 Mbps POE. Support 30W per port, individual control, total power budget 150W
	Display	HDMI (Max. resolution 3840x2160 @ 60Hz)
	USB	External: 4 x USB 3.2 Gen 2
	Debug console	1 x Micro USB
	OTG USB	1 x Micro USB
Expansion	M.2 E-key	1 x 2230 E-key (Signal: PCIe + USB 2.0)
	M.2 B-key	1 x M.2 3052 (Signal: USB3.2)
	SIM	1 x Nano SIM slot 1 x eSIM (Optional)
	TPM (Optional)	1 x TPM 2.0
Storage	M.2	1 x M.2 2280 (Signal: PCIe x4) (pre-installed 128G SSD on A1 SKU)
	SD Card	1 x Micro SD
Power	Mode	AT
	Input Voltage	19 ~ 36 V _{DC}
Environment	Operating Temperature	-25 ~ 70 °C with 0.7 m/s airflow (25W power mode) -25 ~ 50 °C with 0.7 m/s airflow (40W power mode)
	Operating Humidity	95% @ 40 °C (non-condensing)
	Vibration	3 Grms @ 5 ~ 500 Hz, random, 1 hr/axis
	Shock	10G / 11ms
Mechanical	Dimensions (W x D x H)	160 x 160 x 70 mm (6.3" x 6.3" x 2.76")
	Weight	2.05 kg (w/o packing material)
	Installation	Desktop
BSP	Jetpack	JP6.2 or above
Certifications		CE/FCC/UKCA/CB/UL/BSMI/CCC (No RED certification)


Vertrieb durch

**AMC – Analytik & Messtechnik GmbH Chemnitz**

Heinrich-Lorenz-Str. 55 Tel.: +49/371/38388-0
 09120 Chemnitz Fax: +49/371/38388-99
 E-Mail: info@amc-systeme.de Web: www.amc-systeme.de

MIC-712P-OX**Dimensions**

Unit: mm

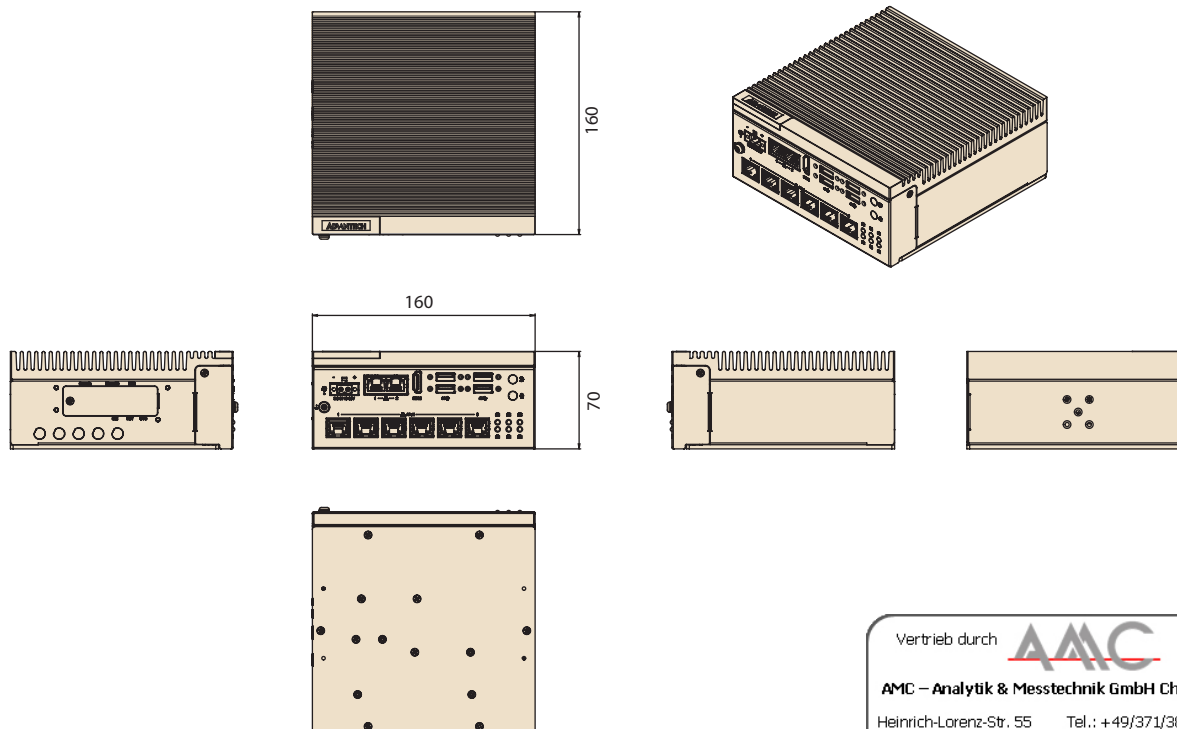

Vertrieb durch

**AMC – Analytik & Messtechnik GmbH Chemnitz**

Heinrich-Lorenz-Str. 55 Tel.: +49/371/38388-0
 09120 Chemnitz Fax: +49/371/38388-99
 E-Mail: info@amc-systeme.de Web: www.amc-systeme.de

Ordering Information

Part Number	NVIDIA Module	NVIDIA Module Memory	Installed Jetpack version	NVMe	Super mode support
MIC-712P-OX4A1	Orin NX	16GB	JP6.2	128GB pre installed	Yes
MIC-712P-OX3A1	Orin NX	8GB	JP6.2	128GB pre installed	Yes
MIC-712P-OX4A2	Orin NX	16GB	NA	NA	Yes
MIC-712P-OX3A2	Orin NX	8GB	NA	NA	Yes

Packing List

Part Number	Description	Quantity	Part Number	Description	Quantity
MIC-712P-OX	MIC-712 Fanless system	1	1930005673-11	Screw M3x4.5L for Peripheral	2
1652002202	Power connector - 2-pin	1	1960095312N001	Mounting Bracket	2
1700023619-01	Micro USB cable for System recovery	1	1930007979	Screw for mounting bracket	4

Optional

	Part Number	Description	Quantity
5G	AIW-356-DQ	5G Sub6+GNSS M.2 3052 Key B (by region)	1
	1751000623-01	Cable Ant. SMA/F MHF4L/113 BLK L300mm (5G)	4
	1750009372-01	Ant.SMA/M 90/180 5G BLK 167mm RG178 (5G)	4
AC/DC Adapter	XMIC-FSP230-AAAN3	ADP A/D 100-240V 230W 24V C14 TERMINAL BLOCK 2P	1
Power Cord	1702002600	Power Cord UL 3P 15A 125V C13 183 cm (US)	1
	1702002605	Power Cord EU 3P 10A 250V C13 183cm (EU)	1
	1702031801	Power Cord BSI 3P 10A 250V C13 183cm (UK)	1
	1700029019-01	Power Cord (PSE/BSMI), 3-pin, 7A, 125V, 1.8 M, DAC-ST01	1
	1700000596-11	Power Cord CCC 3P 10A 250V C13 183cm (China)	1
TPM	PCA-TPMSPI-00A1	PCA-TPMSPI-00A1	1
Cable	1700027920-01	Audio port cable (1 x Line-In + 1 x Mic)	1

Irrtum und Änderungen vorbehalten – auch ohne vorherige Ankündigung. Verwendete Hardware- und Softwarebezeichnungen, Marken sowie Firmennamen können eingetragene Warenzeichen sein und unterliegen somit den gesetzlichen Bestimmungen. / Information in this document is subject to change without prior notice. The software and hardware designations or brand names used in this text are in most cases trademarks or registered trademarks of their respective companies and are thus subject to law.